


caution: to ensure the proprietary flashings for this system can be installed correctly, please allow a gap of 24mm from the surface of the building paper to the backside of the aluminium joinery

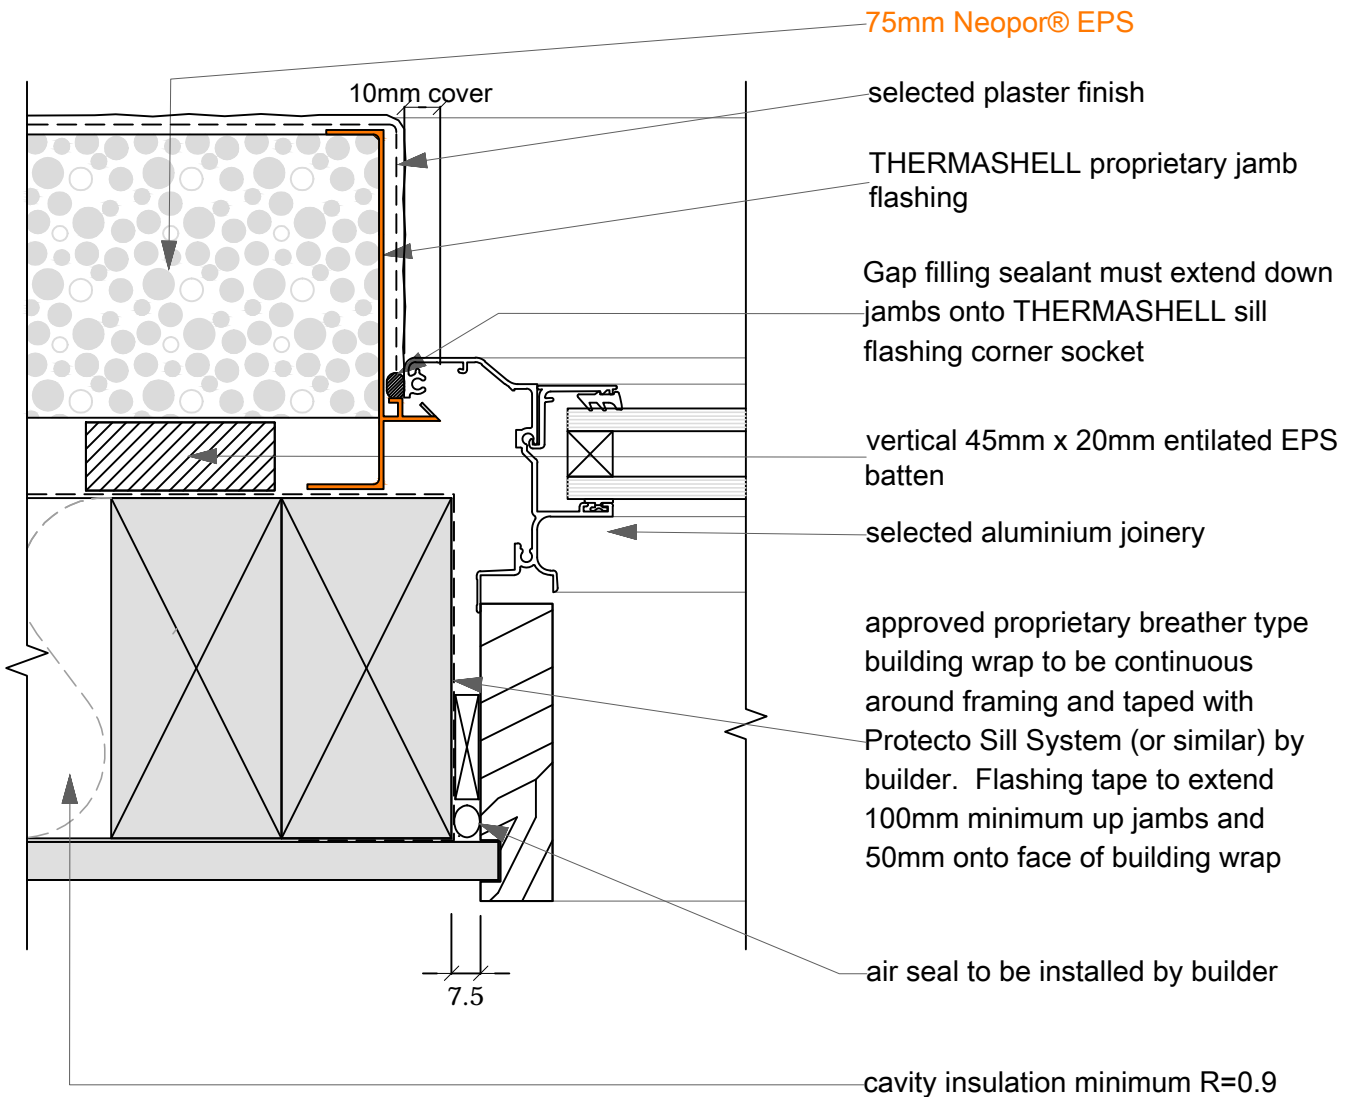

note: jambs and head flashing must be sealed or PVC welded where they intersect

**02A** **Window Jamb:**  
SCALE: 1:2 **THERMASHELL**