


# ARDEX WPM 195

## SANDED TORCH-APPLIED TANKING MEMBRANE

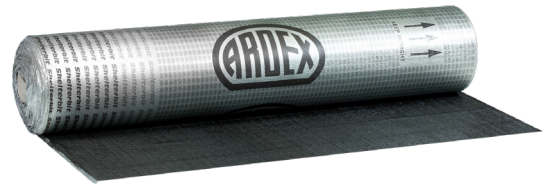

ARDEX WPM 195 is a high-performance, polymer-modified Styrene-Butadiene-Styrene (SBS) bituminous tanking membrane with a sanded finish. ARDEX WPM 195 has excellent strength and dimensional stability that provides superior waterproofing ability for tanking and below-ground application. ARDEX WPM 195 has excellent cold flexibility and can be applied at temperatures down to -20°C.

### Benefits

- CodeMark Certification (AQ-021216-CMNZ)
- European Certification (GB06/69203)
- High flexibility at sub-zero temperatures
- Maintains stability at high temperatures
- High resistance to perforation
- Accommodates structural movements
- Excellent resistance to atmospheric agents and chemical attacks

### Use

Vertical and horizontal below-ground tanking including;

- To the outside of a sub-structure of a building
- Under floor slabs
- The lining of in-situ or pre-cast concrete
- Retaining walls
- Lift shafts and pits
- Tunnels
- Planter boxes

### Location

- External below-ground application

### Substrates

Below-ground substrates including;

- In-situ concrete
- Pre-cast concrete

### Size

Roll of 1m x 8m x 4mm (8m<sup>2</sup>)

### Packaging

Roll

### Code

25075



To find out more  
call 0800 227 339 or  
visit [www.ardex.co.nz](http://www.ardex.co.nz)

Download the ARDEX app



search for:  
'ARDEX New Zealand'



SYSTEMARDEX  
PREMIUM PERFORMANCE