



Get the point

Flex

Product guide





Flex

No matter what Flex luminaire you choose, you can be confident that it will deliver high-quality LED light, ease of commissioning and installation, and proven reliability.

2	Introduction	4	Design
6	What makes Flex different?	8	Meet the family
12	Key features	14	Maximizing control
16	Flex showcase	22	Flex specifications and information
24	Flex dimensions		

Flex means flexibility

Bringing light, color, and motion to a structure helps add beauty, get attention, and make an impact. But today's more adventuresome architecture can be a challenge for lighting designers who want to add direct-view lighting to a curved wall, domed ceiling, or other unusual surfaces.

Our innovative, proven Flex family of direct-view LED luminaires meets these challenges—from displaying messages on curved building façades to bringing stunning LED light shows to stadium roofs. All Flex luminaires consist of flexible strands of efficient, addressable LED nodes that can be arranged along a nearly limitless array of surfaces and structures. The flexibility continues with a wide range of choices—color or white light, varying brightness, node spacings, strand length, lens options, beam angles, and more.

No matter what Flex luminaire you choose, you can be confident that it will deliver high-quality LED light, ease of commissioning and installation, and proven reliability. That's why so many lighting designers choose Flex for their more ambitious, artistic installations.

At Color Kinetics, we've been delivering advanced direct-view lighting solutions for more than a decade, bringing new excitement, attention, and beauty to landmark buildings, bridges, stadiums, and other high-profile structures around the world. Our full family of direct-view LED luminaires creates bright, addressable points of light (the Flex family and ArchiPoint) and lines of light (the Accent family and VAYA Tube family) that can be mounted on the exterior of a structure, highlighting architectural details, adding visual interest, and transforming buildings into eye-catching icons. Our direct-view luminaires can also display video, exciting color effects, messages, and more.

Created to meet the needs of the marketplace

The Flex family grew to meet the ever-changing needs of our customers—lighting designers, building owners, and other lighting professionals. We increased brightness, added new technical innovations, created new node designs and spacing, and created new options for strand length, lenses, power/data supplies, and other innovations. This commitment to innovation continues as the Flex family grows and evolves.

Ideal for a wide range of direct-view challenges

Every Flex direct-view installation is different. Some are informative, requiring bright white light to display important messages or upcoming events over a building entrance. Others seek to captivate an audience with stunning, full-color light shows on a large-scale

surface—such as a stadium roof or curved façade. And still others bring new light (and life) to iconic structures, such as monuments and bridges—even a landscape element. To meet the varying needs of these exterior applications, Flex is durable and weather-resistant. But it can also be used in interior applications, such as hard-to-reach alcoves, interior passageways, and other creative uses—such as theater set pieces. Its ability to bend and conform to almost any shape and dimension is a big advantage in interior and exterior applications.

From white to color, bright to brighter

Available in iColor, Intelligent White (iW), and Essential White (eW), Flex is right for a wide range of implementations—color, dynamic color, tunable white, or solid white. There are Flex solutions for interior and exterior implementations—from lighting a hard-to-reach interior cove to large-scale low-resolution video on an exterior façade. You can choose the Flex solution that provides the right brightness, ensuring that your design makes an impact up close, and can be seen clearly from a distance. And no matter what Flex luminaire you choose, you get the proven reliability you need, even under challenging conditions.

For today's boundary-pushing lighting designers, the Flex family provides a broad palette of options for bringing high-quality, precision-controllable points of LED light to diverse installations around the world.



Photography: Signify

Why do so many lighting designers choose Flex?

Flex is different from other luminaires—and, as many lighting designers tell us—more fun to work with.

Direct-view luminaires can do more than just illuminate a structure. They can add real excitement and engagement with attention-getting motion, animation, and even low-resolution video. Flex frees designers from the inherent limitations of rigid luminaires. Instead, Flex delivers greater flexibility, the freedom to think beyond straight lines—and yes, *more fun*.

Each member of our extensive family of Flex luminaires provides these core advantages.



Photography: Mark Steete

Flexibility

It's right there in the name. Flex means flexibility. Unlike linear luminaires, Flex gives you flexible, bendable, adjustable strands of LED nodes that you can configure and arrange as you see fit—from a consistent grid to complex geometries. Choose the brightness you need, the strand length that matches your structure, and the node spacing that delivers the right look and resolution.

Full Family of Solutions

With the Flex family, the choices aren't limitless (that would be impossible). But there are a lot of them—iColor Flex LMX gen2 and iColor Flex MX gen2 for white light, iW Flex Compact for tunable white light, and eW Flex Micro for solid white light. Plus a myriad of options and choices. So you have the freedom to choose the exact direct-view luminaire that meets your needs.

Bright Output

We optimize our LED selection (see page 11) for maximum output and consistency, ensuring performance that goes well beyond comparable luminaires. Brighter output lets you take on larger structures and create ambitious designs that get noticed. And our lumen measurement complies with IES LM-79-08 testing procedures for consistency.

Easy Installation

Flex luminaires are exceptionally easy to get up and running, thanks to simple mounting and auto-addressing for every node. So projects proceed smoothly—achieving impressive results in less time, with less complexity.

Proven Reliability

All Flex luminaires are designed to be extremely reliable, year after year—thanks to smart design, extensive testing, and years of experience. Flex luminaires can handle a wide range of extreme conditions, humidity, and temperature shifts—delivering reliable performance.

Complete Solution

Advanced, reliable Flex luminaires are a critical part of your direct-view lighting solution, but it's not the only element that matters. That's why Color Kinetics offers a full range of complementary solutions—including power/data supplies, controllers, and much more. All designed and optimized to ensure seamless integration and years of trouble-free operation.

Find the **Flex luminaire** that meets your needs

The Flex family has grown over time to include many solutions and even more options—all intended to meet the evolving needs of lighting designers. What links all of these offerings is simple—all Flex solutions are flexible strands of addressable LED nodes that feature dynamic integration of power and control. From there, Flex branches out into a range of solutions with specific capabilities designed to meet your needs.*



iColor Flex LMX gen2: Brightest color output for larger installations



iColor Flex LMX gen2 brings you large, high-intensity, full-color LED nodes designed for extraordinary effects and extensive installations. It's the right choice for architectural accent and perimeter lighting, large-scale signage, building-covering video displays, two- and three-dimensional installations, and other ambitious projects. With bright full-color light output of up to 28.7 candela, your installation will be viewable from long distances—as well as daylight-visible for even more impact.

Standard lens options include clear flat, translucent dome, and narrow beam lenses. Optional marquee lenses, available in clear, semi-frosted, and translucent, snap on flat-lens nodes to make them look more like bulbs of a traditional theater marquee. For even more customization, Flex LMX gen2 offers standard and custom strand lengths, node spacings, and leader cable lengths.

* Go to www.colorkinetics.com/Products/Application/Direct-View/ for more information about the Flex Family—including high-performance four-channel FlexElite luminaires, which feature a larger, brighter node.

Photography: James Newton Photography

iColor Flex MX gen2: Bright color output in a flexible form factor



iColor Flex MX gen2 features smaller, high-intensity full-color LED nodes that deliver daylight-visible light output of up to 2.3 candela. This output makes it appropriate

for video displays, two- and three-dimensional installations, large-scale signage, architectural accent and perimeter lighting, and other projects. Daylight visibility means that your design will be visible day and night, an important consideration for video, messaging, and other high-visibility installations.

Standard lens options include clear and translucent dome lenses. Clear flat and translucent flat lens are available as options. iColor Flex LMX gen2, eW Flex Compact, and iW Flex Compact offer standard on-center node spacing of 4 in (102 mm) or 12 in (305 mm) and custom spacing from 3 in (76 mm) to 24 in (610 mm)—supporting virtually any lighting or video design. And iColor Flex MX gen2 and eW Flex Micro support an even shorter 2 in (51 mm) minimum spacing. Standard 50-node strands can be field-shortened, and custom lengths of 1 to 60 nodes are also available.

Color and White Options

Flex luminaires create dots of intense, high-quality dynamic color, or white light, depending on your needs. iColor Flex LMX gen2 and iColor Flex MX gen2 bring exceptional color and dynamic color light via iColor technology. Flex Compact is also available in tuneable IntelliWhite (iW), and Flex Compact and Flex Micro are available in Essential White (eW) models for exceptional white light.



RGB luminaires are the standard RGB option for intensely saturated light.



IntelliWhite luminaires combine channels of warm and cool white LEDs offering a range of color temperatures that are easily adjustable.



Essential White luminaires offer a single channel of white light. Available in 2700 K, 3000 K, 3500 K, 4000 K, 5000 K, 5700 K, and 6500 K.

iW Flex Compact:

High-intensity tunable white LED nodes



iW Flex Compact strands are designed for high-impact effects and large-scale direct-view exterior installations. Each compact node produces tunable white light output of up to 91.6 candela, making iW Flex Compact exceptionally bright, daylight-visible—and suitable for viewing from a distance. And iW Flex Compact nodes contain warm and cool white LEDs, so you can choose the right color temperature—from 2700 K to 6500 K. Since each Flex node is individually controllable, you can control and vary the tone and brightness of iW Flex nodes, creating a wide range of fascinating visual effects. When your application calls for bright, tunable white light, iW Flex Compact is the right choice.

Standard lens options include clear flat, translucent dome, and narrow beam lenses. Optional marquee lenses, available in clear, semi-frosted, and translucent, snap on flat-lens nodes to make them look more like bulbs of a traditional theater marquee. These marquee lenses can be mounted in front of a substrate or directly to mounted strands.

eW Flex Compact:

Solid white light for exterior or interior applications



eW Flex Compact brings you strands of solid white LED nodes that can be installed across any interior or exterior surface, including walls, ceilings, floors, three-dimensional sculptures, set pieces, and more. eW Flex Compact is also a great solution for lighting tight alcove spaces and signage, and even low-resolution video.

With compact nodes that output light up to 89.6 candela (129,758 nits), eW Flex Compact produces bright, daylight-visible light. When your application calls for solid white light, eW Flex Compact is the right choice. Standard lens options include clear flat, translucent dome, and narrow beam lenses. Optional translucent flat, clear dome, narrow beam, semi-frosted flat, and semi-frosted dome lenses are available.

eW Flex Micro:

Solid white light from small but powerful nodes



eW Flex Micro is a versatile strand of 50 small, individually controllable LED nodes that deliver solid white light, outputting up to 10.5 candela and 7529 nits per node. eW Flex Micro can be installed across interior or exterior surfaces, including walls, ceilings, floors, three-dimensional sculptures, set pieces, and more. eW Flex Micro's small size makes it appropriate for lighting tight alcove spaces and signage, and even low-resolution video.

eW Flex Micro strands are available with standard on-center node spacing of 4 in (102 mm) or 12 in (305 mm). Strands can be mounted directly to a surface. Detachable leader cables in multiple lengths allow you to install strings at the appropriate distance from power/data supplies.



Flex integrates advanced technologies from Color Kinetics

Color Kinetics is setting new standards for consistency and accuracy by developing advanced technologies that are integrated into our luminaires, including our Flex family. These technologies work together to deliver ever-escalating levels of quality, performance, and accuracy required for your most innovative and ambitious projects.

Optibin—our LED optimization technology—begins the color consistency process by grouping (or binning) LEDs by flux as well as center wavelength. This proprietary binning optimization process uses

an advanced bin selection formula that exceeds industry standards for chromaticity to guarantee uniformity and consistency of hue and color temperature for all our luminaires. **Integrated into all Flex luminaires.**

Chromatic—our custom-designed microchip—integrates power, communications, and control to enable next-generation LED lighting systems and networks. Chromatic combines digital LED control and communication technology in a tiny package, enabling highly controllable LED nodes to generate 68 billion color combinations. Chromatic technology creates whole new possibilities for small-scale installations comprising a few light nodes to large-scale installations with hundreds of thousands of individual light nodes—each equipped with the intelligence to be automatically addressed and controlled. **Integrated into all Flex luminaires.**

To find out how innovative technologies within our advanced luminaires can help you do more visit www.colorkinetics.com/Learn.

See what makes **Flex** so flexible—and reliable.

Standard and Custom Spacing and Length.

Flex lets you choose the node spacing and strand length that works best for your implementation.

Standard Flex Strand Length.

Consisting of 50 individually addressable LED nodes with 102 mm (4 in) or 305 mm (12 in) on-center node spacing in white or black housings.

Easy to Shorten.

All Flex node strands can be field-shortened.

Outdoor-Rated.

All Flex nodes are sealed for maximum node life and weather-resistance—and IP66-rated for outdoor applications.

Simplified Mounting.


Flex nodes can be mounted directly on a surface or substrate, arranged as needed—in uneven node spacings and complex geometries, or optional mounting tracks to ensure straight linear runs.

Standard and Optional Lenses.

Each Flex solution offers a range of standard lens options, as well as optional lenses—ensuring that your implementation looks fantastic, up close and from a distance.

Optimized Nodes.

Choose the node that outputs the light (white, tunable white, or color) and brightness that match your specific needs

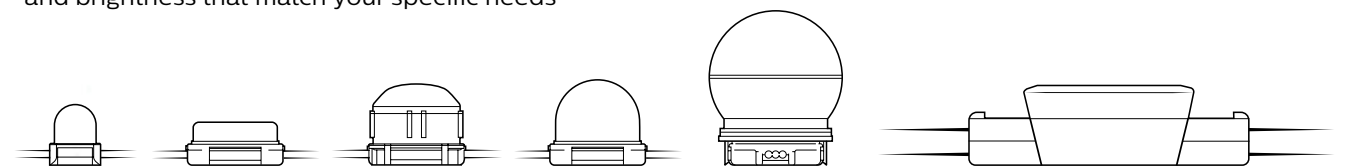

Flex MX gen2 Flex Micro
105° clear dome lens or 165° translucent dome lens

Flex LMX gen2 Flex Compact
105° clear flat lens

Flex LMX gen2 Flex Compact
36° narrow beam lens

Flex LMX gen2 Flex Compact
165°–200° translucent dome lens

Flex LMX gen2 Flex Compact
Optional marquee lens available in clear, semi-frosted, and translucent

Compatible with clear flat lens versions of Flex LMX gen2 and Flex Compact.

FlexElite
120° 2.4 in (60 mm) diameter node features a clear flat glass lens in a sturdy aluminum housing. As much as 5x brighter than Flex LMX gen2. Available in IntelliHue, RGBW, RGBA.

www.colorkinetics.com/FlexElite for more information.

Exceptional lighting

takes more than a luminaire

To unlock the full potential of your Flex luminaires, you need the right components to power and control it. Color Kinetics completes your solution with:

Controllers

Our broad line of controllers brings you differing capabilities that match your specific needs, the complexity of your project, and your budget. Our controllers offer the industry-standard DMX protocol, or our proprietary, scalable KiNET protocol for Ethernet networks. Because of addressing limitations, DMX is appropriate for relatively simple installations, or for light shows in which multiple Flex nodes operate in unison. Because it is not subject to DMX addressing limitations, Ethernet is the preferred environment for intricate color-changing light shows using iColor Flex LMX gen2 or iColor Flex MX gen2. All Flex solutions work seamlessly with our full range of controllers, including Light System Manager, Video System Manager Pro, iPlayer 3, Antumbra iColor Keypad, and ColorDial Pro, as well as third-party DMX controllers.


Monitoring and Management

ActiveSite is the first-ever cloud-hosted connected lighting system for architectural LED lighting installations. ActiveSite allows you to remotely monitor, manage, and maintain an installation site from anywhere in the world, using a secure web connection.

World-class Flex luminaires

Power/Data Supplies

We pair each Flex luminaire with the right data/power supply, delivering the power and data needed for your project, ensuring exceptional operation, and maximizing run lengths.

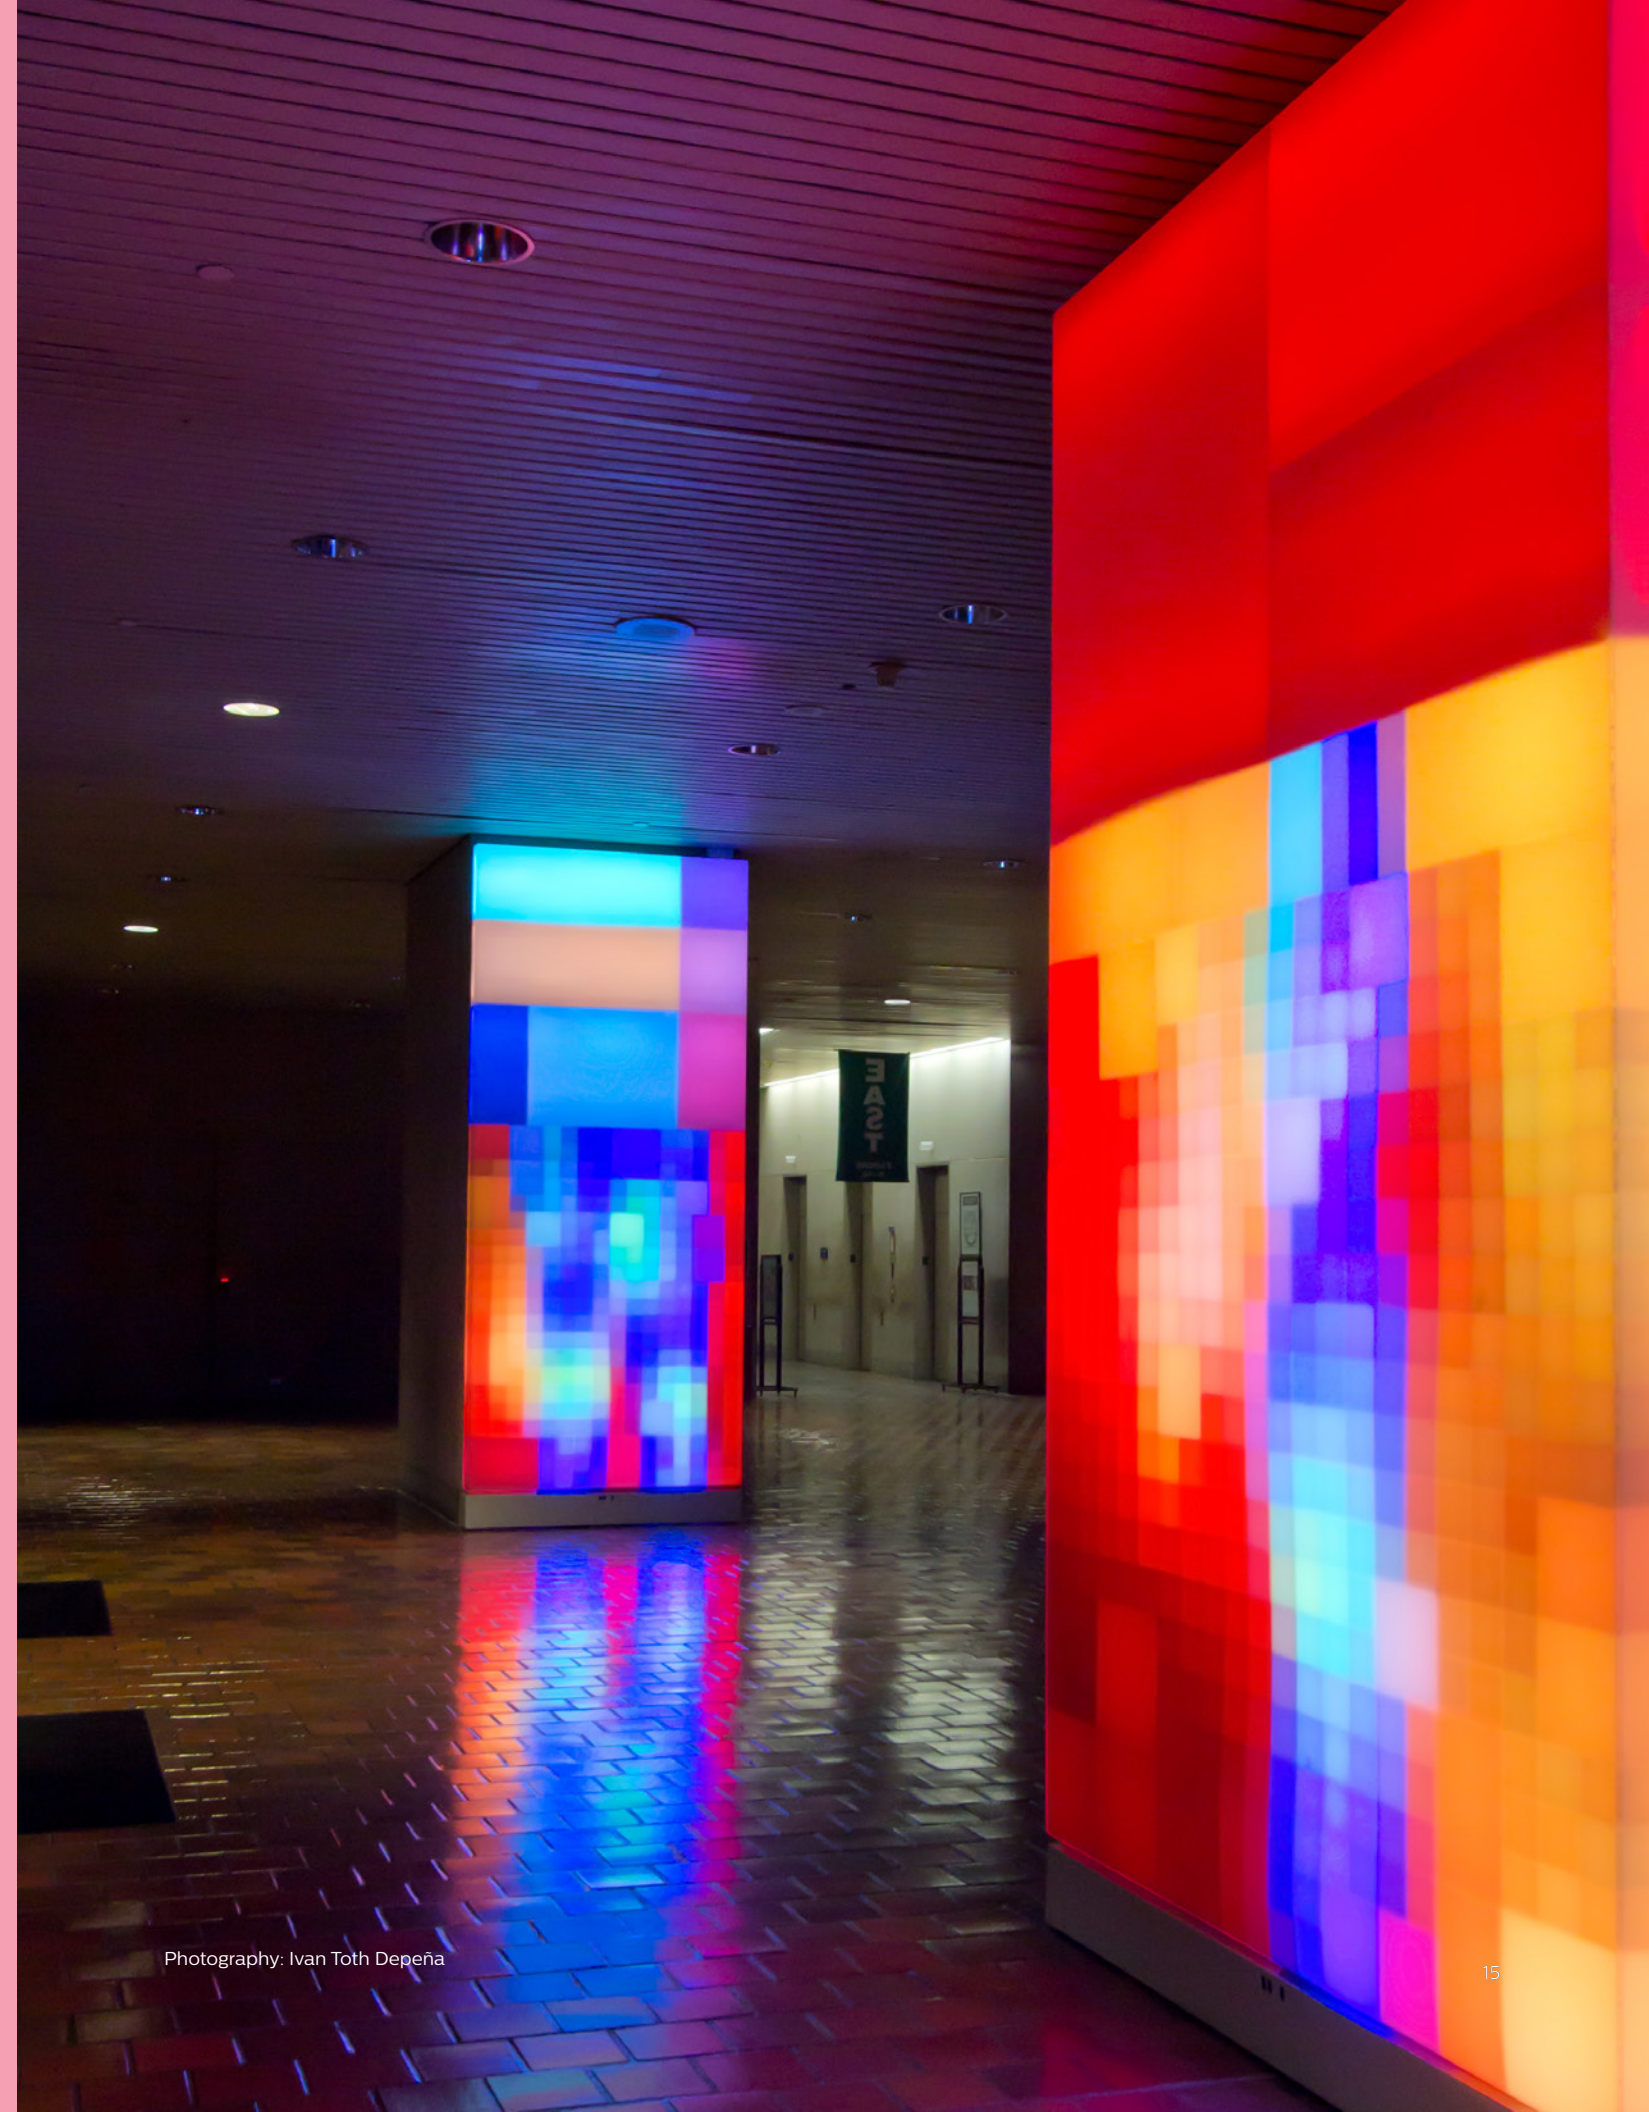

Photography: Ivan Toth Depeña

Flex Showcase

Example 1 Immerse yourself in digital art at the city by the bay

Considered the largest LED lighting sculpture in the world, The Bay Lights is a popular and permanent part of the San Francisco Bay area. This living sculpture uses 25,000 nodes of Color Kinetics eW Flex Compact, selected because of its ability to withstand harsh weather. The installation also incorporates ActiveSite, our cloud-based connected lighting platform, which enables more efficient management of the iconic landmark—including remote diagnostics, reporting, data analytics, and control.



Photography: Lucas Saugen

Product

eW Flex Compact

Example 2 Eye-popping light transforms a Warsaw landmark

Color Kinetics illuminates the second tallest skyscraper in Poland with more than 80,000 individually controllable iColor Flex LMX gen 2 light points. This 220 m (722 ft) skyscraper, located in the heart of Warsaw's business district, is the largest installation of Color Kinetics technology in Central Eastern Europe. Dynamic content displayed on the Flex installations—including images and messages—is visible within a radius of several kilometers throughout Warsaw.



Photography: Signify Lighting Poland

Product

iColor Flex LMX gen2

Details

80,000 nodes used to create two screens 71 m (233 ft) by 39 m (128 ft).

Flex Showcase

Example 3 Moscow mall mirrors Times Square billboards

This massive shopping mall and entertainment complex features an imaginative lighting project the first and largest of its kind in Russia. iColor Flex LMX gen 2 nodes are mounted on VEGAS Crocus City's ventilated façade—transforming its media façade into a vibrant, full-colored spectacle. Managed from a single location, the façade can be programmed with text, images, and color effects for decorative, entertainment, or commercial purposes.




Photography: Gleb Igrunov

Product

iColor Flex LMX gen2

Example 4 Crystal glasses shine in hotel lobby

The lobby of Baccarat's opulent, 50-story flagship hotel features an innovative lighting installation that integrates 1,824 of Baccarat's famous Harcourt crystal glasses and 40 strands of iColor Flex LMX gen2 nodes. This wall shimmers with dynamic color and shifting background images that reflect the mood of the hotel and time of day—from geometric shapes to candlelight. It also displays periodic animations that surprise and delight hotel guests.

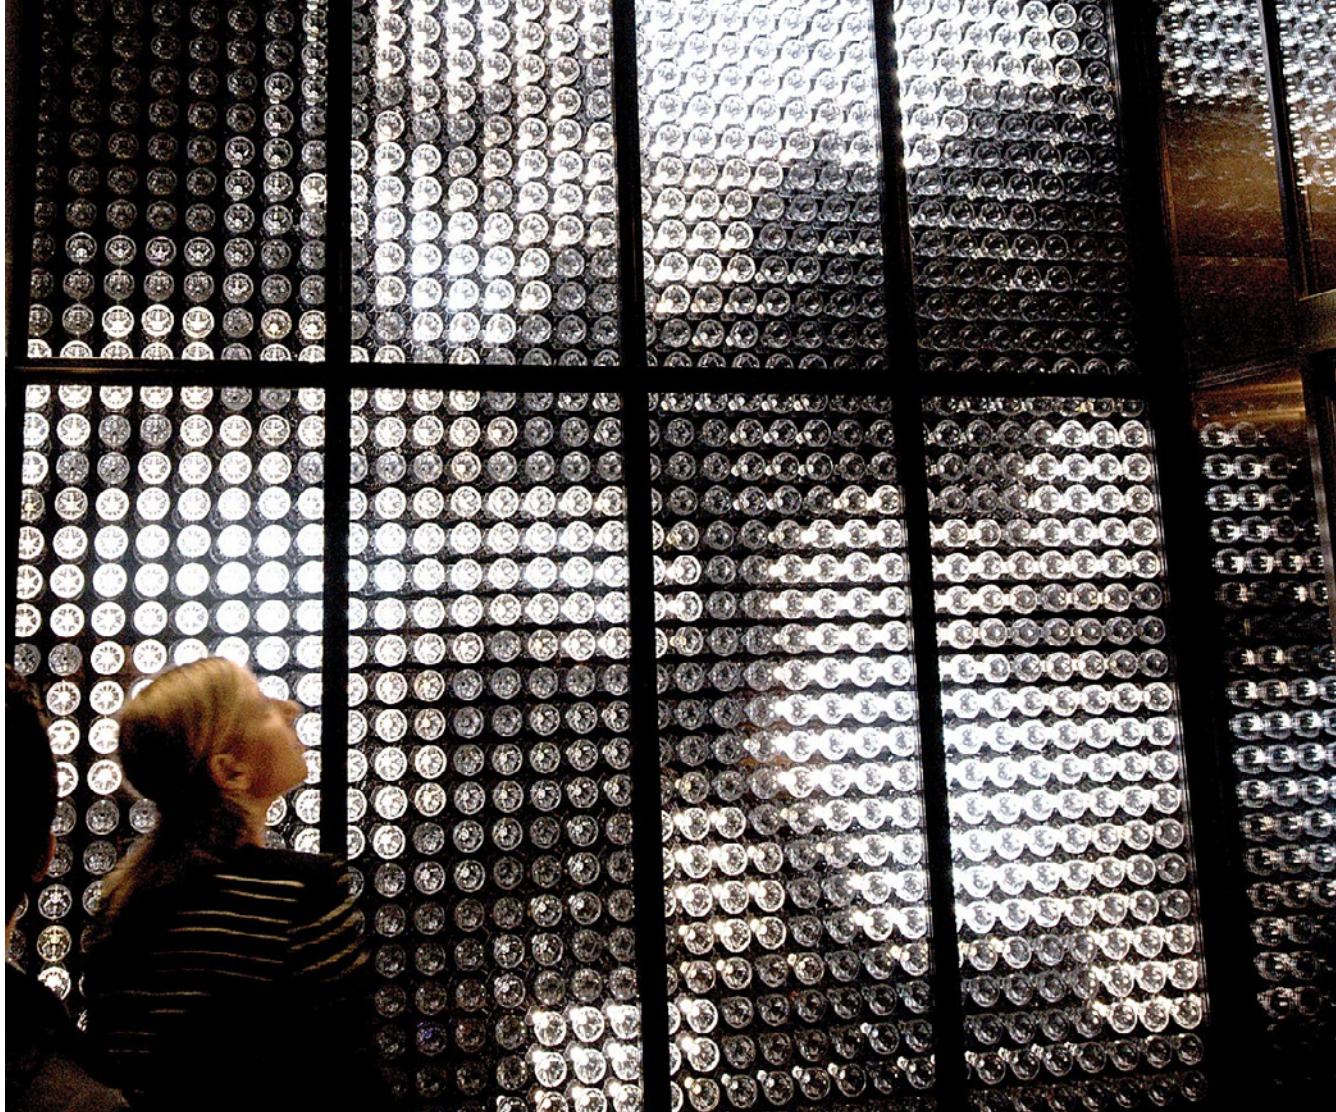

Photography: Hyersonic and Sosolimited

Product

iColor Flex LMX gen2

Details

1,824 Harcourt glasses are beautifully illuminated by 900 plus nodes of iColor Flex LMX gen2

Flex Showcase

Example 5 Standing tall in the Bogota skyline

Flex transforms the four sides of the tallest building in Colombia into a massive video matrix—making the structure come alive in the night sky. Mounting tracks secure 812 50-node iColor Flex LMX strands to the building's façade, creating high-intensity color effects that set Torre Colpatría ablaze with pulsating light at night. The Flex implementation also displays full video—from dancing silhouettes to spinning sunflowers to New Year's Eve countdowns.



Photography: Steven King fotografo

Product	Details
iColor Flex LMX	40,000 plus nodes on all four sides of this skyscraper

Example 6 College faces become large-scale art

When students pass through a central atrium at Gateway Community College, they see slowly shifting photos of their classmates, professors, and administrators on a 9 x 9 m (30 x 30 ft) LED wall. Strands of iColor Flex LMX full-color LED nodes enable this innovative, eye-catching wall to display College Faces, a slow-motion collection of photos (including some from smartphones) that changes every thirty seconds.



Photography: Electroland

Product	Details
iColor Flex LMX	9 m (30 ft) by 9 m (30 ft) screen with iColor Flex LMX spaced 4 inches on center

Specifications and information

		Lumens per node	Efficacy lm/w	CRI	Power per node
iColor Flex LMX gen2		13 to 30	13 to 30	—	1 W
iW Flex Compact	2700 K to 6500 K	28 to 80	29.2 to 79.4	86.4 to 91	1 W
eW Flex Compact	2700 K	35 to 81	35 to 81	82 to 85	1 W
<i>(Also available in 3000 K and 3500 K, 4000 K, 5000 K, 5700 K, 6500 K)</i>	4000 K	40 to 87	40 to 87	84 to 86	1 W
iColor Flex MX gen2		4 to 6	8 to 12	—	0.5 W
eW Flex Micro	2700 K	17.5 to 25.7	35 to 51	84 to 86	0.5 W
<i>(Also available in 3000 K, 3500 K, 4000 K, 5000 K, 5700 K, 6000 K)</i>	4000 K	18.2 to 27.8	36 to 56	86 to 89	0.5 W


General Information

Viewing Angle	iColor Flex MX gen2 and eW Flex Micro - 105°, 165° iColor Flex LMX gen2 and iW Flex Compact - 36°, 105°, 165° eW Flex Compact - 36°, 105°, 200°
LED Channels	iColor Flex MX gen2, iColor Flex LMX gen2 - Red/Green/Blue iW Flex Compact - 2700 K and 6500 K eW Flex Compact - 2700 K, 3000 K, 3500 K, 4000 K eW Flex Micro - 2700 K, 3000 K, 3500 K, 4000 K, 5000 K, 5700 K
Input Voltage	iColor Flex MX gen2 - 7.5 VDC via sPDS-480ca, and PDS-60ca All others - 24 VDC via PDS-60ca 24V, sPDS-60ca 24V, sPDS-480ca 24V, or CM-150 CA 24V
Housing Material	Polycarbonate
Lens	Clear or Translucent UV-protected polycarbonate
Approbations	UL/cUL, FCC Class A, CE
Environment	Dry/Damp/Wet Location, IP66


	iColor Flex LMX gen2, iW and eW Flex Compact	iColor Flex MX gen2, eW Flex Micro
Weight (50 node strand)	1.5 kg (3.3 lb) 4 inch spacing 1.74 kg (3.8 lb) 12 inch spacing	970 g (2.1 lb) 4 inch spacing 1.48 kg (3.3 lb) 12 inch spacing
Node Dimensions		
Dome Lens	31 x 32 x 28 mm (1.2 x 1.3 x 1.1 in)	19 x 16 x 16 mm (0.75 x 0.63 x 0.63 in)
Narrow Beam Lens	31 x 32 x 27 mm (1.2 x 1.3 x 1.1 in)	—
Flat Lens	31 x 32 x 17 mm (1.2 x 1.3 x 0.7 in)	—

For further information


Complete details including Installation Instructions, Specification Sheets, .ies files, and product drawings can be found on the product page.




[iColor Flex LMX gen2](#)



[iW Flex Compact](#)



[eW Flex Compact](#)



[iColor Flex MX gen2](#)



[eW Flex Micro](#)



Additionally, we can engineer unique solutions to exactly fit your specific lighting project needs.

If you don't see what you need, a wide range of custom configurations are available. See the Custom Configuration Specification Sheet on the respective product page for more information.

Configuration and planning

Regardless of the size and complexity of your installation, the planning time you spend up front can help streamline the installation and configuration of your luminaires. Keep these points in mind as you plan your installation:

Which Power/Data Supplies are right for your luminaires? [Download the Power/Data Supplies Compatibility table.](#)

Want to display video on your structure? You may be a lighting designer who wants to tap the power of video, a municipality that wants to turn a landmark into an icon, or a building owner/manager who wants to draw attention to your office tower, stadium, casino, or other structure. Before you dive into video, there are some initial questions you need to ask yourself, key elements you'll need to create a complete solution, and some specific technical considerations that you need to address by downloading [Color Kinetics Video Guideline](#).

Configuration Calculator Create a lighting design plan that identifies and locates all luminaires, Data Enabler Pro devices, and controllers. Use [Configuration Calculator](#) to determine how many luminaires you can install in a single run, and the


maximum distances between Data Enabler Pro devices, luminaires, and controllers.

QuickPlay Pro Flex luminaires operate in 8-bit mode by default. To address luminaires, including switching between 8-bit mode and 16-bit mode download [QuickPlay Pro](#).

Additional considerations Determine whether to address luminaires and configure your lighting system offline or interactively. With offline configuration, you stage and configure your system off-site, prior to installation. Offline configuration can be convenient when luminaires are to be installed in multiple locations or locations with difficult access. Interactive configuration is typically performed by an experienced technician, after luminaires have been installed. The interactive method can save time, since you only connect and test your luminaires once.

Dimensions

iColor Flex LMX gen2, iW Flex Compact and eW Flex Compact

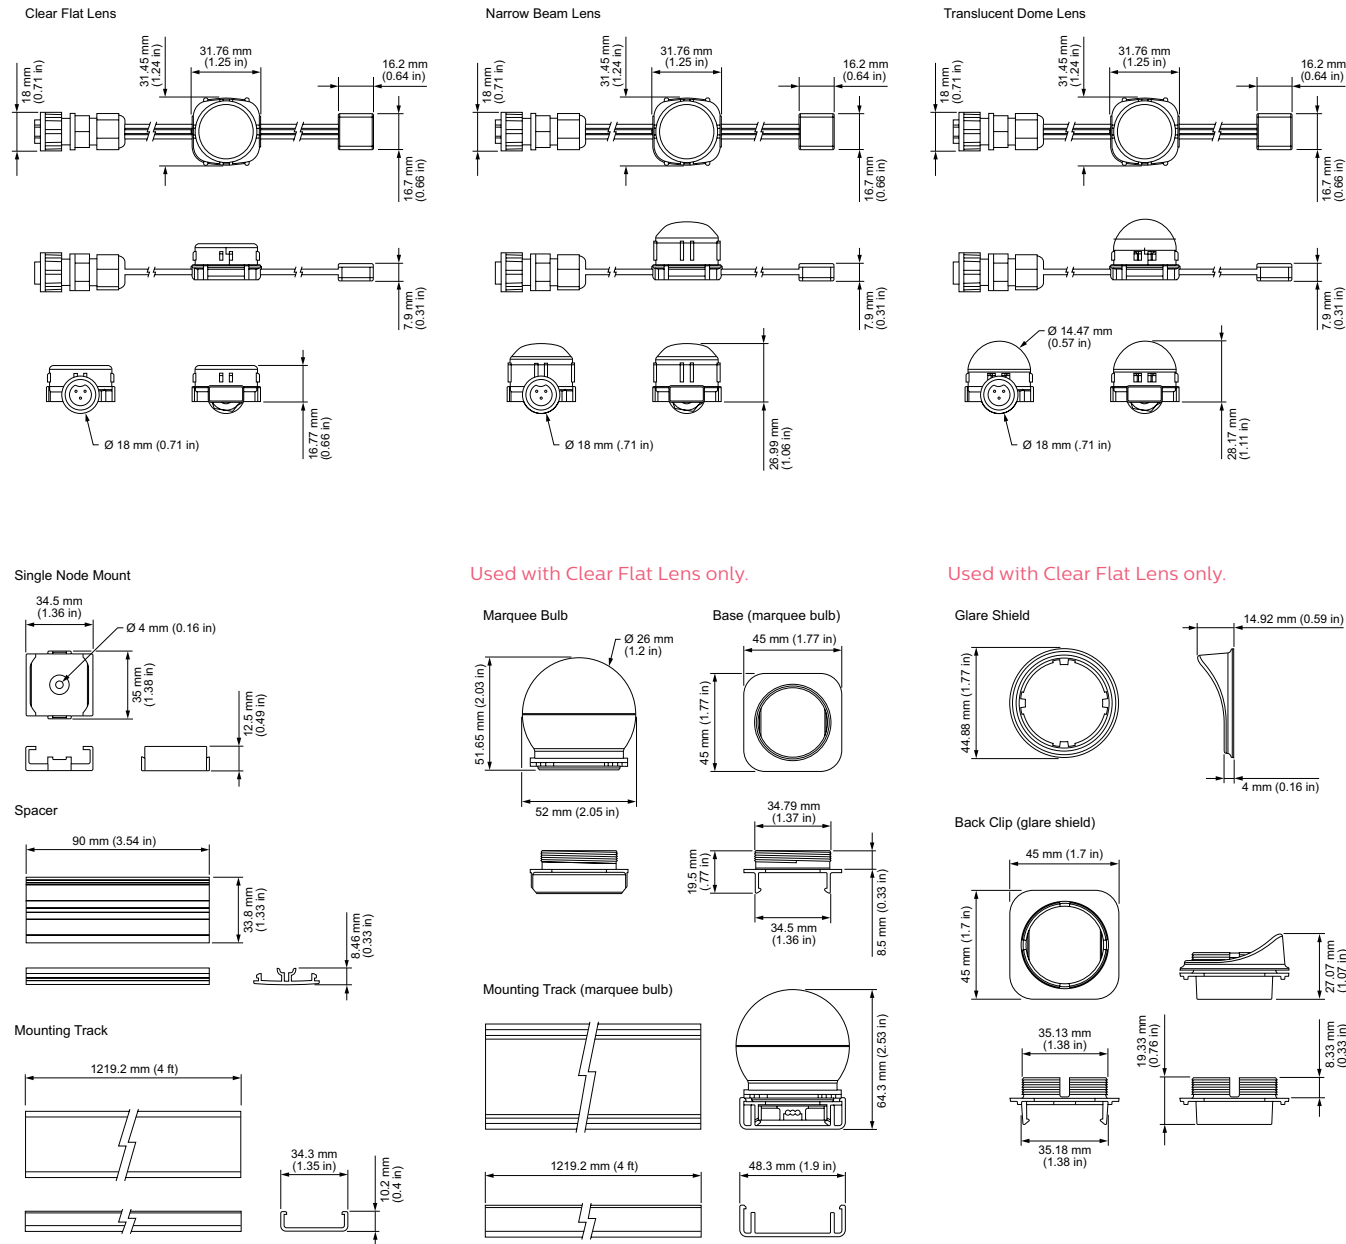

Used with Clear Flat Lens only.

Used with Clear Flat Lens only.


Accessories

Accessory options let you customize iColor Flex LMX gen2, iW Flex Compact and eW Flex Compact.

	Item Number	Signify 12NC
Leader Cable, 15.2 m (50 ft), Black	108-000045-01	910503700697
Leader Cable, 30.5 m (100 ft), Black	108-000045-02	910503700698
Leader Cable, 7.6 m (25 ft), Black	108-000045-00	910503700696
Glare Shield Kits, Qty 50, Black	120-000179-00	912400130036
Marquee Lens Kits, Qty 50, Clear, Black	999-007997-01	910503702309
Marquee Lens Kits, Qty 50, Clear, White	999-007997-00	910503702308
Marquee Lens Kits, Qty 50, Semi-Frosted, Black	999-007997-05	910503702313
Marquee Lens Kits, Qty 50, Translucent, Black	999-007997-03	910503702311
Marquee Lens Kits, Qty 50, Translucent, White	999-007997-02	910503702310
Marquee/Accessory Mounting Track, 1.2 m (4 ft), Black	101-000057-04	910503704267
Marquee/Accessory Mounting Track, 1.2 m (4 ft), White	101-000057-03	910503704266
Marquee/Accessory Spacers, Qty 50, 102 mm (4 in), Black	101-000075-02	910503704274
Marquee/Accessory Spacers, Qty 50, 102 mm (4 in), White	101-000075-00	910503704272
Marquee/Accessory Spacers, Qty 50, 305 mm (12 in), Black	101-000075-03	910503704275
Marquee/Accessory Spacers, Qty 50, 305 mm (12 in), White	101-000075-01	910503704273
Mounting Track, 1.2 m (4 ft), Black	101-000057-01	910503700045
Mounting Track, 1.2 m (4 ft), White	101-000057-00	910503700044
Single-Node Mounts, Qty 50, Black	101-000058-01	910503700047
Single-Node Mounts, Qty 50, White	101-000058-00	910503700046
Spacers, Qty 50, 102 mm (4 in), Black	101-000061-00	910503700052
Spacers, Qty 50, 102 mm (4 in), White	101-000059-00	910503700048
Spacers, Qty 50, 305 mm (12 in), Black	101-000061-01	910503700053
Spacers, Qty 50, 305 mm (12 in), White	101-000059-01	910503700049
Power Supplies		
PDS-60ca 24V, Power/Data Supply, Pre-programmed	109-000016-00	910503700095
PDS-60ca 24V Power/Data Supply, DMX/Ethernet	109-000016-04	912400133526
sPDS-60ca 24V Power/Data Supply, DMX/Ethernet (NA Power Cord)	109-000021-04	912400133527
sPDS-60ca 24V Power/Data Supply, DMX/Ethernet (EU/CE Power Cord)	109-000021-05	912400133636
sPDS-480ca 24V Power/Data Supply, Ethernet	109-000026-01	912400133528
CM-150 CA, DIN Rail Mount, Four-Wire Terminal, 24V	109-000033-00	912400135766
CM-150 CA, DIN Rail Mount, Three-Wire Terminal, 24V	109-000033-02	912400135768
CM-150 CA, Surface Mount (IP66), Four-Wire Terminal, 24V	109-000034-00	912400135770
CM-150 CA, Surface Mount (IP66), Three-Wire Terminal, 24V	109-000034-02	912400135772

Dimensions

iColor Flex MX gen2 and eW Flex Micro

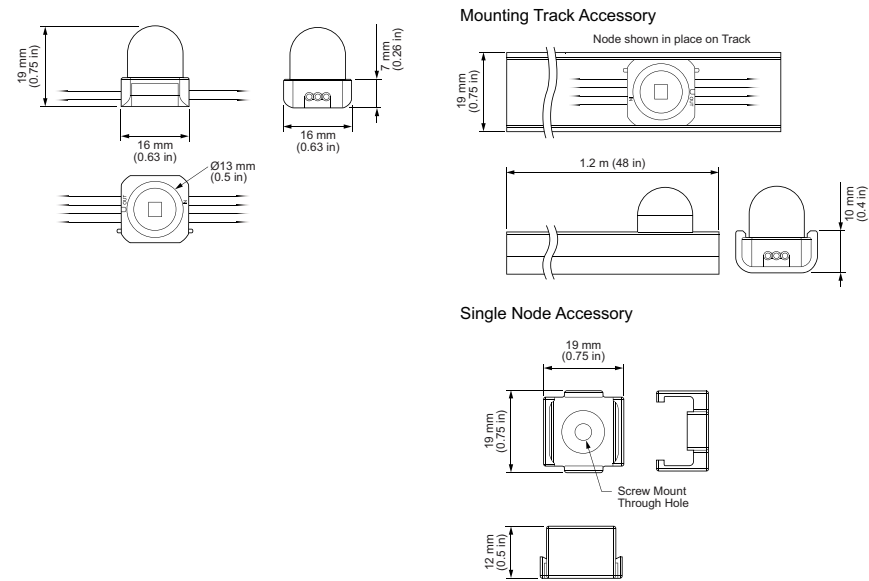

Accessories

Accessory options let you customize iColor Flex MX gen2 and eW Flex Micro.

	Item Number	Signify 12NC
Leader Cable, 15.2 m (50 ft), Black	108-000045-01	910503700697
Leader Cable, 30.5 m (100 ft), Black	108-000045-02	910503700698
Leader Cable, 7.6 m (25 ft), Black	108-000045-00	910503700696
Mounting Track, 1.2 m (4 ft), Black	101-000024-01	910503700016
Mounting Track, 1.2 m (4 ft), White	101-000024-00	910503700015
Single-Node Mounts, Quantity 50, Black	101-000039-01	910503700026
Single-Node Mounts, 50 mounts, White	101-000039-00	910503700025
Spacers, Qty 50, 305 mm (4 in), Black	101-000047-01	910503700031
Spacers, Qty 50, 102 mm (4 in), White	101-000047-00	910503700030
Spacers, Qty 50, 305 mm (12 in), Black	101-000048-01	910503700033
Spacers, Qty 50, 305 mm (12 in), White	101-000048-00	910503700032
Power Supplies		
PDS-60ca 7.5v, Pre-programmed	109-000015-00	910503700093
PDS-60ca 7.5v, DMX/Ethernet	109-000015-03	910503700094
PDS-60ca 24V, Power/Data Supply, Pre-programmed	109-000016-00	910503700095
PDS-60ca 24V Power/Data Supply, DMX/Ethernet	109-000016-04	912400133526
sPDS-60ca 24V Power/Data Supply, DMX/Ethernet (NA Power Cord)	109-000021-04	912400133527
sPDS-60ca 24V Power/Data Supply, DMX/Ethernet (EU/CE Power Cord)	109-000021-05	912400133636
sPDS-480ca 7.5v, Ethernet	109-000022-00	910503700107
sPDS-480ca 24V Power/Data Supply, Ethernet	109-000026-01	912400133528
CM-150 CA, DIN Rail Mount, Four-Wire Terminal, 24V	109-000033-00	912400135766
CM-150 CA, DIN Rail Mount, Three-Wire Terminal, 24V	109-000033-02	912400135768
CM-150 CA, Surface Mount (IP66), Four-Wire Terminal, 24V	109-000034-00	912400135770
CM-150 CA, Surface Mount (IP66), Three-Wire Terminal, 24V	109-000034-02	912400135772

© 2019 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

All trademarks are owned by Signify Holding or their respective owners.
DAS-000248-00 R01 01-19

