






**PREMIER
PAVERS**
*Distinctive Driveways
and Patios*




**PREMIER
PAVERS**
*Distinctive Driveways
and Patios*




**PREMIER
BRICK**
*Architectural
Stone Cladding*





**PREMIER
PAVERS**
*Distinctive Driveways
and Patios*




**PREMIER
SCHIST**
*Timeless Style
and Beauty*




**PREMIER
BLOCK**
*Superior Retainer
Walls*

050723



PREMIER™
GROUP NEW ZEALAND
Beautify your world
NZ OWNED & OPERATED

**PRODUCTS
CATALOGUE**

0800 22 22 98
PREMIER-GROUP.NZ

CONTENTS

PREMIER BRICKS	3
LIFESTYLE RANGE DRIVEWAY PAVERS	10
LIFESTYLE RANGE PATIO PAVERS	14
ITALIA RANGE PATIO PAVERS	18
ITALIA RANGE BULLNOSE PAVERS	28
RETAINING WALLS	30
SCHIST STONE	32
ADDITIONAL PRODUCTS	37
ADDITIONAL PRODUCTS CALCULATORS	39
HOW TO CHOOSE YOUR PAVERS	40
YOUR GUIDE TO THE DESIGN	41
HOT TO LAY YOUR LIFESTYLE RANGE PAVERS	42
HOW TO INSTALL YOUR GARDEN WALL	43
HOW TO LAY YOUR ITALIA RANGE PATIO PAVERS	44
WARRANTY FORM	45
GENERAL INFORMATION	46

THANK YOU! FOR CHOOSING PREMIER PRODUCTS!


At Premier Group, we are dedicated to making your product selection process a very happy & enjoyable experience! From our top quality & timeless products, to our lovely team of people, we are sure that you will be absolutely delighted with your choice!

Thanks again!
From the team at
Premier Group New Zealand





Country | Straight Edge | Premier White

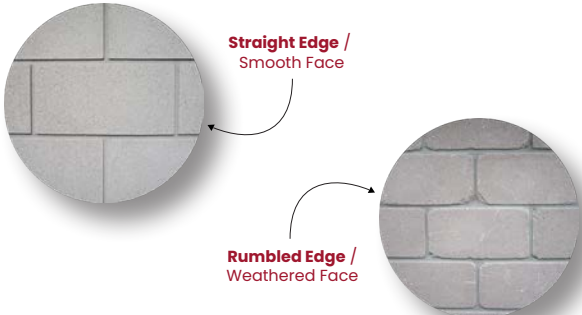

Country, 290W x 145H x 70D

Brick Specs

Units per m ²	22
m ² per pallet	10.2
units per pallet	224

Available in either Straight Edge or Rumbled Edge.

Designer Colours



SPECIAL COLOURS FOR COUNTRY BRICK ONLY
Allow 6-8 weeks lead time depending on season.



DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



4 PREMIER BRICK



Estate | Straight Edge | Premier White



Modena, 290W x 90H x 70D

Brick Specs

Units per m ²	33
m ² per pallet	11.6
units per pallet	384

Available in either Straight Edge or Rumbled Edge.

Designer Colours

Allow 4-6 weeks lead time depending on season.



Estate, 542W x 130H x 70D

Brick Specs

Units per m ²	13
m ² per pallet	9.7
units per pallet	126

Available in Straight Edge ONLY.

Designer Colours

Allow 6-8 weeks lead time depending on season.





Mansion | Straight Edge | Premier White



Mansion, 542W x 270H x 70D

Brick Specs

Units per m ²	7
m ² per pallet	9.1
units per pallet	64

Available in Straight Edge ONLY.

Designer Colours

Allow 6-8 weeks lead time depending on season.




Mansion | Straight Edge | Premier White


DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



The All New Chateau Brick . An Architectural Veneer / Cladding Stone Like No Other!

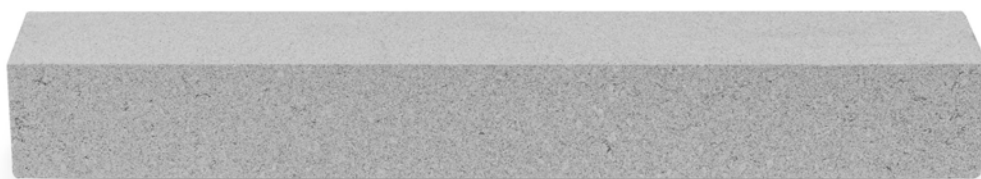


542x70x70 mm




Premier White



Soap Stone






Ash



Iron Stone

The Chateau brick is a new addition to the 542mm Premier series, featuring a sleek design, lighter weight, and high strength. Its fine sandstone texture offers a unique style for contemporary designs, emphasizing horizontal aspects of a building. It's perfect for creating striking facades.





Modena | Straight Edge | Premier White



Estate | Straight Edge | Premier White



Estate | Straight Edge | Premier White



Estate | Straight Edge | Premier White



Mansion | Straight Edge | Premier White



Mansion | Straight Edge | Premier White

DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.





Country | Straight Edge | Ash



Country | Straight Edge | Premier White



Country | Straight Edge | Premier White



Country | Straight Edge | Ash



Estate & Mansion | Straight Edge | Premier White



Estate & Mansion | Straight Edge | Premier White



Mansion | Straight Edge | Premier White



Mansion | Straight Edge | Premier White



Modena | Straight Edge | Iron Stone



Modena | Straight Edge | Iron Stone



Modena | Straight Edge | Premier White



Modena | Straight Edge | Premier White


DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.





Courtyard | 60mm | Iron Sand

Unipave | 60mm | Ash

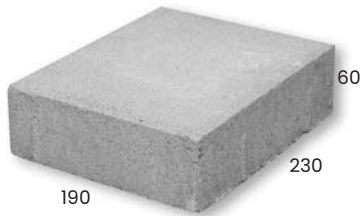


Regency 230 x 190 MM

Paver Specs

Units per m ²	23
m ² per pallet	10.4
units per pallet	240

Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.
50% deposit required at time of order for non stocked items.

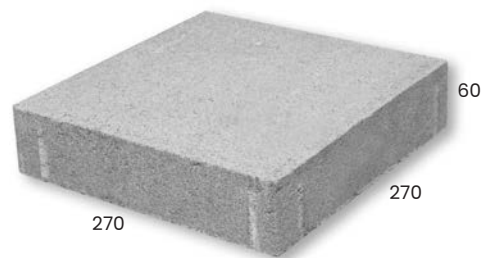

Courtyard 270 x 270 MM

Paver Specs

Units per m ²	14
m ² per pallet	10.28
units per pallet	144


Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.
50% deposit required at time of order for non stocked items.





Unipave | 60mm | Iron Stone & Ash



Unipave 230 x 115 MM

Paver Specs

Units per m ²	38
m ² per pallet	10.52
units per pallet	400

Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.

50% deposit required at time of order for non stocked items.



Matakana

Paver Specs

Units per m ²	19
m ² per pallet	10.1
units per pallet	192

Designer Colours


Allow 4-6 weeks lead time, MOQ is 5 full pallets.

50% deposit required at time of order for non stocked items.




THE WHITE & SOAPSTONE COLOURS CANNOT BE USED FOR THE "BODY" OF THE DRIVEWAY BUT CAN BE USED FOR BORDERS & INLAYS ETC. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



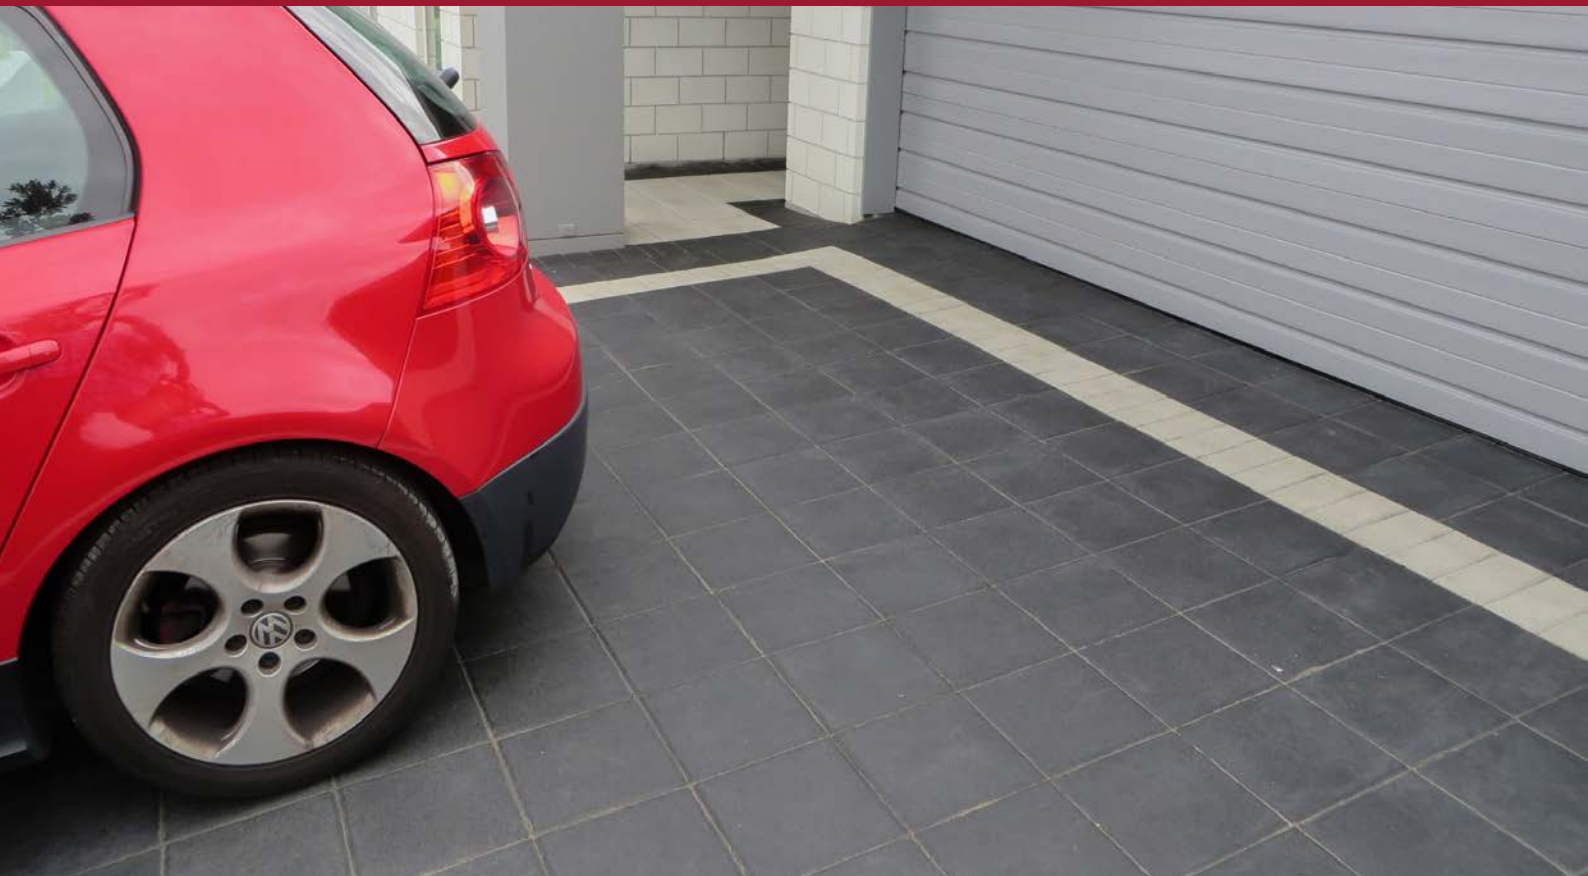

Courtyard | 60mm | Black Magic

Unipave | 60mm | Premier White



Aquaflow Paver (Permeable System)

Paver Specs

Units per m ²	47
m ² per pallet	10.6
units per pallet	500

Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.
50% deposit required at time of order for non stocked items.



Unipave | 60mm | Iron Sand & Tuscany



Aquaflow Paver | 60mm | Ash



Courtyard | 60mm | Iron Sand Unipave | 60mm | Ash



Regency | 60mm | Iron Sand



Courtyard | 60mm | Iron Sand Unipave | 60mm | Ash



Courtyard | 60mm | Black Magic



Unipave | 60mm | Iron Sand & Ash

THE WHITE & SOAPSTONE COLOURS CANNOT BE USED FOR THE "BODY" OF THE DRIVEWAY BUT CAN BE USED FOR BORDERS & INLAYS ETC. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



Patio | 40mm | Premier White



Flagstone 400 x 400 x 40 MM

Paver Specs

Units per m ²	6.25
m ² per pallet	14.4
units per pallet	90

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.
50% deposit required at time of order for non stocked items.



Patio 542 x 270 x 40 MM

Paver Specs

Units per m ²	7
m ² per pallet	14.8
units per pallet	104

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.
50% deposit required at time of order for non stocked items.





Patio | 40mm | Premier White Unipave | 40mm | Black Magic



Courtyard 270 x 270 x 40 MM

Paver Specs

Units per m ²	14
m ² per pallet	14.9
units per pallet	208

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.
50% deposit required at time of order for non stocked items.



Regency 230 x 190 x 40 MM

Paver Specs


Units per m ²	23
m ² per pallet	15.7
units per pallet	360

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.
50% deposit required at time of order for non stocked items.



DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.

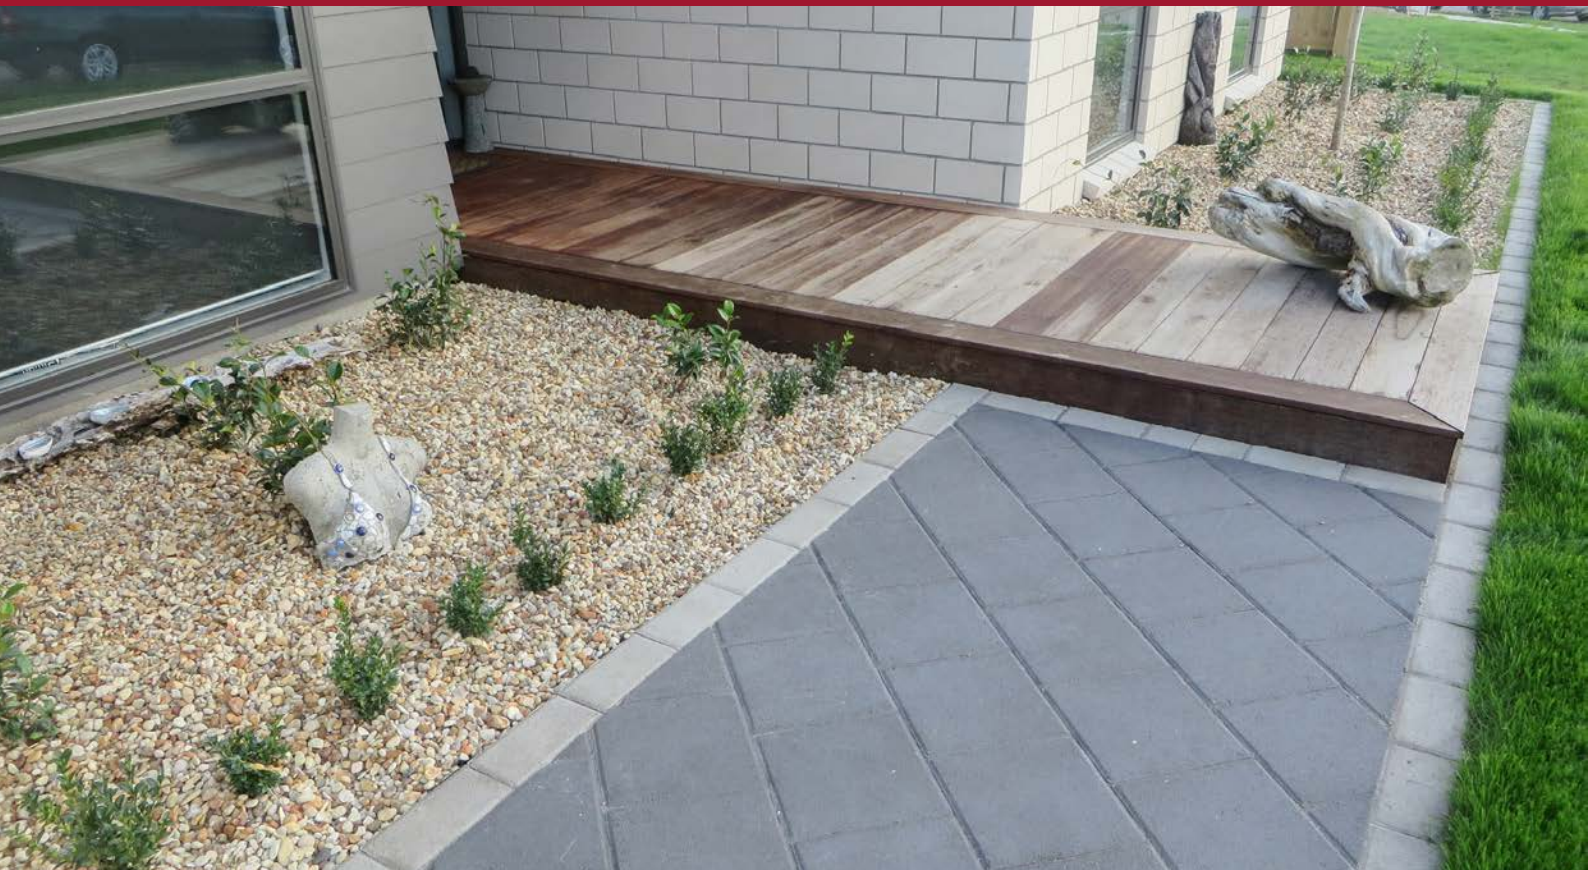

Courtyard | 40mm | Iron Sand Unipave | 40mm | Ash



Unipave 230 x 115 x 40 MM

Paver Specs

Units per m ²	38
m ² per pallet	15.8
units per pallet	600

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.
50% deposit required at time of order for non stocked items.



Patio | 40mm | Ash



Courtyard | 40mm | Ash Unipave | 40mm | Iron Stone



Beauty your world...

Finally, an attractive & practical permeable surface solution that is easy to install & maintain.


It is time to say goodbye to ugly & impractical permeable surfaces.

Permeable pavers are a zero-fines, permeable paving unit. They lock together in the same fashion as typical block paving.

Rainwater passes through the paving units themselves without the need for oversized spacers between paving units and avoiding issues like ants and weeds, etc.

Supplied in 40, 60 and 80mm thick with a compressive strength of over 30 MPa, they are suitable for both light and heavy traffic loads.


Permeable pavers have a permeability rate of over 1900mm/hr making them suitable for even the most extreme levels of rainfall.

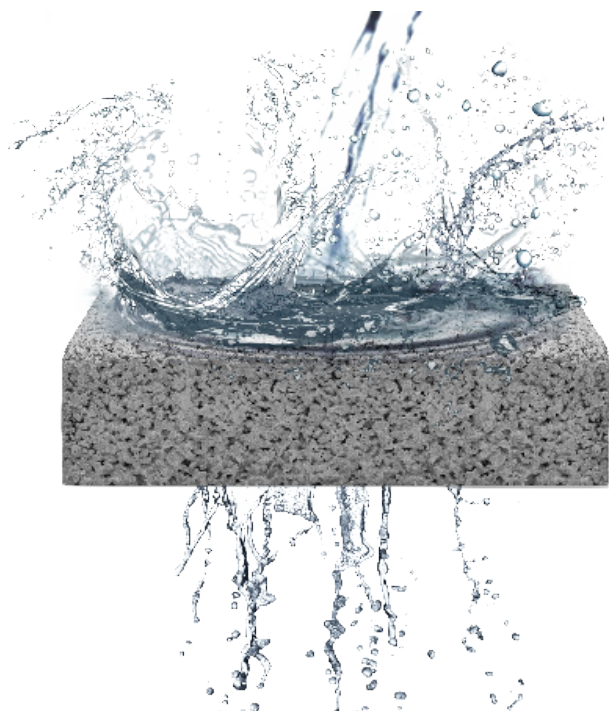

Here are the benefits for you:

- ✓ Highest water flow through rate. 1900 ml per m², per hour.
- ✓ Easy to install.
- ✓ No more ugly grout gaps & unsightly weed issues.
- ✓ Consistent texture & colour.
- ✓ Very low maintenance.
- ✓ 2 designer colours, 3 designer sizes.
- ✓ Approved installers available.
- ✓ Made in NZ by great Kiwis, for great Kiwis.
- ✓ Can be installed in almost any weather. Reduce project delays.

Available in 2 Designer Colours



Ash



Black Magic




Available in 3 Designer Sizes




Monsoon 230x115x60 mm
(For Driveways)

38 pavers per m²



Monsoon 230x115x80 mm
(For Commercial)

38 pavers per m²

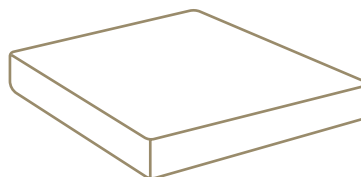


Torrent 400x400x40 mm
(For Patio & Paths)

6.25 pavers per m²



Milano | 600 x 600 | Sandstone #7

Bullnose | 600 x 300 | Sandstone #7

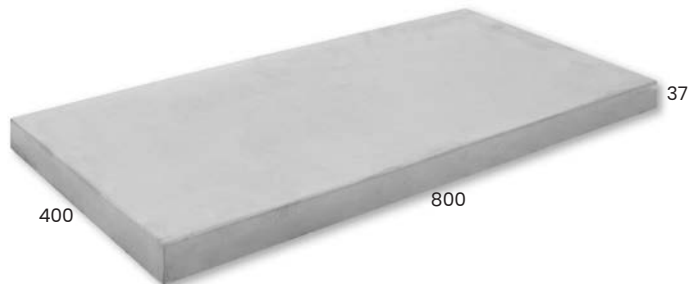


Milano 800 x 400 x 37 MM

Paver Specs



Units per m ²	3.13
m ² per pallet	12.46
units per pallet	39

Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.

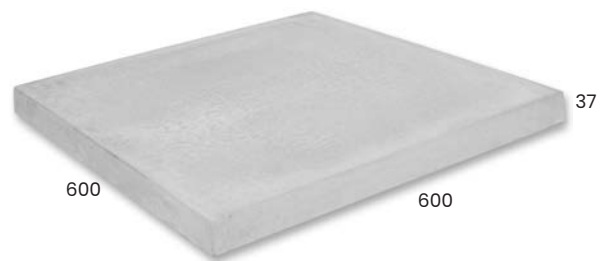

Milano 600 x 600 x 37 MM

Paver Specs


Units per m ²	2.77
m ² per pallet	15.88
units per pallet	44


Designer Colours



Designer Colours Made To Order


Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.



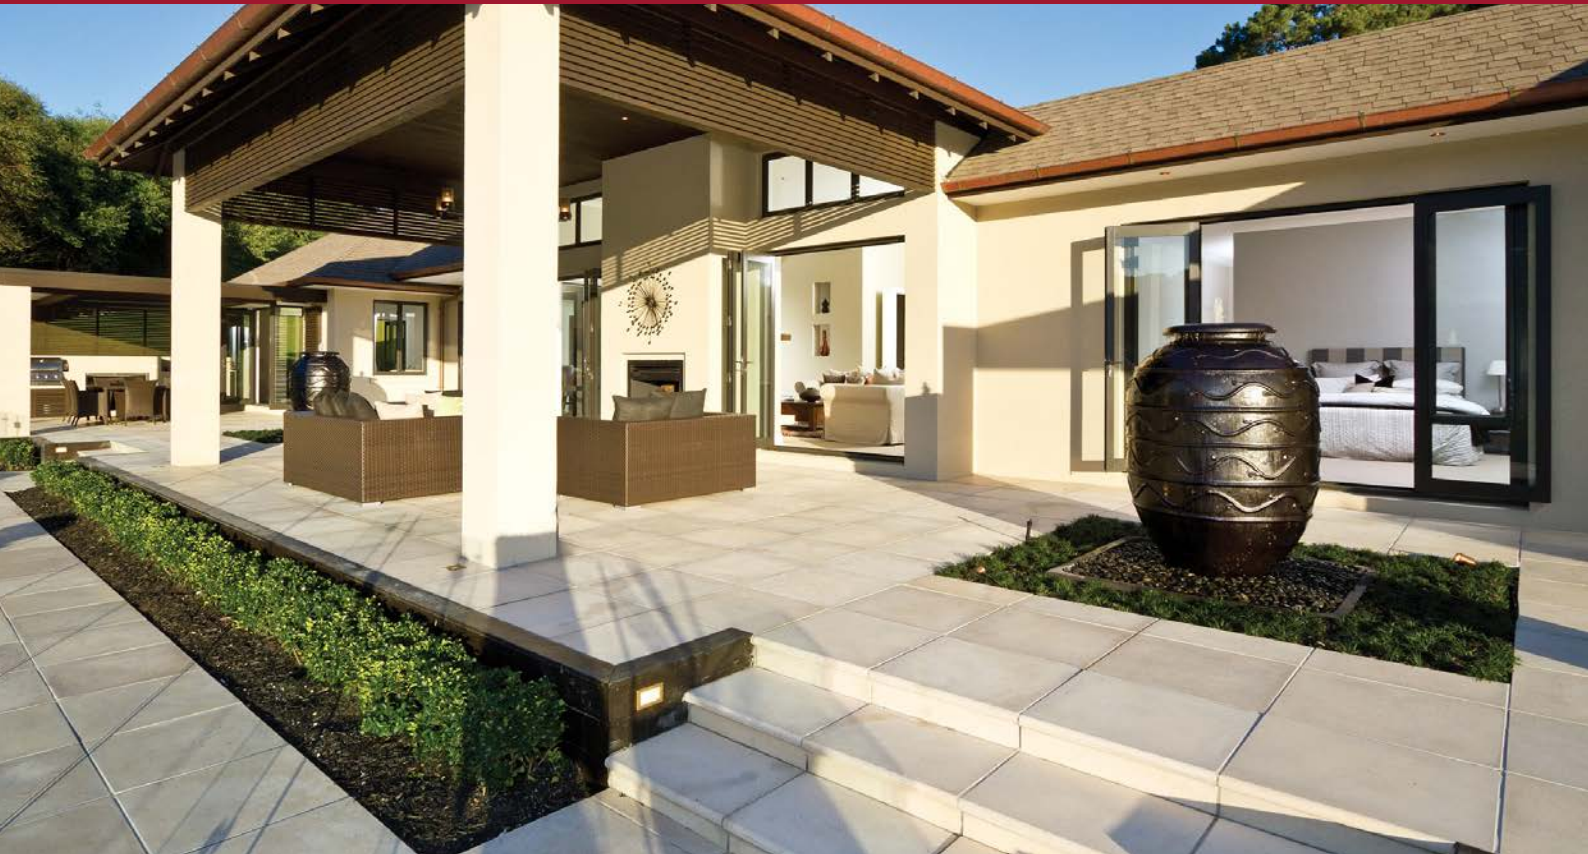

Milano | 600 x 600 | Sandstone #7

Bullnose | 600 x 300 | Sandstone #7

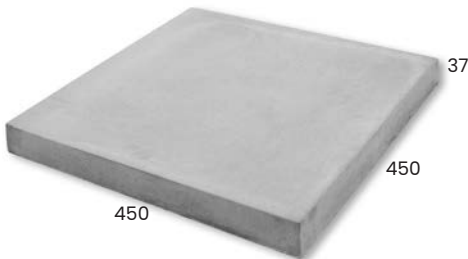

Milano 450 x 450 x 37 MM

Paver Specs


Units per m ²	4.93
m ² per pallet	12.98
units per pallet	64

Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.

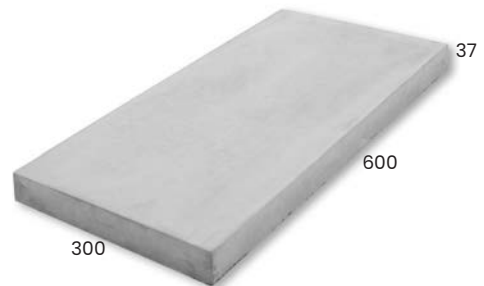

Milano 600 x 300 x 37 MM

Paver Specs

Units per m ²	5.55
m ² per pallet	15.85
units per pallet	88

Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.



NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



Milano | 450 x 450 | Natural Stone



Milano 300 x 300 x 37 MM

Paver Specs

Units per m ²	11.11
m ² per pallet	15.84
units per pallet	176

Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.




Milano 600 x 150 x 37 MM

Paver Specs

Units per lineal mtr	1.66
Lm per pallet	106
units per pallet	176
(m ² per pallet)	(15.84)

Designer Colours



Beauty your world...



Bullnose | 450 x 450 | Natural Stone

Milano | 450 x 450 | Natural Stone



Milano | 600 x 600 | Sandstone #7



Milano | 600 x 600 | Natural Stone

600 x 150 | Grey River



Milano | 600 x 600 | Sandstone #7




Milano | 600 x 600 | Natural Stone (Sealed)

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



Romani | 600 x 600 | Cream Sands (Sealed)

Romani | 300 x 300 | Cream Sands (Sealed)

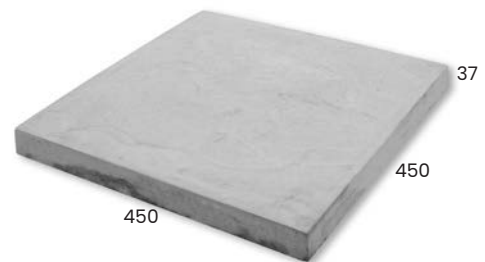

Romani 600 x 600 x 37 MM

Paver Specs

Units per m ²	2.77
m ² per pallet	15.88
units per pallet	44

Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.



Romani 450 x 450 x 37 MM

Paver Specs

Units per m ²	4.93
m ² per pallet	12.98
units per pallet	64

Designer Colours



Designer Colours Made To Order


Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.





Romani | 600 x 600 | Cream Sands (Sealed)

Romani | 300 x 300 | Cream Sands (Sealed)

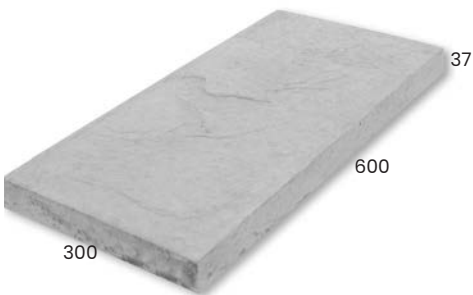

Romani 600 x 300 x 37 MM

Paver Specs


Units per m ²	5.55
m ² per pallet	15.85
units per pallet	88

Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.



Romani 300 x 300 x 37 MM

Paver Specs

Units per m ²	11.11
m ² per pallet	15.84
units per pallet	176

Designer Colours



Designer Colours Made To Order


Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.



NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



Palazzo | 450 x 450 | Grey River

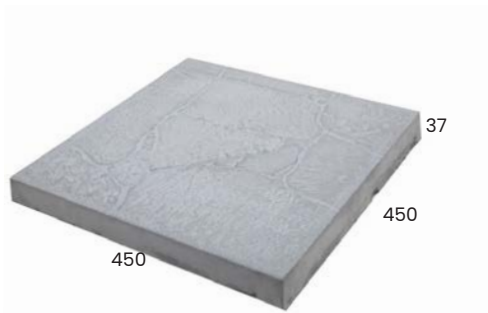


Palazzo 450 x 450 x 37 MM

Paver Specs

Units per m ²	4.93
m ² per pallet	12.98
units per pallet	64

Designer Colours

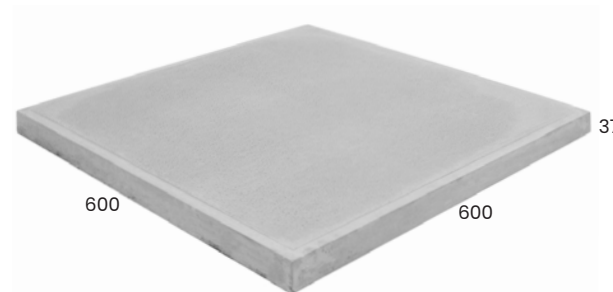


Viltorio 600 x 600 x 37 MM

Paver Specs

Units per m ²	2.77
m ² per pallet	15.88
units per pallet	44

Designer Colours



Beauty your world...





**NEW
PRODUCT**

AREZZO PAVER

Paver Specs

Units per m ²	4.73
m ² per pallet	13.53
units per pallet	64

Designer Colours

	
GREY RIVER	NATURAL STONE

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



Milano | 450 x 450 | Grey River (Sealed)



Milano | 600 x 600 | Cream Sands (Sealed)



Romani | 600 x 600, 600 x 300, 300 x 300 | Sunset Haze



Milano | 600 x 600 | Sandstone #7



Romani | 600 x 600 | Natural Stone & Grey River (Sealed)



Milano | 450 x 450 | Sandstone #7





Milano | 600 x 600 | Sandstone #7



Milano | 600 x 600 | Sandstone #7



Milano | 450 x 450 | Grey River (Sealed)



Milano | 600 x 600 | Sandstone #7




Milano | 450 x 450 | Grey River (Sealed)



Milano | 450 x 450 | Natural Stone

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.

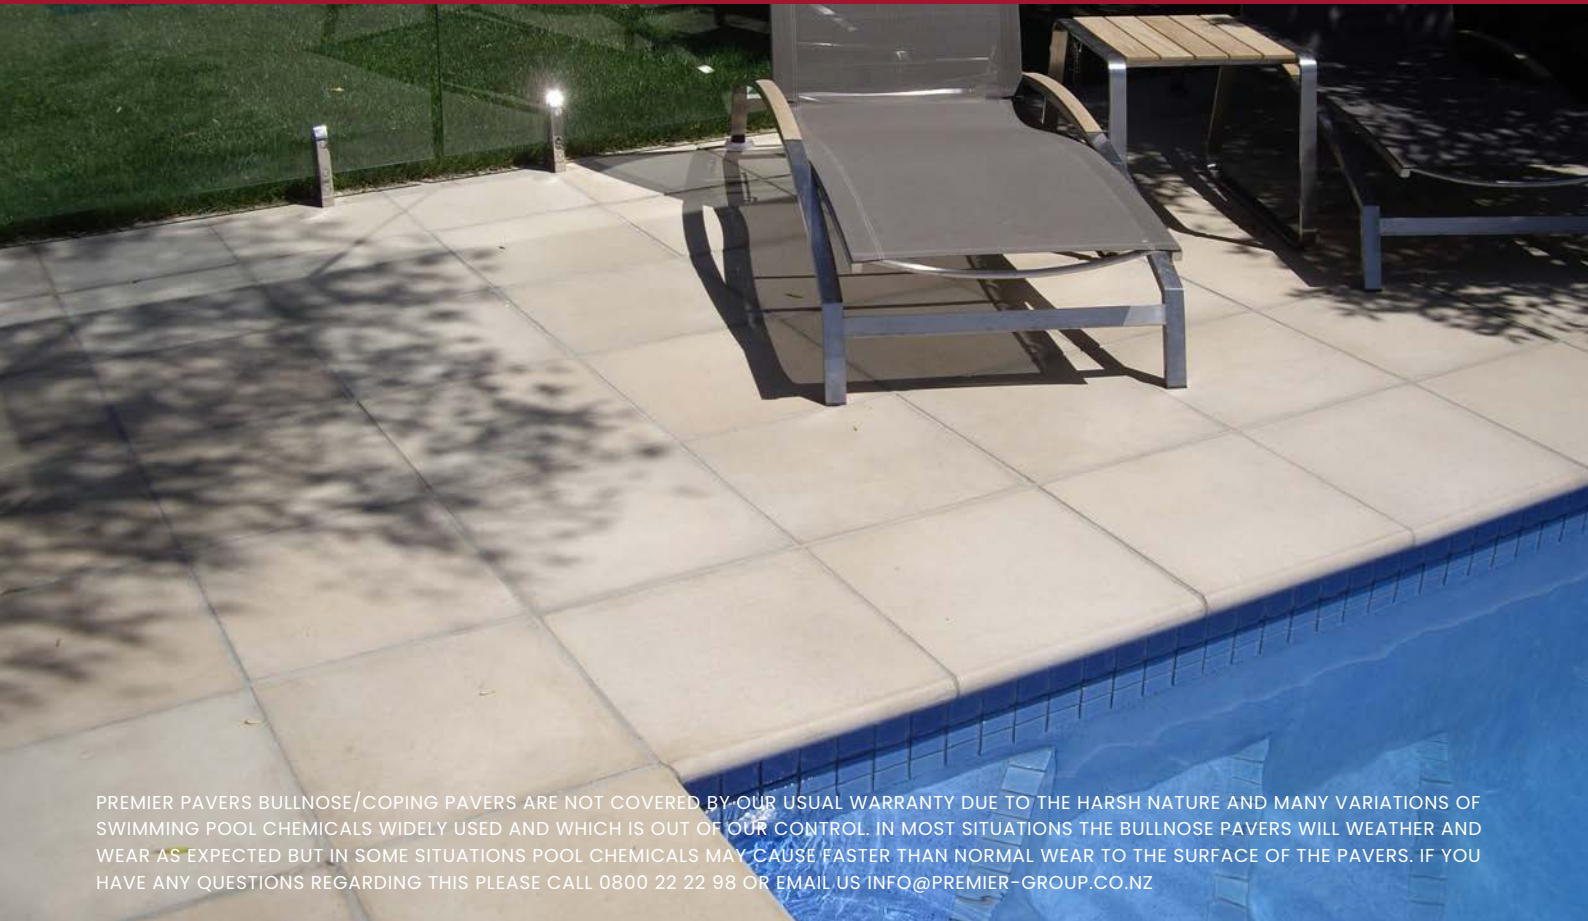

PREMIER PAVERS BULLNOSE/COPING PAVERS ARE NOT COVERED BY OUR USUAL WARRANTY DUE TO THE HARSH NATURE AND MANY VARIATIONS OF SWIMMING POOL CHEMICALS WIDELY USED AND WHICH IS OUT OF OUR CONTROL. IN MOST SITUATIONS THE BULLNOSE PAVERS WILL WEATHER AND WEAR AS EXPECTED BUT IN SOME SITUATIONS POOL CHEMICALS MAY CAUSE FASTER THAN NORMAL WEAR TO THE SURFACE OF THE PAVERS. IF YOU HAVE ANY QUESTIONS REGARDING THIS PLEASE CALL 0800 22 22 98 OR EMAIL US INFO@PREMIER-GROUP.CO.NZ

Milano | 450 x 450 | Sandstone #7

Bullnose | 450 x 450 | Sandstone #7



Bullnose 600 x 600 x 37 MM

Paver Specs

1.66 units per lineal mtr
 16.8 lm per pallet
 No MOQ required but a freight charge will apply

Designer Colours Made To Order

Allow 4 weeks lead time depending on season.
 50% deposit required at time of order for non stocked items.



Ideal for large pools with straight edges and to create grand entrance ways and steps.

DESIGN TIP:
 Looks great with all other 600 x 600 pavers in our range.



Bullnose 450 x 450 x 37 MM

Paver Specs

2.22 units per lineal mtr
 19.8 lm per pallet
 No MOQ required but a freight charge will apply

Designer Colours Made To Order

Allow 4 weeks lead time depending on season.
 50% deposit required at time of order for non stocked items.



Ideal size for steps and stairs.

DESIGN TIP:
 Looks great around medium to large size pools along with any 450 x 450 pavers from our range.



Bullnose 600 x 300 x 37 MM

Paver Specs

1.66 units per lineal mtr
 33.7 lm per pallet
 No MOQ required but a freight charge will apply


Designer Colours Made To Order

Allow 4 weeks lead time depending on season.
 50% deposit required at time of order for non stocked items.



Ideal for medium to large size pools with straight edges.

DESIGN TIP:
 Looks great with 600 x 600 pavers from our range.



Bullnose 300 x 300 x 37 MM

Paver Specs

3.33 units per lineal mtr
 29.7 lm per pallet
 No MOQ required but a freight charge will apply

Designer Colours Made To Order


Allow 4 weeks lead time depending on season.
 50% deposit required at time of order for non stocked items.



Ideal for curving pools edges and steps.

DESIGN TIP:
 Looks great with 600 x 600 pavers from our range.

NOTE: ALL BULLNOSE PAVERS HAVE 4 WEEK LEAD TIME!

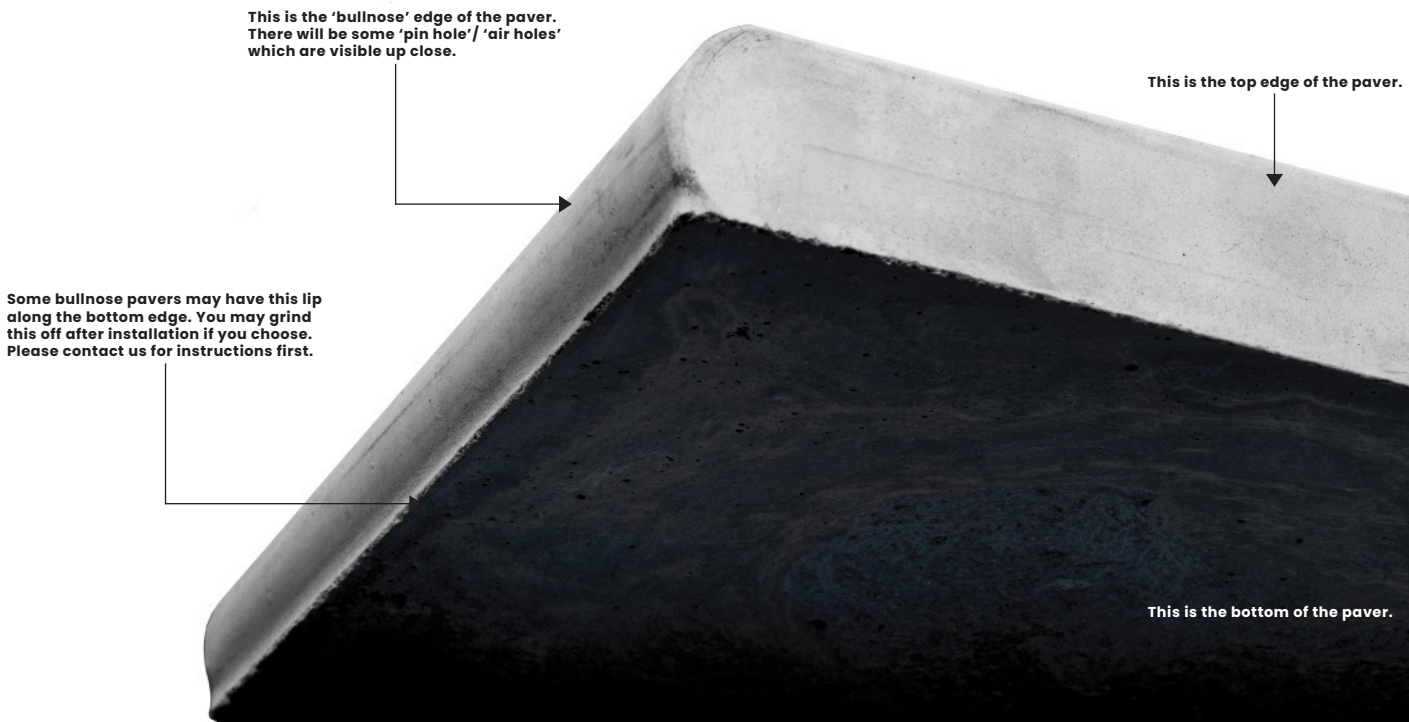

YOUR BULLNOSE PAVERS WILL BE MADE SPECIFICALLY TO YOUR ORDER. HANDCRAFTED AND INDEED UNIQUE. PLEASE ALLOW A 4 WEEK LEADTIME. CONCRETE PRODUCTS CAN VARY FROM BATCH TO BATCH (PLEASE SEE OUR TERMS & CONDITIONS), AND THEREFORE WE RECOMMEND THAT YOU ALLOW FOR UP TO 10% EXTRA BULLNOSE PAVERS WHEN YOU ORDER SO YOU HAVE SPARE PAVERS FROM THE SAME BATCH IN CASE YOU HAVE EXCESSIVE BREAKAGES OR A LOT OF WASTAGE FROM CUTTING. BECAUSE WE MANUFACTURE TO ORDER, IF WE HAVE A FEW EXTRA PAVERS FROM YOUR BATCH, WE WILL ADD THEM TO YOUR ORDER FOR FREE.





Garden Wall | Charcoal Blend

NOTE: This image shows the block upside down to show the nib.




Garden Wall 270 x 270 x 70 MM

Specs

Units per m ²	53
m ² per pallet	3
units per pallet	160

Designer Colours



Designer Colours Made To Order

Allow 4-6 weeks lead time, MOQ is 5 full pallets.
50% deposit required at time of order for non stocked items.




Garden Wall Cap 270 x 270 x 40 MM

Specs

Units per lineal mtr	3.7
units per pallet	208

Designer Colours



Beauty your world...



Garden Wall | Charcoal Blend



Garden Wall | Charcoal Blend



Garden Wall | Charcoal



Garden Wall | Charcoal Blend



Garden Wall | Charcoal Blend

DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.





GLACIAL FEATURE ROCK


300 - 400 MM
28 pieces/pallet



GLACIAL STEPPER

300 - 600 MM
75 pieces/pallet



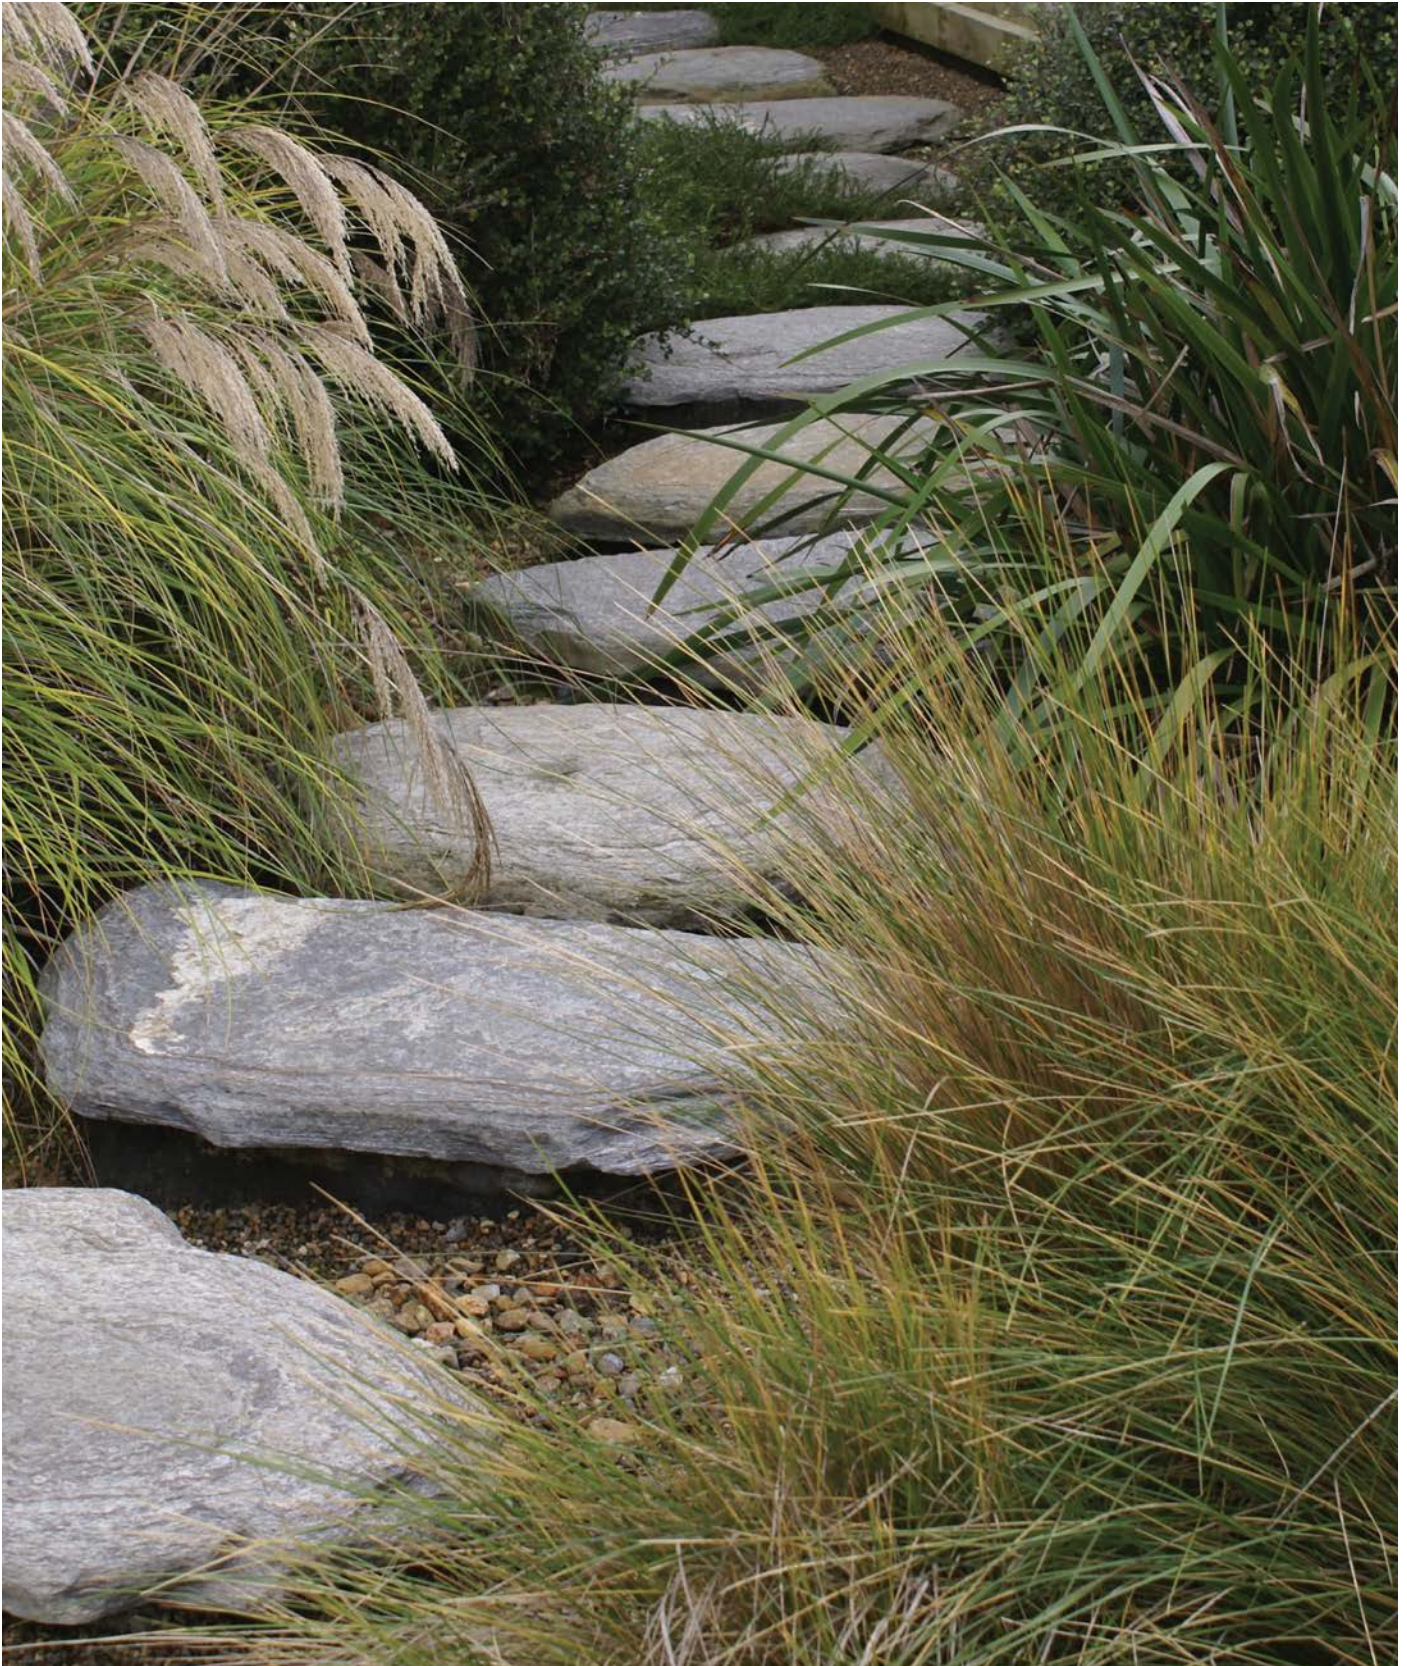

ALPINE STEPPER

300 - 500 MM
100 pieces/pallet

500 - 600 MM
50 pieces/pallet

APPROVED INSTALLERS AVAILABLE. CALL NOW FOR FREE QUOTES OR ADVICE! 0800 22 22 98
PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES! A PRODUCT INSTALLED / LAID IS DEEMED
TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP
TO DATE INFORMATION.

WILD EXPOSURE

All photos are courtesy of Wild Exposure



**PREMIER
SCHIST**

*Timeless Style
and Beauty*



ALPINE GARDEN EDGE

200 - 300 MM
200 pieces/pallet



ALPINE SPLIT SCHIST PAVING

300 - 500 MM
10 m²/pallet





ALPINE JURASSIC WALLING & CORNERS

1 tonne/pallet



ALPINE JURASSIC WALLING & CORNERS

1 tonne/pallet

APPROVED INSTALLERS AVAILABLE. CALL NOW FOR FREE QUOTES OR ADVICE! 0800 22 22 98
PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES! A PRODUCT INSTALLED / LAID IS DEEMED
TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP
TO DATE INFORMATION.

WILD EXPOSURE

All photos are courtesy of Wild Exposure

**PREMIER
SCHIST**
*Timeless Style
and Beauty*



Alpine Slabs Various Sizes




Alpine Steppers



Alpine Natural Brick Walling



Alpine Slabs

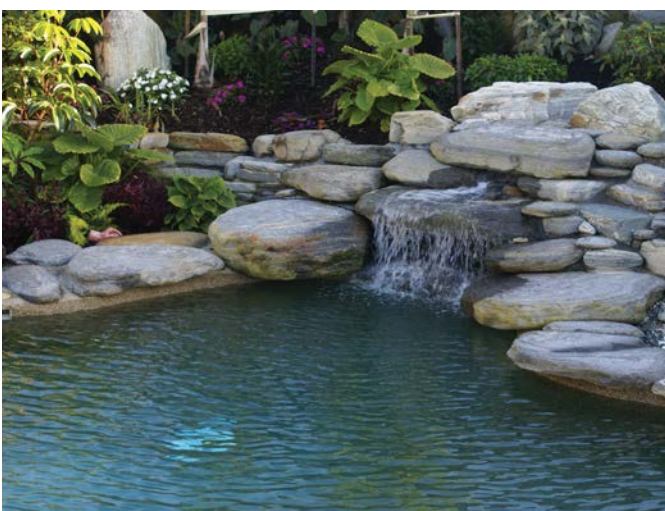

Alpine Slabs



Alpine Slabs & Steppers

APPROVED INSTALLERS AVAILABLE. CALL NOW FOR FREE QUOTES OR ADVICE! 0800 22 22 98
PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES! A PRODUCT INSTALLED / LAID IS DEEMED
TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP
TO DATE INFORMATION.

WILD EXPOSURE

All photos are courtesy of Wild Exposure



PREMIER GROUT-JOINT P30

Hardens with moisture (WETCAST PAVERS ONLY)

The quick and easy solution to filling joints between paving slabs and setts, suitable for natural stone and concrete paving. So simple to use, Premier-Joint P30 allows an untrained hand to consistently deliver perfect joints every time - whatever the weather! Available in two colours - Neutral (Buff) and Mid-Grey. It delivers a weed free, frost resistant joint, without staining the paving - SAVING YOU TIME AND MONEY. For vehicle trafficked areas use one of our 2-part epoxy systems such as Premier-Pro-Joint P75.



PREMIER GROUT-JOINT P75

Hardens with moisture (WETCAST PAVERS ONLY)

The quick and easy solution to filling joints between paving slabs and setts, suitable for natural stone and concrete paving. So simple to use, P75 allows an untrained hand to consistently deliver perfect joints every time with a minimum joint width of 5mm. Available in two colours - Neutral (Buff) and Mid Grey. It delivers a weed-free, frost-resistant joint, without staining the paving - saving you time and money.



PREMIER-WETLOOK-SEALER

The Wetlook Sealer is an environmentally friendly concrete sealer. The sealer will enhance the colour of the substrate when applied in ONE coat and is formulated for exterior and interior use. Great for surfaces that require a higher-end, yet cost-effective finish and holds up very well to traffic such as retail stores, restaurant floors, industrial floors, garages, etc.

Also performs very well over decorative concrete including stained and stamped concrete, overlays, natural/manufactured stone, concrete countertops, pavers and exposed aggregate.

Coverage: Approx 10m² per litre 1 coat. Available in 3.79 litre container.



PREMIER-PENETRATING-SEALER

The Penetrating Sealer is a water and oil repellent penetrating sealer with colour enhancing properties. It is designed to penetrate deeply into porous surfaces such as interior or exterior concrete, stone and pavers. It also helps repel dirt, dust and resists stains making the surface easier to clean. The Penetrating Sealer helps bead liquids and resists staining and discolouration from most common spills including dirty auto fluids, beverages and many other fluids making clean-up much easier. The Penetrating Sealer is breathable allowing vapours in the substrate to escape.

Coverage: Approx 10m² per litre. Available in 3.79 litre container.



PREMIER-EFFLORESCENCE-REMOVER

Particularly effective at removing efflorescence, calcium carbonate, lime and scale lime off masonry, concrete, and metal surfaces. It is an eco-friendly, non-fuming alternative to harsh acids, such as muriatic acid, for removing efflorescence. It is formulated with metal protectors to prevent the acid attack on any metals enabling its powerful blend of active surface agents to be used on many surfaces. It will also prevent recurrence of efflorescence.

Coverage: Approx 5m² per litre. Available in 3.79 litre container.



PREMIER-GLOSS-SEALER

Use this sealer if you require superior protection from water, oil and grease. This sealer will give your pavers a "wet look" - so they will appear darker than the original colour. This sealer can also be used for most paving, concrete driveways and patios and natural stone materials.

Available in 3.79, 10 and 20 litre container.



PREMIER-ANTI-SLIP-SEALER

Use this sealer if you require extra safety and superior protection from water, oil and grease. This sealer will give your pavers a "wet look" - so they will appear darker than the original colour. This sealer can also be used for most paving, concrete driveways and patios and natural stone materials.

Available in 3.79, 10 and 20 litre container.



PREMIER-PAVER & CONCRETE-FORTIFIER

Paver & Concrete Fortifier is a premium grade concrete and masonry weather proofer and fortifier. The formula densifies, strengthens and makes the surface water-repellent by penetrating into and chemically reacting properties of the substrate. Paver & Concrete Fortifier's chemical reaction creates a bond that permanently increases the lifespan of concrete. Paver & Concrete Fortifier does not create a film on the surface that would trap moisture vapour; it does not change the texture; it leaves a natural-looking and more durable finish.

Coverage: Approx 10m² per litre. Available in 3.79 litre container.



PREMIER-ACID-WASH

When pavers, concrete or bricks lose their original beauty and dirt becomes embedded in the surface and before you seal your patio or driveway for the first time, it is necessary to acid wash your product. PREMIER-ACID-WASH makes this process simple and easy with clear instructions to follow. Acid wash will restore your pavers, concrete or bricks to their former glory.

Available in 5 litre container.



PREMIER-WHITE-CEMENT

Premier White Cement is a high quality, high strength multi-purpose white cement. This cement is best used for mortar matching lighter colour products such as Premier Bricks or Premier Pavers. For optimum colour consistency use in conjunction with the Premier Washed Sand. AVAILABLE IN 20KG BAGS.

PREMIER-GREY-CEMENT

Premier Grey Cement can be used for all your general purpose concrete/mortar needs. The high quality cement provides a strong and enduring solution. AVAILABLE IN 40KG BAGS.



PREMIER-SWEEP-IN-GROUT

Hardens with moisture (DRYCAST PAVERS ONLY)

Has been specifically formulated using graded washed sand and additives, to allow rapid filling of all vertical joints in segmental paving. It is a jointing material which generally conforms to guidelines set out by the clay brick and paver Institute's 'Design Manual One for Segmental Paving Units'. PREMIERSWEEP-IN-GROUT is suitable for use in the following situations: driveways, footpaths, heavy traffic areas, sloping sites, high wind areas, roadways, airport standing areas, and surfaces where mobile vacuum sweepers are used. AVAILABLE IN 30KG BAGS.



Base Course Calculator

1 m³= 1.6 Tonne

Example:

Area (m ²)	40.0
Thickness (m)	0.100
Volume (m ³)	4.0
Plus Compaction %	1.30
Total Volume (m ³)	5.2
Base Course Required (Tonne)	8.3

GAP20 Calculator

1 m³= 1.48 Tonne

Example:

Area (m ²)	40.0
Thickness (m)	0.100
Volume (m ³)	4.0
Plus Compaction %	1.00
Total Volume (m ³)	4.0
Base Course Required (Tonne)	5.9

Mortar Mix Calculator

1 m²= 25kg

Example:

Area (m ²)	1.20
Mortar Mix Required (kg)	30.00
Bag Size (kg)	30
Total Number of Bags	1.0

Eco Acid Wash Calculator

1 m²= 0.2 Litres

Example:

Area (m ²)	20.0
Acid Wash Required (L)	4.00
Bottle Size (L)	3.8
Total Number of Bottles	1.0

Sweep in Grout Calculator

1 m²= 3kg

Example:

Area (m ²)	50.00
Sweep In Grout Required (kg)	150.00
Bag Size (kg)	30
Total Number of Bags	5.0

Wetlook Sealer Calculator

1 m²= 0.1 Litres one coat

Example:

Area (m ²)	40.0
Wetlook Sealer Required (L)	4
Bottle Size (L)	3.8
Total Number of Bottles	1.0

P30 Calculator

Approx coverage per 12.5kg tub

Joint Size:	600x600mm Pavers	450x450mm Pavers	100x100mm Setts
5mmx30mm deep	15.6m ²	11.4m ²	2.5m ²
10mmx30mm deep	7.8m ²	5.7m ²	1.3m ²
15mmx30mm deep	2.5m ²	3.8m ²	0.85m ²

P75 Calculator


Approx coverage per 25kg tub

Joint Size:	600x600mm Pavers	450x450mm Pavers	100x100mm Setts
5mmx30mm deep	26m ²	21m ²	5.42m ²
10mmx30mm deep	13m ²	11m ²	2.87m ²
15mmx30mm deep	7m ²	7m ²	2m ²

HOW TO CHOOSE YOUR PAVERS AND ACHIEVE 40 THE LOOK YOU DESIRE

STEP 1.

Measure your area to be paved to determine quantity of pavers required. This area is simply calculated by length (m) x width (m) = area (m²) for basic square or rectangle spaces (m=meters).



STEP 2.


Select the paver size that you prefer. Your choice will depend on the look you wish to achieve. Also check out our 'GENERAL TIPS' below.

STEP 3.

Select a colour that complements your area, home and surroundings.

STEP 4.

Choose to D.I.Y (do it yourself) or hire a professional contractor. If you want assistance call us on 0800 22 22 98.



For triangular areas

$$1/2 \text{ base} \times \text{height} = \text{area (m}^2\text{)}$$

Example:

$$1/2 \text{ of } 4\text{m} = 2\text{m} \times 3\text{m} = 6\text{m}^2$$



For odd shapes, break your area into sections

1. $5\text{m} \times 3\text{m} = 15\text{m}^2$
 2. $4\text{m} \times 2\text{m} = 8\text{m}^2$
 3. $3\text{m} \times 4\text{m} = 12\text{m}^2$
- Total = 35m^2

GENERAL TIPS

TIP 1: Select pavers that match internal floor coverings to ensure the transition from indoor-out is subtle and blends with your decoration style.

TIP 2: If paving around pools or building steps, choose from our bullnose range to create a smooth finish.

TIP 3: Combining large and small format pavers can add textural qualities for a more distinctive space.

TIP 4: When paving a small space, keep the design simple and use a neutral coloured, large format paver to create a sense of space.

TIP 5: Large format pavers, such as 600 x 600mm speed up the laying process.

TIP 6: Lighter coloured pavers make a shady area seem much brighter and warmer.


TIP 7: Darker colours add contrast and interest to your outdoor areas.

TIP 8: Once your Premier Pavers are laid, use Premier Sealer to maintain a 'just laid look'. This will also help prevent fading, staining and efflorescence.




Beautify your world...


FOR SQUARE PAVERS ONLY




STACK BOND




STRETCHER BOND




45° STRETCHER BOND




TUDOR DESIGN
600x600, 600x300,
300x300
(1.6 of each size per m²)




DIAMOND



STACK BOND WITH
CONTRASTING BORDER




CHEQUER BOARD




DUTCH DESIGN
600x600, 300x300
(2.23 of each size per m²)


FOR RECTANGULAR PAVERS ONLY




STRETCHER BOND




45° STRETCHER BOND WITH
FLAT HEADER COURSE




90° HERRINGBONE



BASKET WEAVE



STACK BOND



HALF BASKET WEAVE

SPECIAL DESIGNS
FOR ROMANI AND
MILANO PAVERS
ONLY



STEP 1.

For light pedestrian use on well consolidated ground, excavate the depth of the pavers plus 50mm for the PREMIER-BASE-COURSE layer. For heavy garden equipment, vehicle traffic, hard standing or poor ground – a sub base of 150 – 200mm depth is required. The sub base should be well compacted and consist GAP-20 or similar (not larger than 25mm aggregate). Provide a fall of 10 – 15mm over every 1 metre to allow for water runoff. The falls should be away from the house or walls unless linear surface drainage channels are used. Building regulations require paving to be a minimum height below the floor level. Check your local building regulations for this information.



STEP 2.

Any area of pavers must be surrounded by a firm edge restraint to stop the blocks and sand from moving sideways. New and existing walls, kerbs or the pavers themselves laid on a suitable concrete bed can all be used to serve this purpose. Any concrete used to fix edge restraints must be allowed time to cure and gain strength before any vibration is commenced.



STEP 3.

After sub base excavation and fill (if required) screed out PREMIER-BASE-COURSE on top of the sub base within the restrained area to an approximate depth of 65mm. Then compact with a plate compactor (obtained from you local hire shop). Then spread PREMIER-WASHED-SAND over at approx 5-10mm thickness and screed off to give a firmly compacted thickness of 50mm. One tonne of PREMIER-BASE-COURSE covers approximately 8m².



STEP 4

Individual pavers are then simply placed onto the sand bed and according to the pattern, laying progresses from a corner or long edge and should proceed along one laying face until work is finalised. Pavers from several packs should be well mixed to enhance colour blending.



STEP 5.

Cutting of pavers may be required to fill gaps between edge restraints. This may be done using a hammer and bolster chisel. If a lot of cutting is necessary, a mechanical block splitter or power cutter can be hired.



STEP 6.

With a stiff broom, thoroughly brush a quality joint sand over the pavers to fill the joints before compacting. For smaller areas use a rubber mallet to compact. For larger areas use a plate compactor. Carpet may be required when compacting these pavers to help prevent them from cracking. Keep sweeping PREMIER-SWEEP-IN-GROUT in until all joints are topped up. Sweep in thoroughly to avoid staining during spraying. Then spray a fine mist of water over the area to help set the grout. ONLY USE SMALL AMOUNT OF WATER

STEP 7.

To maintain a just laid look, you can seal your pavers using either PREMIER-SEALER product of your choice. Talk to your local PREMIER distributor about PREMIER-SEALER for your pavers. Unsealed paving will weather naturally making colours appear less intense.

STEP 8.

Step back – relax and enjoy the finished result.

WHAT YOU NEED: CHECKLIST

- PAVERS: Calculate required amount
Granular fill for the sub base use:
- PREMIER-BASE-COURSE (Bagged 1000KG)
- PREMIER-WASHED-SAND
- PREMIER-SWEEP-IN-GROUT
- CEMENT BUILDERS MIX
- Shovel, spade and rake
- Tape measure Level
- Stakes and stringline Gloves and earmuffs
- Compactor Wheel barrow
- Straight edge/screed
- Bolster or paving saw to cut pavers






1. Mark out and dig trench



2. Fill trench with PREMIER-BASE-COURSE



3. Level and compact GAP 7



4. Lay first layer




5. Lay drain coil and drainage aggregate



6. Lay second layer, continue laying and check levels



7. Check levels



8. Backfill with drainage aggregate and soil as you go



9. Place capping stones on and glue down if you wish



10. Enjoy the beautiful finished result!

STEP 1 . SITE PREPARATION AND EXCAVATION

Dig out the area behind where your wall will go to allow for drainage and back fill. Then dig a trench 500mm wide and 200mm deep along the line of your walls planned base.

STEP 2 . PREPARE A LEVEL BASE

Compact the soil in the base of your trench. Then fill trench with PREMIER-BASE-COURSE or similar and compact evenly. Check with a string line and spirit level to ensure your wall will be built on a solid, level base.

STEP 3 . INSTALL THE FIRST LAYER

You must ensure the first layer is perfectly level. Place the blocks onto the base and tap with rubber mallet. As you lay the first layer – check that it is level from side to side and back to back. Check the back of the first layer with string line. On a sloping site, step the trench in 100mm increments to ensure blocks remain level. Always start laying your wall from the lowest point and work uphill.

STEP 4 . DRAINAGE

If your wall is going to be 3 layers or more high, then place a “punched” drainage coil behind the first layer of blocks. Extend the coil away from the wall and connect to the nearest silt trap. Cover the coil with drainage aggregate.

STEP 5 . STACKING AND BACKFILLING

Brush the first course clean and place the second course in a stretcher bond pattern. Ensure the nibs of the upper block engages with the back of the bottom block to prevent movement. As each layer is finished, place drainage aggregate and backfill behind the wall and compact the back fill every 2 courses. Continue until finished height is achieved. Then place capping stones on the wall to finish off. (These can be glued down with construction adhesive if you desire)

THIS method will HELP overcome problems such as ants, weeds, sinking, and separating.



STEP 1 .
Digout topsoil to 120mm. Install PREMIER-BASE-COURSE and rake out.



STEP 2 .
Compact base course to 60mm thick using feet or preferably plate compactor.



STEP 3 .
Check levels with tape measure. Your base course should be approx 60mm below the finished level of your paving.



STEP 4 .
Check levels with spirit level.



STEP 5 .
Mix bagged MORTAR-MIX with water to toothpaste consistency (in a wheelbarrow or mixer) or mix PREMIER-WASHED-SAND with cement, water and plasticiser - sand and cement can be ordered from PREMIER.



STEP 6 .
Trowel 5 spots of mortar mix onto base course. Then lay a strip of mortar where the next joint will be.



STEP 7 .
the spots (the mortar should squash down and spread out to 20mm thick. Use a sponge to wet the back of each paver before you lay.



STEP 8 .
Gently tap paver down to desired level with rubber mallet. Joints should be approx 10mm wide at top of paver.

DO NOT BUTT HARD TOGETHER.



STEP 9 .
Check levels across pavers continuously and tap down if needed.



STEP 10 .
You should end up with approx 40mm paver, 20mm mortar, 60mm base. When all pavers are laid - DO NOT WALK ON FOR 24 HOURS.



STEP 11 .
Wet the surface of the pavers and pour on the PREMIER P30. Wet the grout thoroughly and sweep into the joints. Only grout 4-5m² at a time. Ensure the grout is a wet slurry!



STEP 12 .
Sweep off the remainder of the grout 45 degree to the grout lines.



STEP 13 .
Only seal if required. Hire a professional! PAVERS MUST BE 100% DRY BEFORE SEALING.



UPLOAD IMAGES OF YOUR PROJECT AND GO IN MONTHLY PRIZE DRAW TO WIN THIS GIANT HAMPER!

PHOTO'S WE LOVE TO SEE ARE:

1. Before and after pics
2. Completed project pics
3. Stage by stage pic's
4. Pics showing overall house and landscape including Premier and other products
5. Combinations or single pic's of bricks, pavers, edging, pebbles, schist, retainers rocks etc...



UPLOAD NOW! - SEND PHOTOS TO marketing@premier-group.co.nz

PLEASE CUT HERE

PREMIER WARRANTY FORM

YOU MUST FILL OUT ALL DETAILS TO RECEIVE YOUR WARRANTY CERTIFICATE

Name: _____ Address: _____

Email: _____ Home Phone: _____ Cellphone: _____

Type of paver or product Texture: _____ Store: _____
 Size: _____ Suburb: _____
 Colour: _____ City: _____

PLEASE STAPLE YOUR PROOF OF PURCHASE RECEIPT

For what purpose was the product purchased:
 Brick Veneer Driveway Pool Area Pathway Indoors Garden

How clear did you find the instructions?
 Easy to follow Adequate Need to improve

Are there any improvements you feel could be made to our product or instructions?

THANK YOU FOR YOUR COMMENTS!

Please cut the warranty slip and post within 21 days to:

Premier Group International
 PO Box 12172, Chartwell
 Hamilton 3248
 New Zealand

We will post your warranty certificate to you.



TERMS AND CONDITIONS

In the unfortunate but unlikely event of products reaching you in less than satisfactory condition, please notify the retailer immediately.

PLEASE NOTE: Whilst every effort has been made to give sound advice, Premier Group International can take no responsibility for any loss, damage or injury sustained in following it, neither can Premier Group accept any liability in respect of products being used for any purposes other than those for which they were intended by the manufacturer. Premier Group cannot accept any liability for quality of installation of pavers or interpretation of the laying guide as these procedures are beyond Premier Group control. Premier Group recommends that all products are installed by specialist approved installers.

EFFLORESCENCE

All concrete products may, in their early life, appear to lose some intensity of colour and experience a milky-white stain on the face of the product. This is efflorescence staining. It is a temporary phenomenon and is in no way detrimental to the performance of the material and responsibility cannot be accepted for its occurrence. Clay products may also suffer from a temporary white stain called efflorescence. This is quite different from efflorescence in concrete products and is caused by soluble salts within the clay being transported by water to the surface as they dry out. Responsibility cannot be accepted for its occurrence. For further information on efflorescence staining in both clay and concrete products, please call.

COLOUR VARIATION

The colours shown in this literature are as exact as photographic and printing processes will allow. We strongly recommend that colours are judged and chosen from actual materials rather than photographic representation depicted herein. Although every effort is made to ensure consistency of product colour, variations between production batches can occur. We therefore recommend that, when purchasing materials, especially in the case of larger quantities, they all come from the same batch and that products are thoroughly mixed onsite by drawing from a minimum of three packs. All natural stone Sandstone products vary with differing geological conditions. Such variations can lead to small particles of ironstone within the product creating a darkening of the surface during natural weathering.

MAINTENANCE

Paving materials require periodic cleaning to maintain their appearance. Regular sweeping to prevent the build-up of detritus is recommended. Light coloured blocks, whilst structurally sound for driveway use, are liable to emphasise tyre marks and oil spills on the driveway. It must be accepted that these products will need more maintenance if the overall appearance is to be maintained. Proprietary cleaning agents are widely available and details of these can be obtained through Premier Group, please phone 0800 22 22 98. Care should be taken when buying cleaning agents as some varieties contain a concentration of acid, which can adversely affect the appearance of concrete products, clay and natural stone. For general cleaning of

GENERAL CARE

Sweep regularly with a stiff bristled broom to keep free from debris. During construction, cover the paved areas to protect against damage.

Protect your pavers against possible staining from mortar, oxides, cement and rust. Do not use high pressure cleaning apparatus to clean pavers. In all cases, attempt to clean a stain before it hardens or dries.

If a stain occurs, follow some simple steps: assess type of stain carefully before taking action (incorrect assessment of stain can cause the stain to be more difficult to remove). If the stain cannot be accurately assessed, conduct a trial process on a small portion of stained area to determine most appropriate action.

HEALTH AND SAFETY

Mixing Mortar: Dry or damp cement and wet concrete/mortar can cause irritation and burns to eyes and skin. Suitable eye protection and PVC gloves should be worn when handling these materials. If contact with the skin does occur, wash off with plenty of water. If contact with eyes occurs, irrigate with plenty of water. If irritation/burning persists, seek immediate medical attention.

Cutting: The cutting of concrete, clay and stone products with high speed cutters produces dust. Inhalation of excessive amounts of dust over a long period of time may cause long-term health effects. Suitable eye protection (safety goggles) and respiratory protection (dust mask) should be used when cutting.

Manual Handling: Most of our products are heavy. Some are very heavy. Appropriate handling precautions include wearing protective gloves and footwear and obtaining assistance when moving items weighing over 20kg.

dirt and algae, vigorous brushing with a stiff yard broom with plenty of hot detergent solution (washing up liquid or non-bio washing powder), thoroughly rinsed with clean water should suffice. Repeated treatment maybe required for paved areas sited beneath trees or in permanent/near shade. In certain circumstances, prolonged contact with wet leaves can result in staining of the paved area. Such contact should be avoided where ever practical. Certain common garden chemicals such as Ferrous Sulphate can stain paving. Please check the information given on the container holding the chemical. If chemicals are spilt on the paving remove immediately by rinsing away with clean water.

Power-washing with high pressure equipment is not normally required. Should these methods be employed, the following precautions should be observed:

1. Paving should be thoroughly swept to remove detritus (loose debris) that could act as an abrasive agent when moved by the force of a power jet.
2. A trial area should be tested before larger scale power-washing takes place.
3. No more than a medium pressure should be applied when washing paving.
4. The power-washing lance should be held at an oblique angle to the paving and at least 200mm (8") from the surface.
5. If excess sand is washed from the joints during the washing exercise, it is important that the joints are re-sanded with similar materials upon completion.
6. If mortar joints between pavers are damaged during power washing they should be re-pointed. made good with fresh pointing as required, to maintain the integrity of the paving.

SUITABILITY / APPLICATION

The paving flags illustrated in this literature are primarily intended for domestic/ landscape use only. Paving flags suitable for areas subject to intense foot traffic, ie pedestrian precincts and commercial applications, etc are detailed in separate literature. This literature is available on request by telephoning 0800 22 22 98. For areas subject to vehicular overrun (driveways, parking areas, etc). block paving products are recommended. The block paving products illustrated in this literature are intended for pedestrian and light vehicular overrun applications (driveways and similar). For pavements subject to frequent overrun of heavy vehicles, block paving from our commercial/specification range should be used. These are detailed in separate literature, copies of which are available on request by phoning 0800 22 22 98.

STAIN REMOVAL GUIDE	
PROBLEM	SUGGESTED CLEANING METHOD
Efflorescence* (white powdery deposit)	Brush first with a stiff bristled broom. Then hose with clean water. If this doesn't work - wash with PREMIER-ACID-WASH as per label instructions. Weathering will eventually stop process from occurring
Leaves, Bark, Algae, Food and Wine Stains	Use 10 part water to 1 part bleach, then wash down
Chewing Gum	Freeze with dry ice and remove with a spatula
Ivy Suckers	Apply a heat gun to the suckers until they go hard. Allow them to cool and dry, then scrub them off with a stiff bristled broom

*Efflorescence occurs naturally in cement based products.



PREMIER PAVERS DIMENSIONS POLICY

ITALIA RANGE & TRUESTONE RANGE

All dimensions given are nominal and subject to manufacturing tolerances. The quoted dimensions of our paving ranges are those normally attained when the slabs are arranged correctly spaced, ie sizes are given inclusive of joints, which are typically 10mm. This policy enables you to simply plan the area covered and quantities required for your project without having to calculate a separate allowance for joint widths. Avoiding the complication of joint measurements is particularly helpful when planning random layouts. If precise dimensions are crucial, confirm the actual sizes and tolerances by measuring several samples of the product at your local stockist. Our policy is continuous innovation and product improvement. We therefore reserve the right to vary designs and specifications without notice.

WEATHERING

It should be appreciated that with all products, natural curing, weathering and site conditions can cause shade variation to appear across the surface of individual paving units. This does not in any way affect the performance of the paving and any such variation will diminish over a period of time as the paving matures. Both natural stone and concrete products are affected by the action of sunlight and rainfall over time.

PREMIER PAVERS 10 YEAR WARRANTY

Premier Group warrant that Premier Pavers will not break up and that the surface will not wear away unusually fast within 10 years from date of purchase. Any liability for product failure that may arise will be limited to repair or replacement of the defective product and will only apply for the benefit of the original purchase. Premier Group will not be liable for any consequential loss or damage, or transport charges.

THE WARRANTY IS CONDITIONAL ON:

1. Construction, installation and maintenance being carried out as specified in the Premier Paver Manual/Brochure/Website. In the case of wetcast paving (Italia range) this means paving MUST be laid using the recommended 5 spot mortar method.
2. Warranty certificate being returned to the manufacturer within 21 days of purchase together with proof of purchase.

THIS WARRANTY DOES NOT COVER THE FOLLOWING:

1. Sealers, grouts or mortar. This includes any issues that may arise relating to or resulting from the application of sealers, grouts and mortars.
2. Normal wear and tear, damage by impact or acts of God.
3. Situations where the Pavers have been subject to exposure to chemicals, water blasters or other corrosion causing products (see Premier Pavers Maintenance info for guidelines).
4. Unsuitable use of the product: e.g. used as Bricks.
5. Batching and natural colour variations.
6. Efflorescence: All cement based products are subject to this natural phenomenon. It can appear to "whiten" or fade the product. It will gradually diminish over time or you can choose to acid wash and seal with Premier Products.
7. Colour: Premier products are manufactured from natural materials for natural results. Colour variation is normal and is part of the natural beauty of the product.
8. For wetcast pavers (Italia range) Thickness variations. (Thickness variation is a non-issue if laid using the recommended 5 spot mortar method).
9. All natural variations as explained in the following statements.

POINTING

We recommend that PREMIER-SWEEP-IN-GROUT (for Lifestyle Range) is used to fill pavings joints and should be completed within a few days of laying. This will provide a more permanent finish and ensure maximum surface drainage. It should be recognised that poor drainage (which includes the sub-base design) may result in water retention which can affect the weathering characteristics of a paved area.

*For wetcast pavers and Truestone use Premier's resin based grout compound P30 or P75. Application instruction and video tutorial are available.

SALES TERMS AND CONDITIONS

Your signature on the freight docket is confirmation that the stock has been received in good condition. Credits cannot be issued where freight dockets have been signed.

IMPORTANT NOTICE

PRODUCT LAID IS DEEMED TO BE ACCEPTED

It is important to understand that Premier Group Products are created from natural materials to achieve a natural look. This means that every Premier product captures nature's variety and beauty and any variations you see will not affect the performance of the product but rather will enhance a natural, weathered stone appearance. Natural variations as explained in the order confirmation and our brochure include: Colour variations, small chipping and texture variations including hairline fissures, crazing and texture variations typical of stone based materials. Any variations from the samples you have seen ensure your paving project is unique and special to your property.

CAUTION! To prevent marking - keep pavers stacked straight and dry until laid!! DO NOT use polystyrene as steppers!!

QUALITY: If for some reason, you are not completely satisfied with the quality of the product, please contact us immediately. We will not accept any claims for labour costs to remove or relay products that have been installed. Our warranty is limited to free replacement of product, deemed to be unsatisfactory by us, before installation takes place. Terms and conditions apply.



IMPORTANT NOTICE: Premier concrete products are handmade to your order and as such feature quality raw materials. Our concrete is made from premium cement, aggregates, oxide and sand and being natural ingredients, variations in colour can occur from paver to paver and batch to batch. Efflorescence, hairline ssures or crazed paving and variations in dimensions is a normal phenomenon of all concrete products. These are normal attributes and highlight your product's individual character and closeness to naturally occurring stones. © Copyright 2023 All rights reserved. Specifications subject to change without notice. **PLEASE NOTE:** All colour reproductions printed on this brochure are as close as possible to the original, however due to the printing process, some variations in colour and shading may occur.

PRODUCT LAID IS DEEMED TO BE ACCEPTED

QUALITY: If for some reason, you are not completely satisfied with the quality of the pavers, please contact us immediately. We will not accept any claims for labour costs to remove or relay pavers that have been installed. Our warranty is limited to free replacement of product, deemed to be unsatisfactory by us, before installation takes place. Terms and conditions apply. Please see website for more information.



100%
MADE IN
NZ

NZ OWNED & OPERATED



Follow us on Premier Social Media

Call now for FREE quotes or advice!

0800 22 22 98

visit us at www.premier-group.nz

email us at info@premier-group.co.nz

PREMIER GROUP NEW ZEALAND

Head Office Te Rapa, Hamilton, New Zealand

Postal Address PO Box 12172, Hamilton 3248, New Zealand



Beautify your world...

Important note: Please visit our website for the very latest / up to date information.



PREMIER™

GROUP NEW ZEALAND

Beautify your world