

Master Oak.

The Oak you love. But better.

Master Oak combines the unique look and feel of original oak with the unbeatable qualities of an HPL: more scratch resistant, colourfast and easy to keep clean.

Bonded durably on two sides of Latvian Birch, Master Oak's matt finish delivers a luxurious appearance and has a unique pattern just like original oak. The natural appearance of Master Oak is enhanced by the different types of pores and depth variations throughout the panel.

KEY FEATURES

- Matching edge banding in long & end grain
- Ultra realistic Oak texture
- No repetitiveness within the sheet
- Latvian Birch substrate.

KEY BENEFITS

- Stain-resistant
- Scratch-resistant
- Colourfast – Unfading Colour.

DIMENSIONS

3020 x 1250mm, 19mm/13ply – Light Natural, Brown, Elegant Black.

- ABS edging: 23m x 1m x 0.8mm – Available in long & end grain.

SCOPE OF USE

Kitchen and bathroom cabinetry (vertical surfaces). Residential, commercial, office, retail and hospitality fitouts. Wall linings.

LIMITATIONS ON USE

For interior use only.



POWERED BY GREEN

Master Oak is manufactured using electricity produced from 100% renewable energy sources with official guarantees of origin.

PERFORMANCE

Environment Protection Standard:
ISO 14001:2005

Quality Management Standard:
ISO 9001:2009

FSC Certified

PEFC Certified.

TECHNICAL SPECIFICATIONS

Standard – EN 636-2

Finish – High Pressure Laminate 0.7mm

Wood Raw Material – European Birch

Density – average 700kg/m³

Class – Hardwood, non-durable

Glue Bond – EN 314-3: Class 2 Exterior

Riga ECOlogical: Bio-based and renewable lignin glue system for safer living and working environments.

EDGING

Matching ABS edging is available in both long and end grain. If leaving the Birch edge detail exposed, we advise to sand and aris all end grain before coating to help prevent moisture ingress and increase longevity.

HANDLING AND STORAGE

Plywood is a natural product that can be affected by changes in ambient weather conditions, causing previously flat sheets to bow or twist. All precautions are taken to minimise this effect, however once the plywood has left our warehouse we cannot guarantee sheets to remain flat.

Avoid leaning sheets against walls. Store sheets where construction activity will not damage sheets. Keep the surface free of contaminants such as dust, oil and adhesives that will affect the surface finishes.

Storage areas should be protected from sun, rain and wind to minimise changes in humidity. Treat sheets as a finished product and avoid dragging sheets across other surfaces.


CUTTING AND CLEANING

For cutting and cleaning instructions, please visit our Master Oak webpage for more information.

www.plytech.co.nz/master-oak



Light Natural

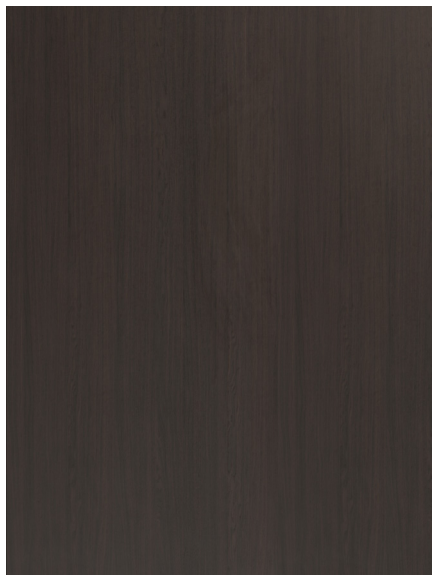

Brown



Elegant Black



PLYTECH SHOWROOM

26 Business Parade North, PO Box 204-070, Highbrook, Auckland 2161, New Zealand. Phone: 09 573 5016, Fax: 09 573 5035

sales@plytech.co.nz

While every endeavour has been made to ensure that all information contained in this product sheet is accurate, it is intended to be used as a guide line only. We reserve the right to amend specifications without notice. Product Warranty is as per our Standard Terms and Conditions of Trade.

plytech