BRANZ Appraised
Appraisal No.510 [2013]

Specialized CONSTRUCTION PRODUCTS LTD

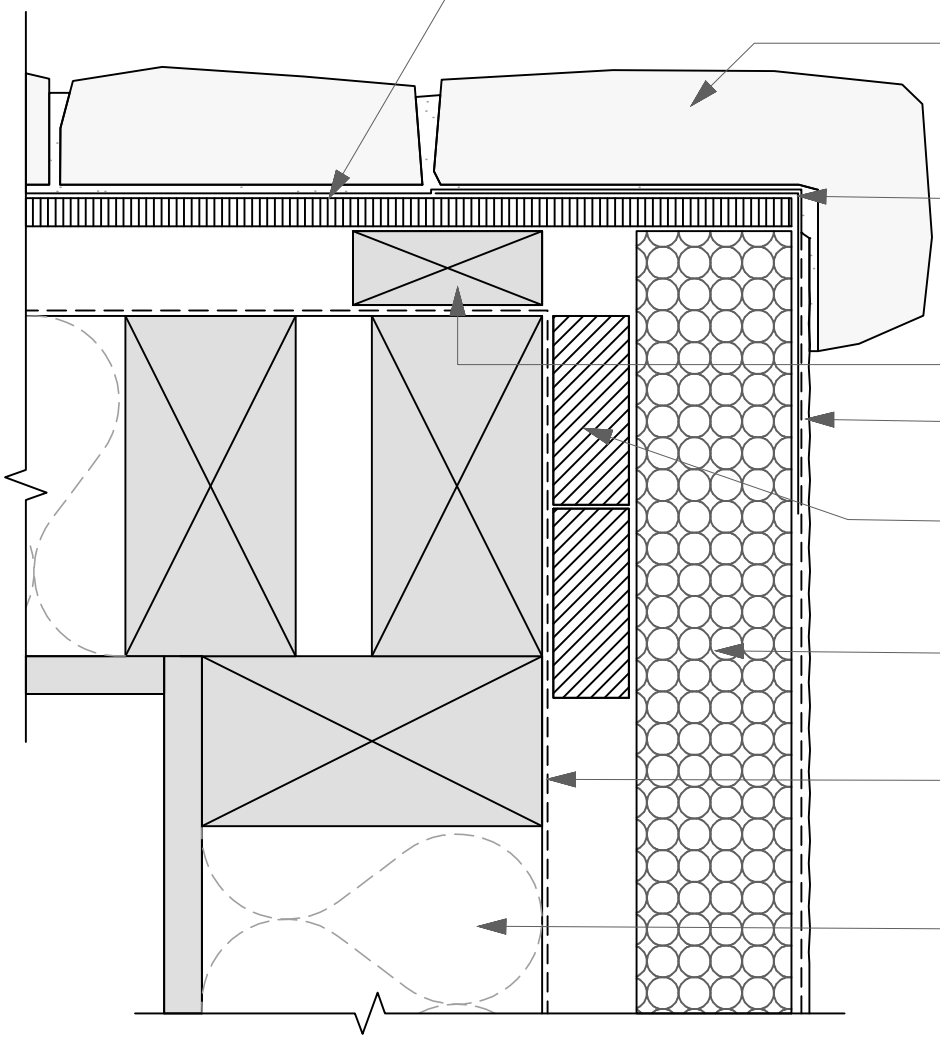

Proprietary artificial stone cladding system with dry cavity

Artificial stone veneer

Layer of 200mm wide Protecto EIFS tape to be adherred 100mm onto Caviteclad substrate and fibre cement backing prior to plastering

Vertical 20mm H3.1 timber batten

Mesh reinforcing and plaster

Double layer of offset vertical 20mm x 50mm ventilated EPS batten

50mm EPS OR 75mm Neopor® EPS

Breather type building wrap continuous around corner as installed by builder

Cavity insulation

04K

SCALE: 1:2

Wall: External Corner - ARTIFICIAL STONE/TILES

CAVITECLAD

© copyright 2013 Specialized Building Products Ltd

All Dimensions to be site checked before construction & installation

28/11/2013

web www.specialized.co.nz