



**VYNCO** LIGHTING

2018/19

**ORDER CODES IN BOLD: WE ENDEAVOUR TO KEEP IN STOCK**

ORDER CODES IN LIGHT: SUBJECT TO AVAILABILITY, MOQS AND LEAD TIMES MAY ALSO APPLY

**IES FILES AVAILABLE ON REQUEST**

*Vynco Industries (NZ) Limited has endeavoured to provide accurate and correct information in this publication.*

*Vynco Industries (NZ) Limited does not accept responsibility for any inadvertent errors or admissions contained in this catalogue, and reserves the right to change specifications and prices at any time without notice.*

*All warranties are voided if fitting is not installed to manufacturer instructions.*

ALL TRADE PRICES LISTED ARE EXCLUDING GST

# VYNCO LIGHTING

2018/19

## LED INTERIOR FITTINGS

	De Niro	6
	McQueen	14
	Jolie	16
<b>Downlights</b>	Streep	18
<b>Oyster</b>	Crawford	20
<b>Panels</b>	Pacino	22
<b>Low Glare Panels</b>	Pacino	22
	Theron	24
<b>Battens</b>	Monroe	26
<b>High Bay</b>	Eastwood	28


## LED EXTERIOR FITTINGS

<b>Up/Down Light</b>	Exoled	32
<b>Floodlights</b>	Stallone	34
<b>Professional Floodlights</b>	Hogan	36
<b>Weatherproof Batten</b>	Connery	38
<b>Slim Weatherproof Batten</b>	Hepburn	40



INTERIOR



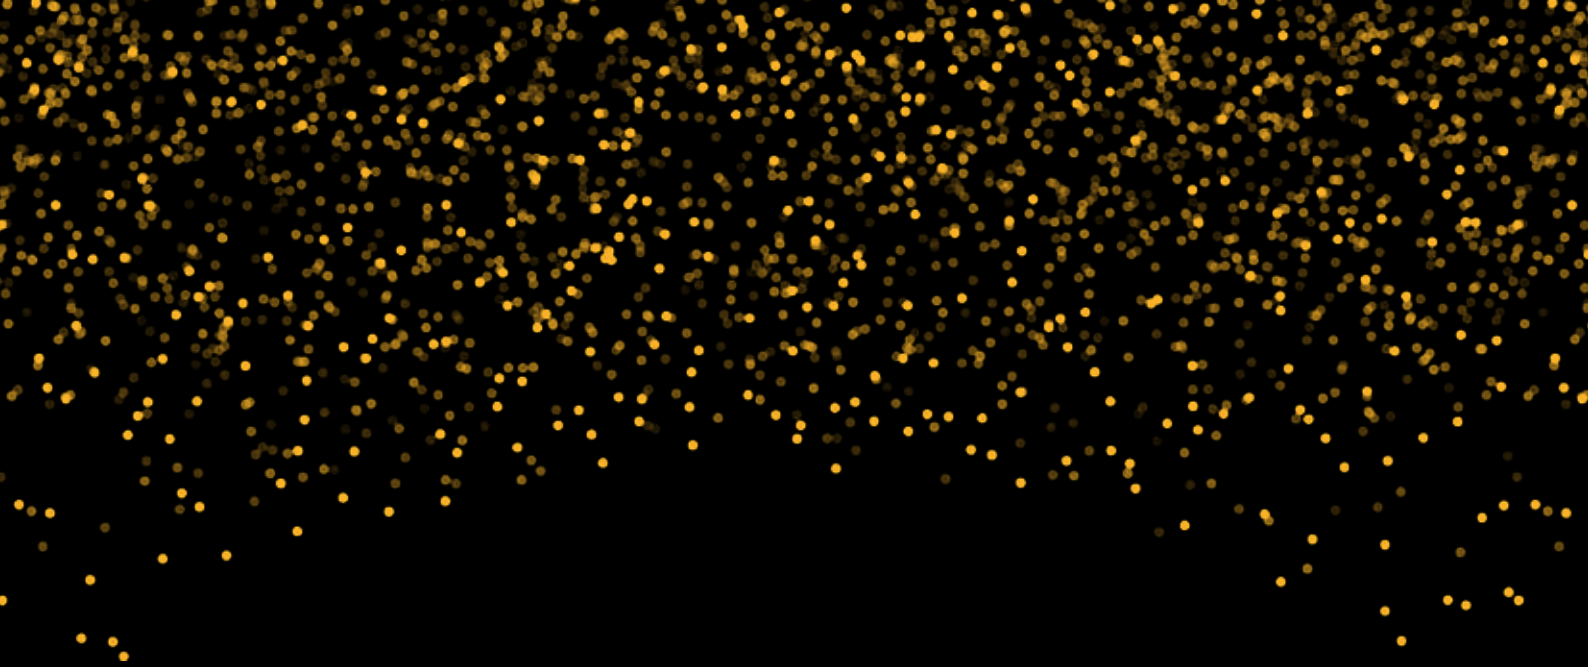


# DE NIRO

NEW-BUILD 90MM LED DOWNLIGHT



# DE NIRO


- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Gimbal adjustment feature to suit angled ceilings, and directional lighting applications – 25° Tilt
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare	Trade Price (\$)
<b>NC3</b>	White	8	700	3000	90 Ø	70-80	UGR<22	62.50
<b>NC4</b>	White	8	730	4000	90 Ø	70-80	UGR<22	62.50
<b>NC3S</b>	Silver	8	700	3000	90 Ø	70-80	UGR<22	62.50
<b>NC4S</b>	Sliver	8	730	4000	90 Ø	70-80	UGR<22	62.50
<b>NC3B</b>	Black	8	700	3000	90 Ø	70-80	UGR<22	62.50
<b>NC4B</b>	Black	8	730	4000	90 Ø	70-80	UGR<22	62.50

High Output units can be made available on request subject to lead time.

Made to order locally, short delays may occur.

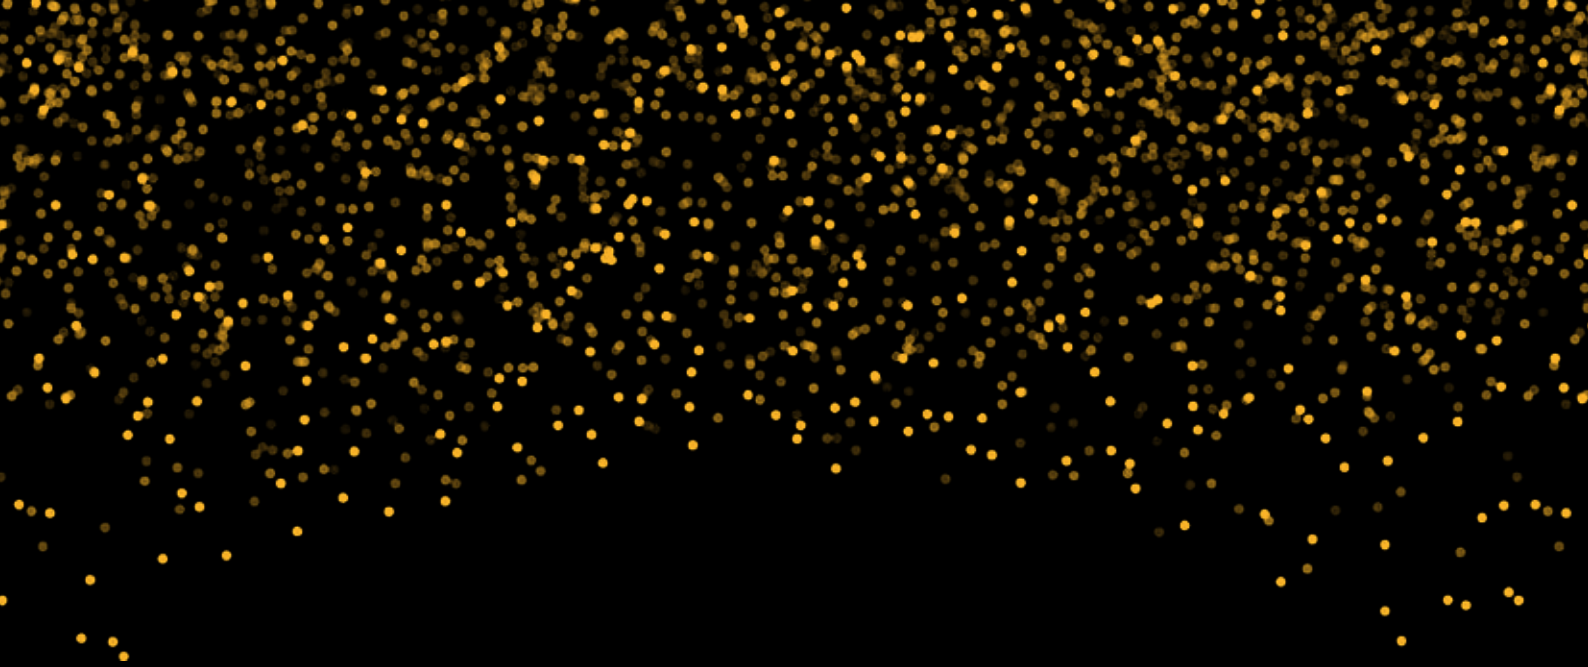

# DE NIRO


RETROFIT 110MM LED DOWNLIGHT






# DE NIRO

- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Gimbal adjustment feature to suit angled ceilings, and directional lighting applications – 25° Tilt
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare	Trade Price (\$)
<b>NR3</b>	Retro White	8	700	3000	110 Ø	70-92	UGR<22	64.20
<b>NR4</b>	Retro White	8	730	4000	110 Ø	70-92	UGR<22	64.20
NR3S*	Retro Silver	8	700	3000	110 Ø	70-92	UGR<22	P.O.A
NR4S*	Retro Silver	8	730	4000	110 Ø	70-92	UGR<22	P.O.A
NR3B*	Retro Black	8	700	3000	110 Ø	70-92	UGR<22	P.O.A
NR4B*	Retro Black	8	730	4000	110 Ø	70-92	UGR<22	P.O.A

High Output units can be made available on request subject to lead time. \*Black and Silver available on request, MOQs may apply and subject to lead time. Made to order locally, short delays may occur.

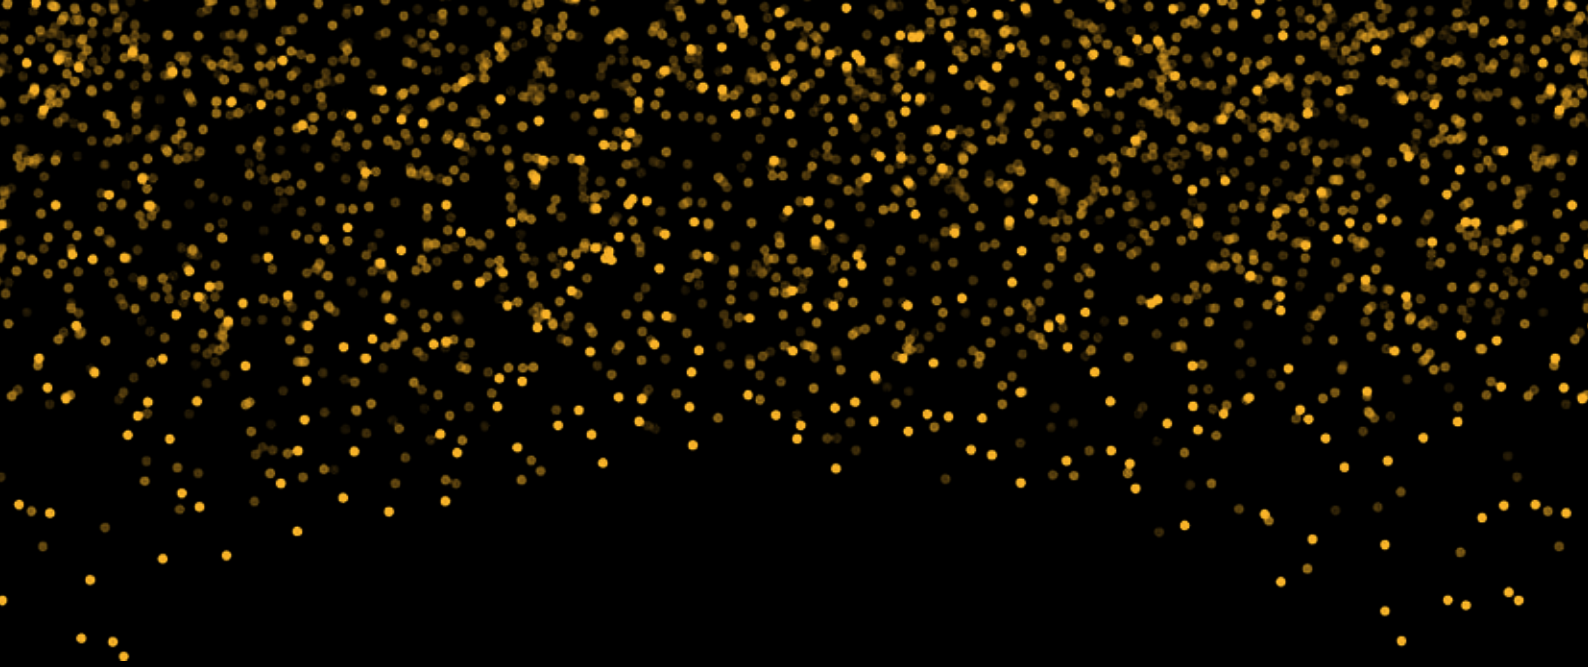

---

# DE NIRO


---

SQUARE LED DOWNLIGHT




# DE NIRO

- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Gimbal adjustment feature to suit angled ceilings, and directional lighting applications – 25° Tilt
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare	Trade Price (\$)
<b>NSQ3</b>	Square White	8	700	3000	110 SQ	92	UGR<22	66.70
<b>NSQ4</b>	Square White	8	730	4000	110 SQ	92	UGR<22	66.70
NSQ3S*	Square Silver	8	700	3000	110 SQ	92	UGR<22	P.O.A
NSQ4S*	Square Silver	8	730	4000	110 SQ	92	UGR<22	P.O.A
NSQ3B*	Square Black	8	700	3000	110 SQ	92	UGR<22	P.O.A
NSQ4B*	Square Black	8	730	4000	110 SQ	92	UGR<22	P.O.A

High Output units can be made available on request subject to lead time. \*Black and Silver available on request, MOQs may apply and subject to lead time. Made to order locally, short delays may occur.

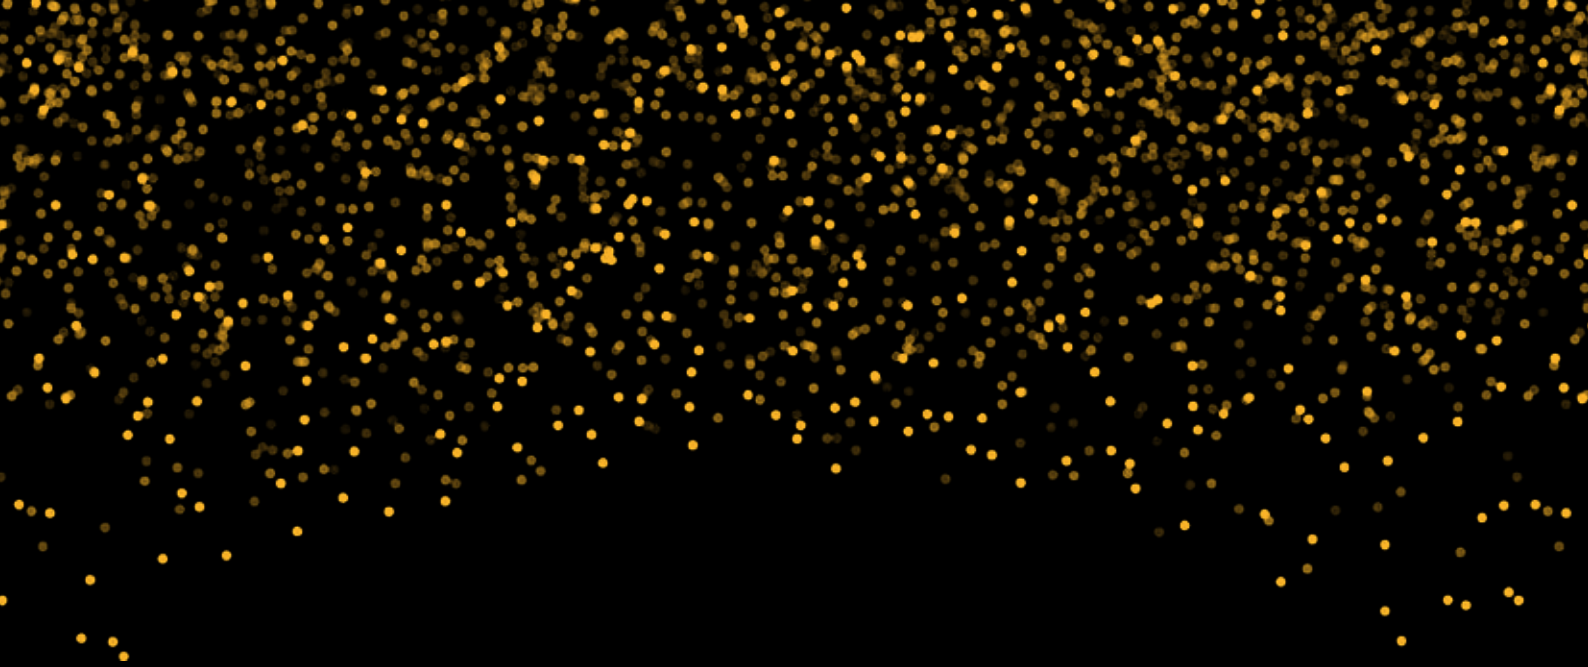


# DE NIRO

LOW GLARE LED DOWNLIGHT




# DE NIRO

- The De Niro range of LED downlights share a uniform bulb and driver set, which twist and click into the different fascia styles
- Low Glare option in the De Niro Range
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare	Trade Price (\$)
<b>NLG3</b>	Low Glare White	8	700	3000	110 Ø	92	UGR<19	83.35
<b>NLG4</b>	Low Glare White	8	730	4000	110 Ø	92	UGR<19	83.35
NLG3S*	Low Glare Silver	8	700	3000	110 Ø	92	UGR<19	P.O.A
NLG4S*	Low Glare Silver	8	730	4000	110 Ø	92	UGR<19	P.O.A
NLG3B*	Low Glare Black	8	700	3000	110 Ø	92	UGR<19	P.O.A
NLG4B*	Low Glare Black	8	730	4000	110 Ø	92	UGR<19	P.O.A

High Output units can be made available on request subject to lead time. \*Black and Silver available on request, MOQs may apply and subject to lead time. Made to order locally, short delays may occur.

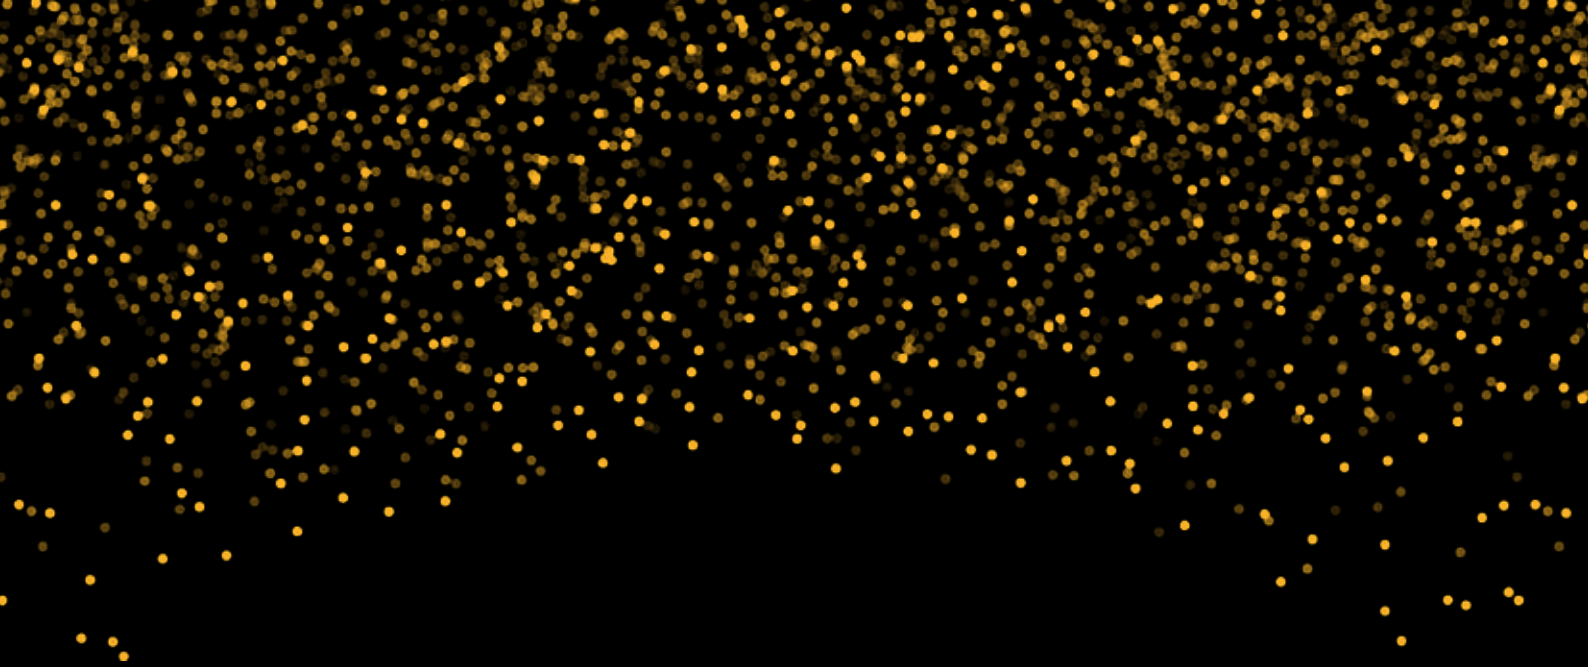

---

# MCQUEEN


---

COLOUR CHANGING LED  
DOWNLIGHT




# MCQUEEN

- The colour temperature can be changed using a toggle switch on the back of the fitting
- The fitting itself is super slim, 32mm profile
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials



Code	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Beam Angle	Trade Price (\$)
<b>M3</b>	8	700	3000	105	90	90	70.95
		720	4000				
		750	6000				
<b>M4</b>	12	900	3000	130	105	100	120.95
		960	4000				
		960	6000				

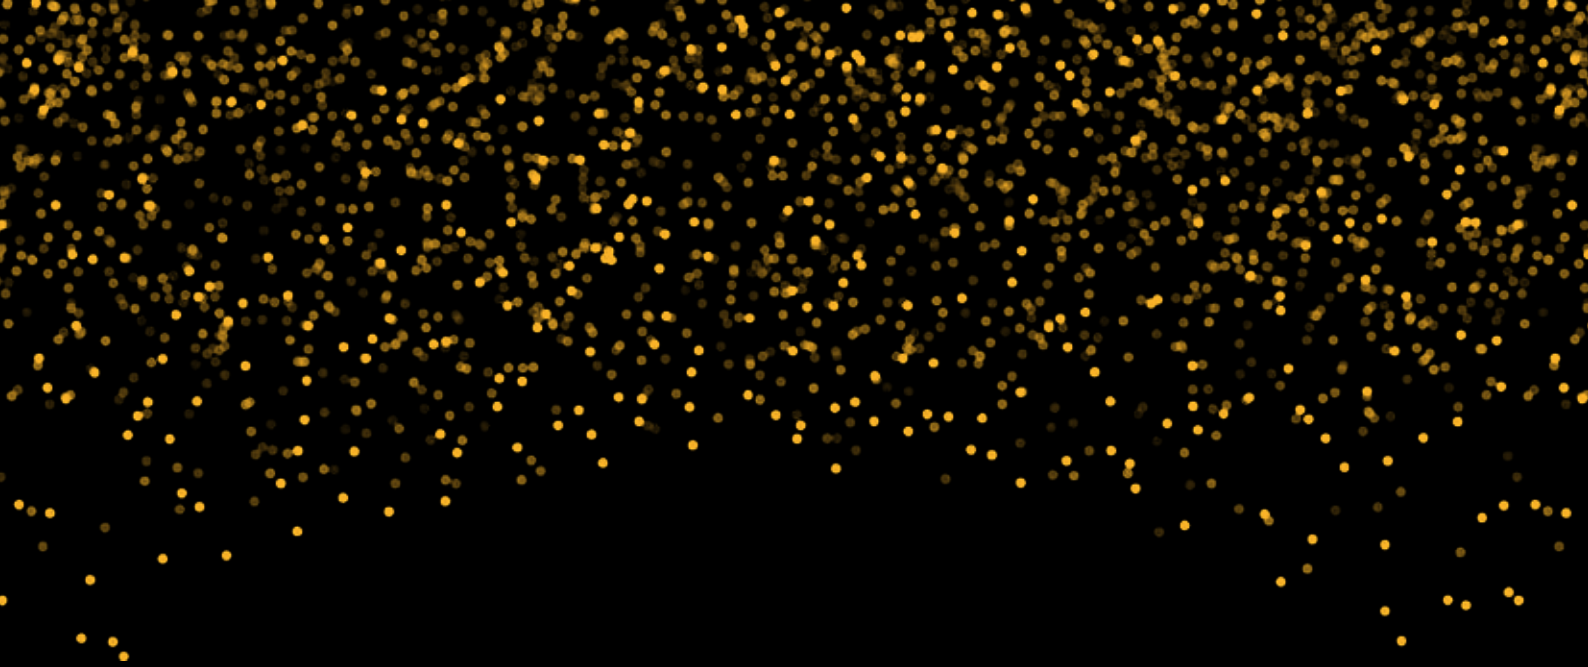

---

# JOLIE

---

COLOUR CHANGE LED  
DOWNLIGHT



IP54  
PROTECTION RATING



DIMMABLE



80  
COLOUR RENDERING




100°  
BEAM ANGLE

3  
YEAR  
WARRANTY



# JOLIE

- Integrated fitting and driver
- Protected against bug/insect entry
- The colour temperature can be changed using a toggle switch on the back of the fitting
- IC-4 & IC-F Rated, can be abutted and covered with approved insulation materials
- Quick Connect terminals
- Driver IP40 Rated, Fascia IP54, suitable for laundries and bathrooms



Code	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Trade Price (\$)
VE3C	8	860	3000	115	90-100	39.00
		870	4000			
		900	5700			



# STREEP

COLOUR CHANGING COMMERCIAL  
LED DOWNLIGHT RANGE



# STREEP

- The colour temperature can be changed using a toggle switch on the back of the fitting
- The 5 inch unit is IC-4 and IC-F Rated, can be abutted and covered with approved insulation materials, the larger sizes cannot
- 50,000 Lifetime hours under normal conditions
- 0°C to +45°C Operating temperature
- DALI or 1-10V Dimming available on request (subject to MOQs)

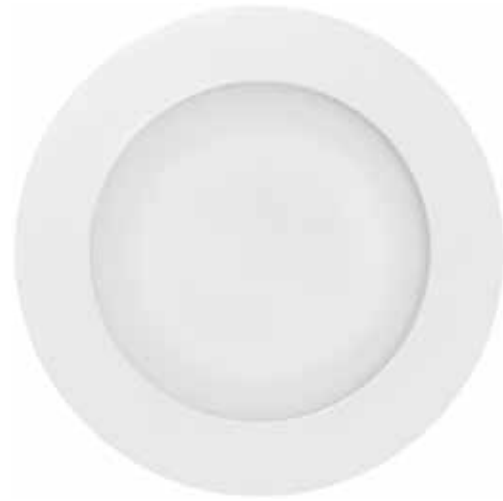

Code	Power (W)	Lumens Output	Colour Temp (k)	Fascia (mm)	Cutout (mm)	Glare	Trade Price (\$)
<b>VM5*</b>	10	1100	3000	140	125	UGR<19	150.00
		1130	4500				
		1160	5700				
<b>VM6</b>	12	1250	3000	165	150	UGR<19	170.00
		1290	4800				
		1330	5700				
<b>VM8</b>	16	1650	3000	193	180	UGR<19	200.00
		1700	4000				
		1750	5700				
<b>VM10</b>	21	<i>Coming Soon!</i>					<i>P.O.A</i>

\*Beam angle 75°.  
Available on request.



---

# CRAWFORD

---

COLOUR CHANGING LED OYSTER



# CRAWFORD

- The colour temperature can be changed using a toggle switch on the back of the fitting
- Operating Temperature -20°C to +45°C
- 50,000 Lifetime hours under normal conditions
- Dimmable
- White gasket used, instead of standard black, so that it cannot be seen through the lens from the front



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimension (mm)	Trade Price (\$)
<b>V0183</b>	18	1760	3000	300 x 52	80.00
		1900	4000		
		1860	5700		
<b>V0253</b>	25	2320	3000	300 x 52	96.70
		2550	4000		
		2450	5700		
<b>V0304</b>	30	2700	3000	400 x 52	113.35
		3000	4000		
		2900	5700		

# PACINO

LED PANELS




# PACINO

- Vynco Panels employ a unique non-prismatic style frosted diffuser
- Material used for diffuser is PMMA (Acrylic) and not traditional PS (Polystyrene) which can discolour with UV exposure
- LEDs are mounted on all four edges
- Thicker, double-side welded frame for added structural strength
- 50,000 Lifetime hours under normal conditions
- 0-10V, Phase dimming options and DALI dimming available on request (subject to MOQs)



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)	Glare	Trade Price (\$)
<b>P664</b>	36	3240	4000	600 x 600	3.5kg	UGR<23	235.00
<b>P666</b>	36	3240	6000	600 x 600	3.5kg	UGR<23	235.00
<b>P1234</b>	36	3240	4000	1200 x 300	3.2kg	UGR<23	250.00
<b>P1236</b>	36	3240	6000	1200 x 300	3.2kg	UGR<23	250.00
<b>P1264</b>	72	6480	4000	1200 x 600	6.2kg	UGR<23	535.00
<b>P1266</b>	72	6480	6000	1200 x 600	6.2kg	UGR<23	535.00
<b>P664L</b>	36	2920	4000	600 x 600	3.5kg	UGR<19	380.00
<b>P666L</b>	36	2920	6000	600 x 600	3.5kg	UGR<19	380.00
<b>P1234L</b>	36	2920	4000	1200 x 300	3.2kg	UGR<19	400.00
<b>P1236L</b>	36	2920	6000	1200 x 300	3.2kg	UGR<19	400.00
<b>P1264L</b>	72	5830	4000	1200 x 600	6.2kg	UGR<19	625.00
<b>P1266L</b>	72	5830	6000	1200 x 600	6.2kg	UGR<19	625.00

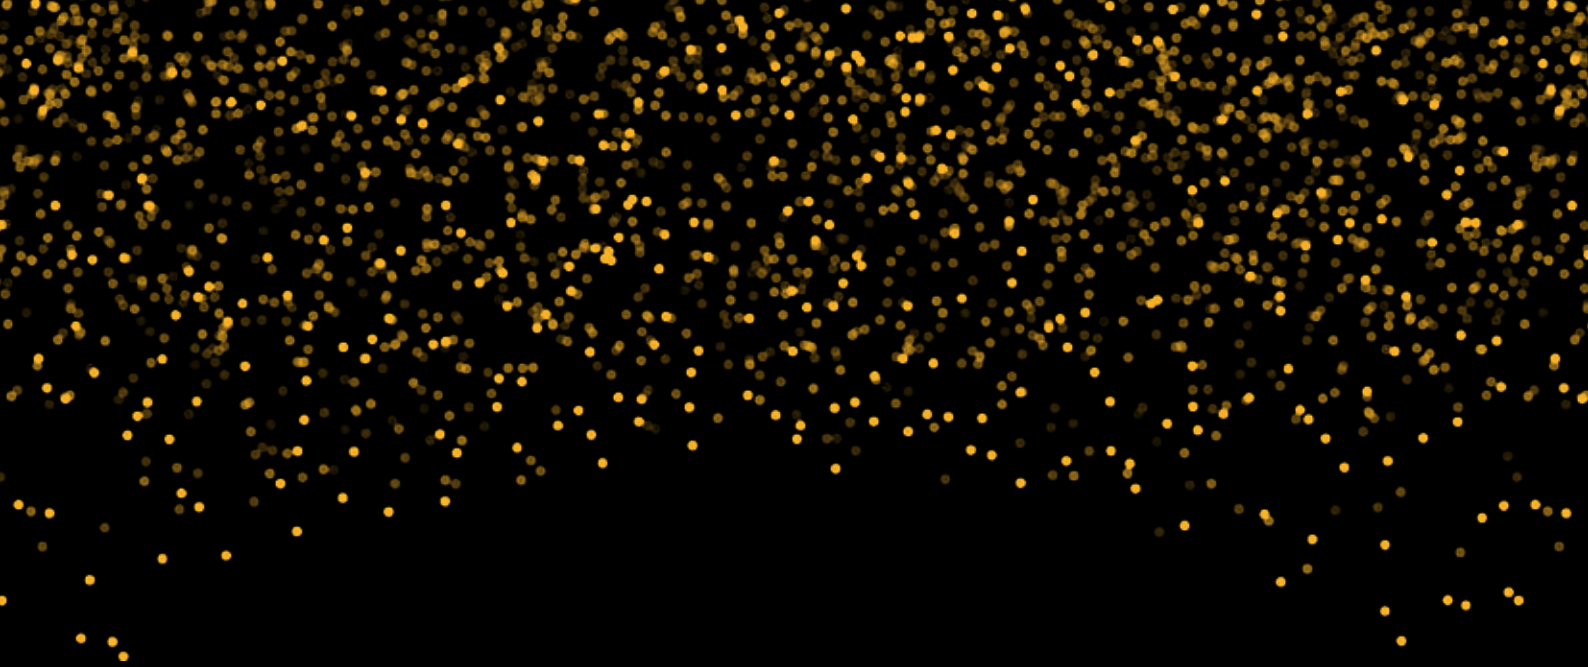

---

---

# THERON

---

---

LED BATTENS






# THERON

- Extruded aluminium body and base with opaque Polycarbonate Lens
- Reflector assembly designed to simply plug into driver and clip to base without the use of tools
- Easy install base
- Centre mains entry
- 50,000 Lifetime hours under normal conditions
- Operating Temperature -20°C to +45°C



Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions	Glare	Trade Price (\$)
<b>BT154</b>	White	50	6000lm	4000	1500 x 102 x 83	UGR >19	155.00

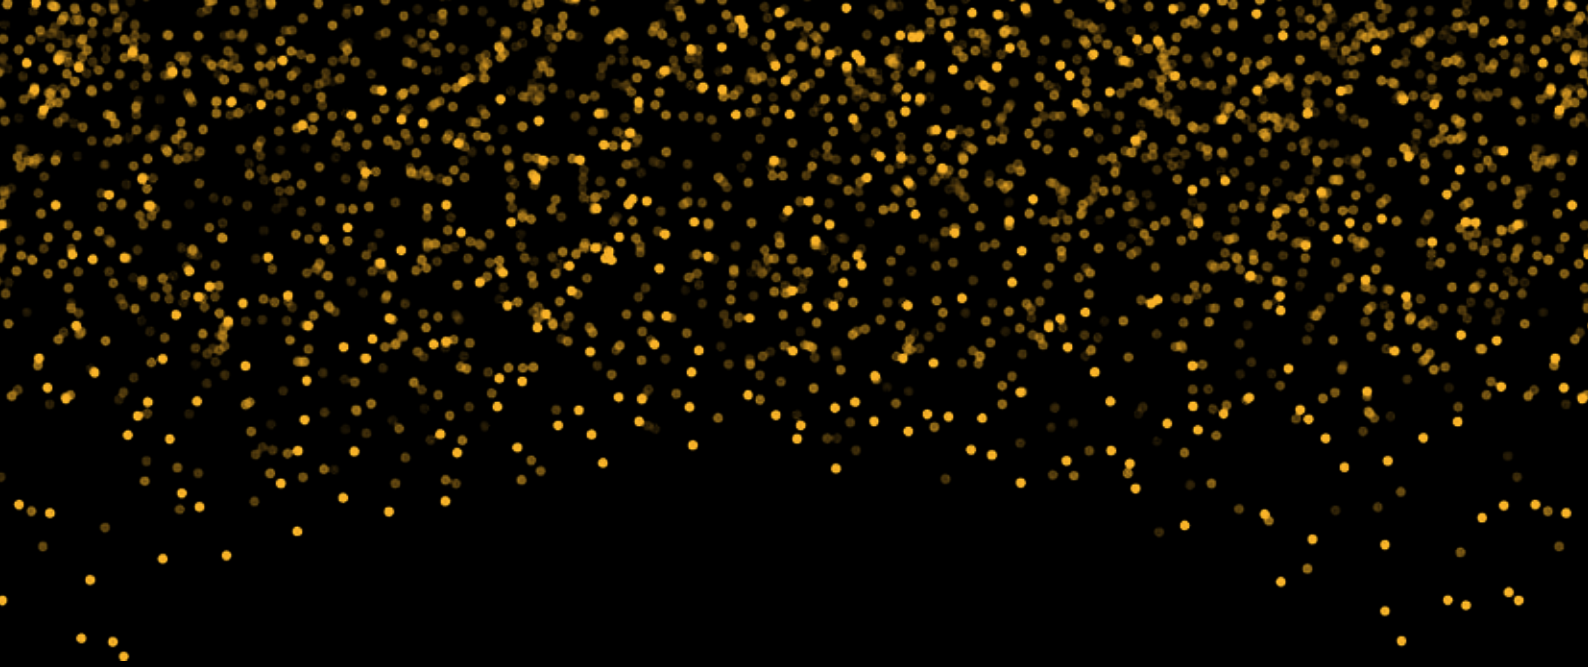

---

# MONROE

---

LED BATTENS



# MONROE

- Osram Driver, Epistar LED Chip
- Polycarbonate Diffuser
- Wide body helps to cover existing ceiling damage from previous fittings
- Emergency and Sensing options available
- Sensor unit spec: 360° detection angle, 1-8m Detection range, Time setting range: 10 sec – 10 min, Light control: 10-2000 Lux
- Emergency unit spec: 3 Hour Emergency Operation, Recharge time: 20 Hours, Intelligent automatic recharge function, Test switch with self-test function



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Glare	Trade Price (\$)
<b>B1224</b>	50	5000	4000	1200 x 200 x 68	UGR<23	191.75
<b>B1524</b>	70	7000	4000	1500 x 200 x 68	UGR<23	233.35

Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Trade Price (\$)
<b>B1224E</b>	Emergency Batten	50	1000	4000	1200 x 200 x 68	458.50
<b>B1224S</b>	Sensing Batten	50	5000	4000	1200 x 200 x 68	275.00
<b>B1224ES</b>	Emergency & Sensing Batten	50	1000	4000	1200 x 200 x 68	600.00
<b>B1524E</b>	Emergency Batten	70	1400	4000	1500 x 200 x 68	491.50
<b>B1524S</b>	Sensing Batten	70	7000	4000	1500 x 200 x 68	308.50
<b>B1524ES</b>	Emergency & Sensing Batten	70	1400	4000	1500 x 200 x 68	633.35

Made to order locally, short delays may occur.



---

# EASTWOOD

---

HIGH BAY




# EASTWOOD

- 120 Lumens per Watt efficacy
- 50,000Hr lifespan under normal conditions
- Acrylic Lens (not glass), can be used in supermarkets and other food related spaces.
- 1.5m flex and plug
- Lumiled 3030 LED Chip, Meanwell Driver
- Operating Temperature -40°C to +50°C
- Chain not included



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)	Trade Price (\$)
<b>HB1505</b>	150	18,000	5000	320 Ø x 189 H	5.6	335.00
<b>HB2005</b>	200	24,000	5000	320 Ø x 189 H	6.2	417.00

Sensor options available on request. MOQs may apply.

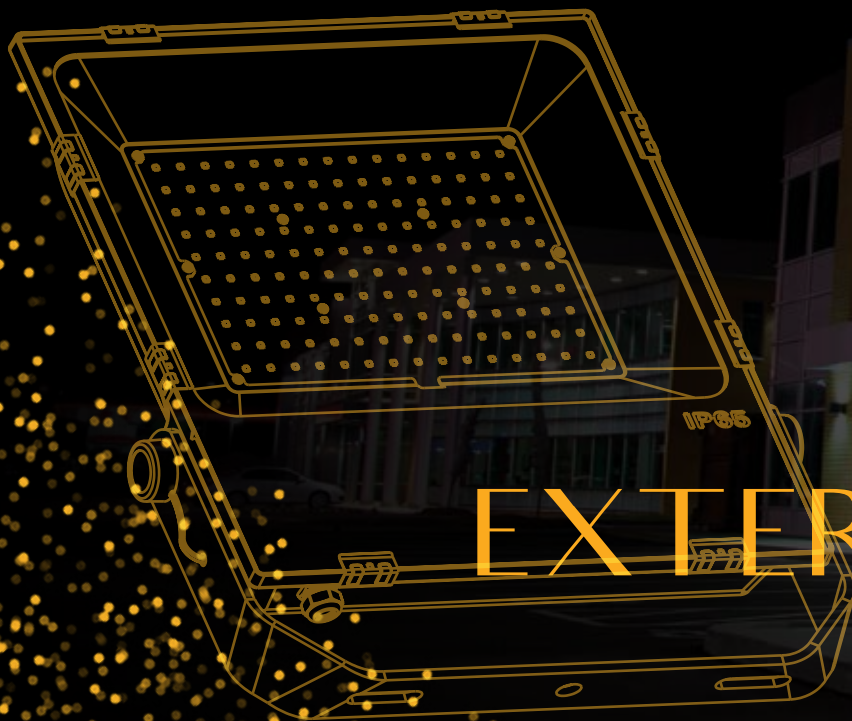


# EXTERIOR







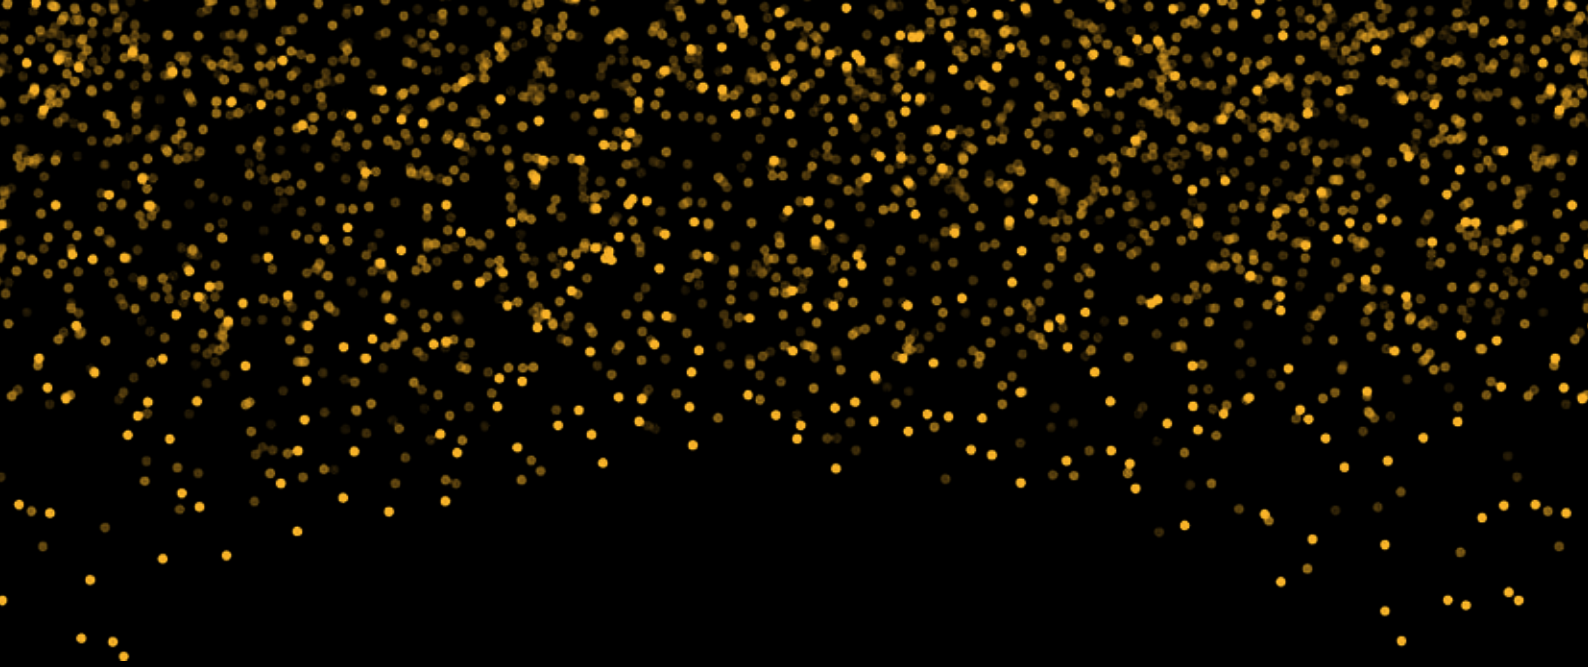

---

---

# EXOLED

---

---

LED UP/DOWN LIGHT






# EXOLED

- 316 Marine Grade Stainless Steel, suitable for outdoor use, even in locations close to the ocean
- Outlasted several competitor units in a salt spray test
- Choose the Spot fitting for adjustable directional lighting



Code	Type	Power (W)	Lumens Output	Dimensions (mm)	Finish	Trade Price (\$)
<b>VE3WUD</b>	Up & Down	2x 3W LED	520	63 x 142 x 94	316 Stainless Steel	156.40
<b>VE3WS</b>	Spot	3W LED	240	63 x 63 x 148 (when straight)	316 Stainless Steel	147.90
<b>VE3WF</b>	Fixed	3W LED	240	63 x 83 x 94	316 Stainless Steel	139.50

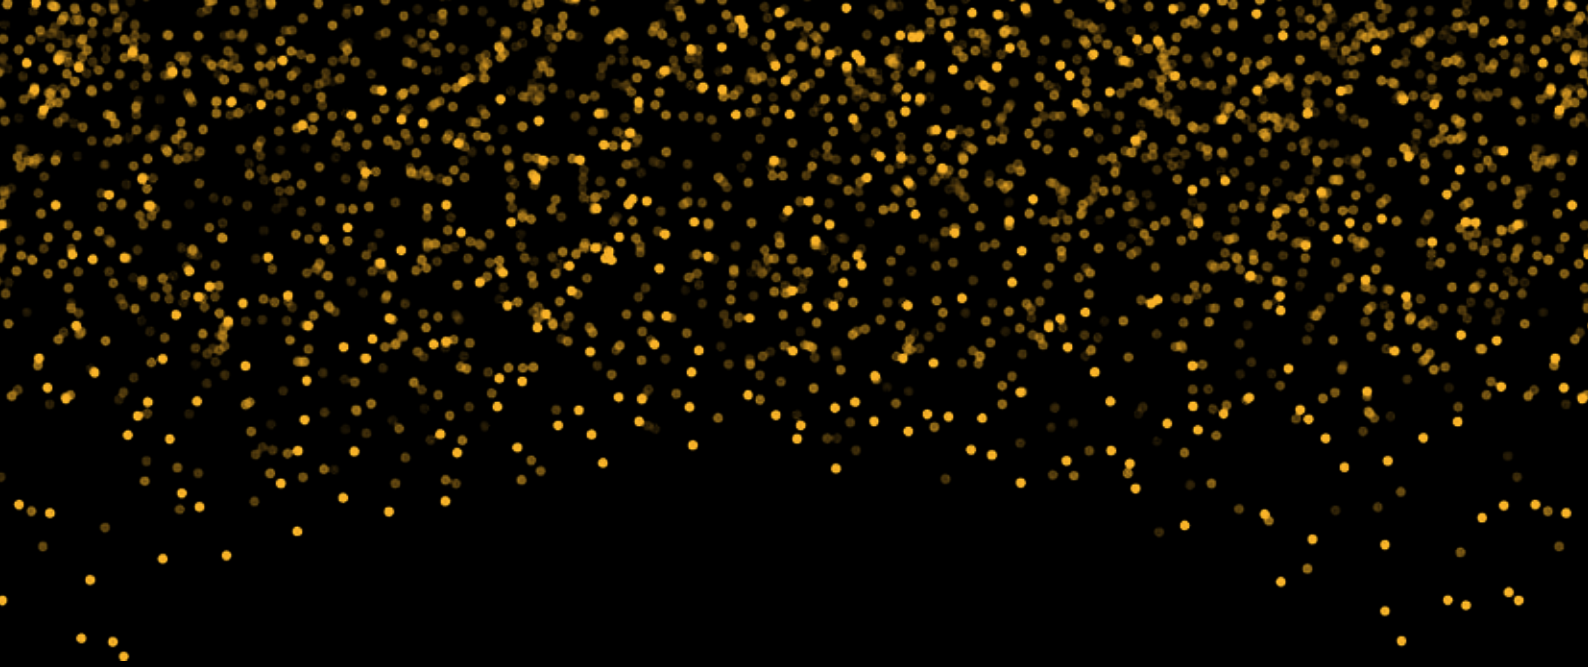

---

# STALLONE

---

LED FLOODLIGHT



# STALLONE

- 50,000 Lifetime hours under normal conditions
- Up to 110 Lumens per Watt
- 270° hinge rotation
- Meanwell driver and Osram chip
- Operating temp range: -40°C to +50°C
- 1 meter long lead



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)	Colour	Trade Price (\$)
<b>F105</b>	10	1,000	5000	166 x 107 x 32	0.6kg	Black	75.00
<b>F305</b>	30	3,000	5000	226.5 x 167 x 40	1.4kg	Black	145.00
<b>F505</b>	50	5,000	5000	310.5 x 220 x 47.5	2.1kg	Black	208.50
<b>F1005</b>	100	11,000	5000	402.5 x 295 x 53.5	5.1kg	Black	550.00
<b>F1505</b>	150	16,500	5000	430.5 x 330 x 53.5	6.2kg	Black	625.00
<b>F2005</b>	200	22,000	5000	470.5 x 360 x 53.5	7.1kg	Black	750.00



---

# HOGAN

---

PROFESSIONAL LED FLOODLIGHT




# HOGAN

- 50,000 Lifetime hours under normal conditions
- 110 Lumens per Watt
- Osram LED Chips and Meanwell Driver
- Working temperature -40°C to +45°C
- Available in 4000k-7000k, with 6 rectangle beam angle options – inquire today to discuss your project requirements (Codes below refer only to 5000k versions at 65x135° beam angles)
- Protective UV stabilised powder coated finish aluminium body, tempered glass optical cover
- Designed for sports, site and area applications such as: Class I, II & III outdoor sports fields and courts, indoor arenas, signage and billboards, ports and depots, building facades, and all heavy industrial and wet locations



Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Weight (kg)	Colour	Trade Price (\$)
FP2005	200	25,300	5000	507 x 367 x 244	8.8	Black	P.O.A
FP2505	250	31,050	5000	567 x 367 x 244	12	Black	P.O.A
FP3005	300	37,950	5000	567 x 367 x 244	12.5	Black	P.O.A
FP3505	350	42,550	5000	533 x 621 x 384	18.5	Black	P.O.A
FP4005	400	50,600	5000	533 x 621 x 384	19.5	Black	P.O.A
FP5005	500	63,250	5000	593 x 621 x 384	20	Black	P.O.A
FP6005	600	71,300	5000	593 x 621 x 384	22	Black	P.O.A
FP8005	800	101,200	5000	833 x 621 x 384	29	Black	P.O.A
FP10005	1000	126,500	5000	723 x 724 x 478	30	Black	P.O.A

PROJECT ITEM: Other Colour Temperatures, fitting colours and beam angles available to order, please inquire for further information. Subject to MOQs.

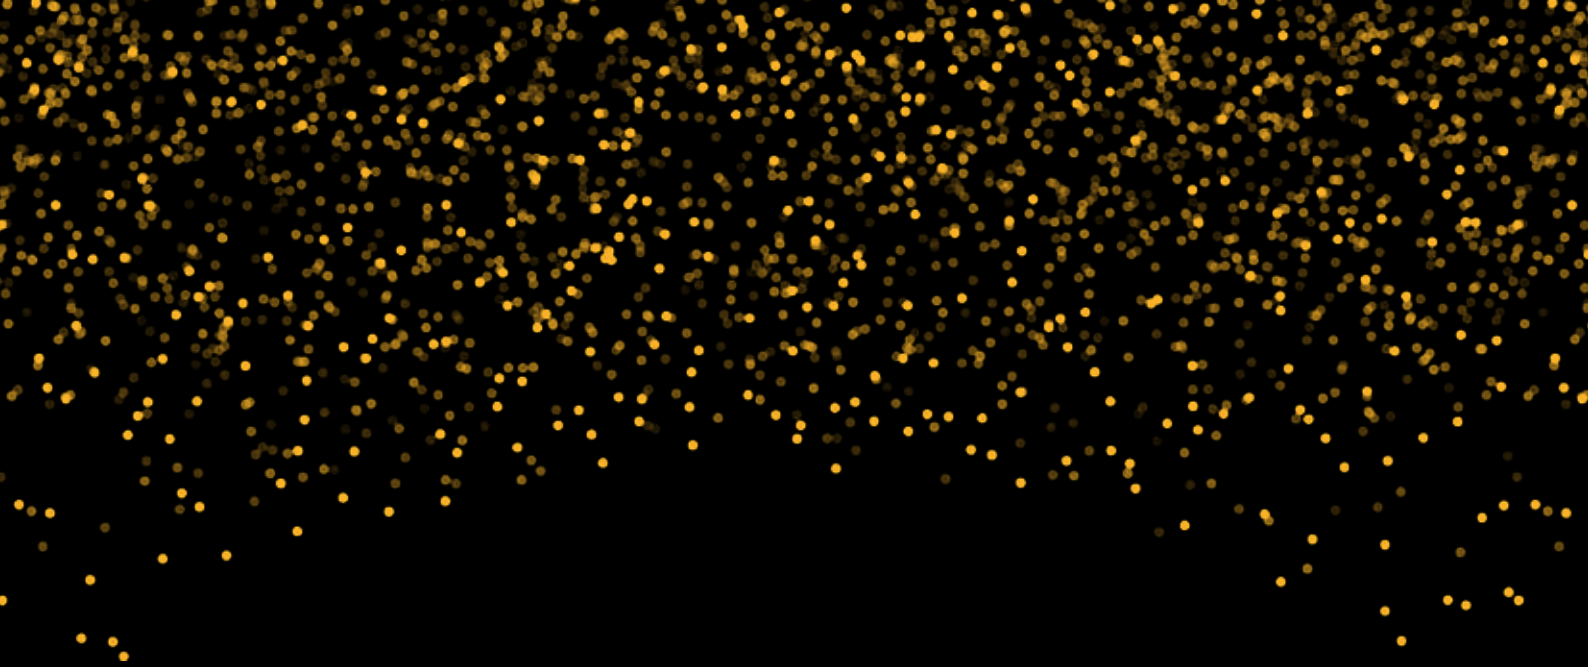

---

# CONNERY


---

WEATHERPROOF LED UNDER VERANDA



# CONNERY


- Operating Temperature -20°C to +35°C
- ABS Body and Polycarbonate Diffuser – 105mm H x 158mm W
- Emergency and Sensing options available
- Sensor unit spec: 360° detection angle, 1-8m Detection range, Time setting range: 10 sec – 10 min, Light control: 10-2000 Lux
- Emergency unit spec: 3 Hour Emergency Operation, Recharge time: 20 Hours, Intelligent automatic recharge function, Test switch with self-test function
- 50,000 Lifetime hours under normal conditions

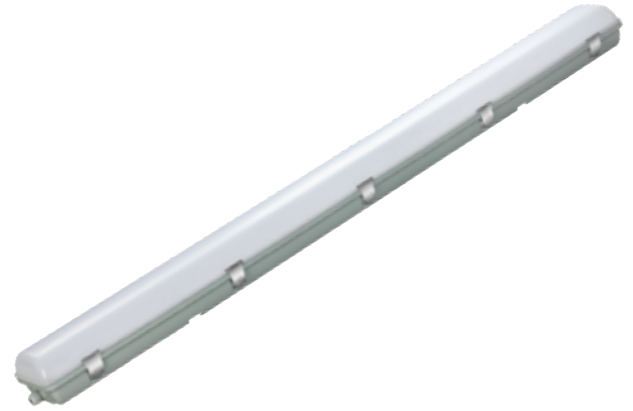

Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Trade Price (\$)
<b>VU2</b>	28	2500	4000	658 x 158	71.50
<b>VU4</b>	56	5000	4000	1268 x 158	149.77
<b>VU5</b>	70	6300	4000	1568 x 158	179.77
<b>VU56</b>	70	6300	6500	1568 x 158	179.77

Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Trade Price (\$)
<b>VU4E</b>	Emergency	56	720	4000	1268 x 158	441.70
<b>VU4S</b>	Sensing	56	3600	4000	1268 x 158	260.00
<b>VU4ES</b>	Emergency & Sensing	56	720	4000	1268 x 158	P.O.A
<b>VU5E</b>	Emergency	70	1025	4000	1568 x 158	492.00
<b>VU5S</b>	Sensing	70	5120	4000	1568 x 158	266.75
<b>VU5ES</b>	Emergency & Sensing	70	1025	4000	1568 x 158	P.O.A
<b>VU56E</b>	Emergency	70	1060	6500	1568 x 158	492.00
<b>VU56S</b>	Sensing	70	5300	6500	1568 x 158	266.75
<b>VU56ES</b>	Emergency & Sensing	70	1060	6500	1568 x 158	P.O.A

Made to order locally, short delays may occur.

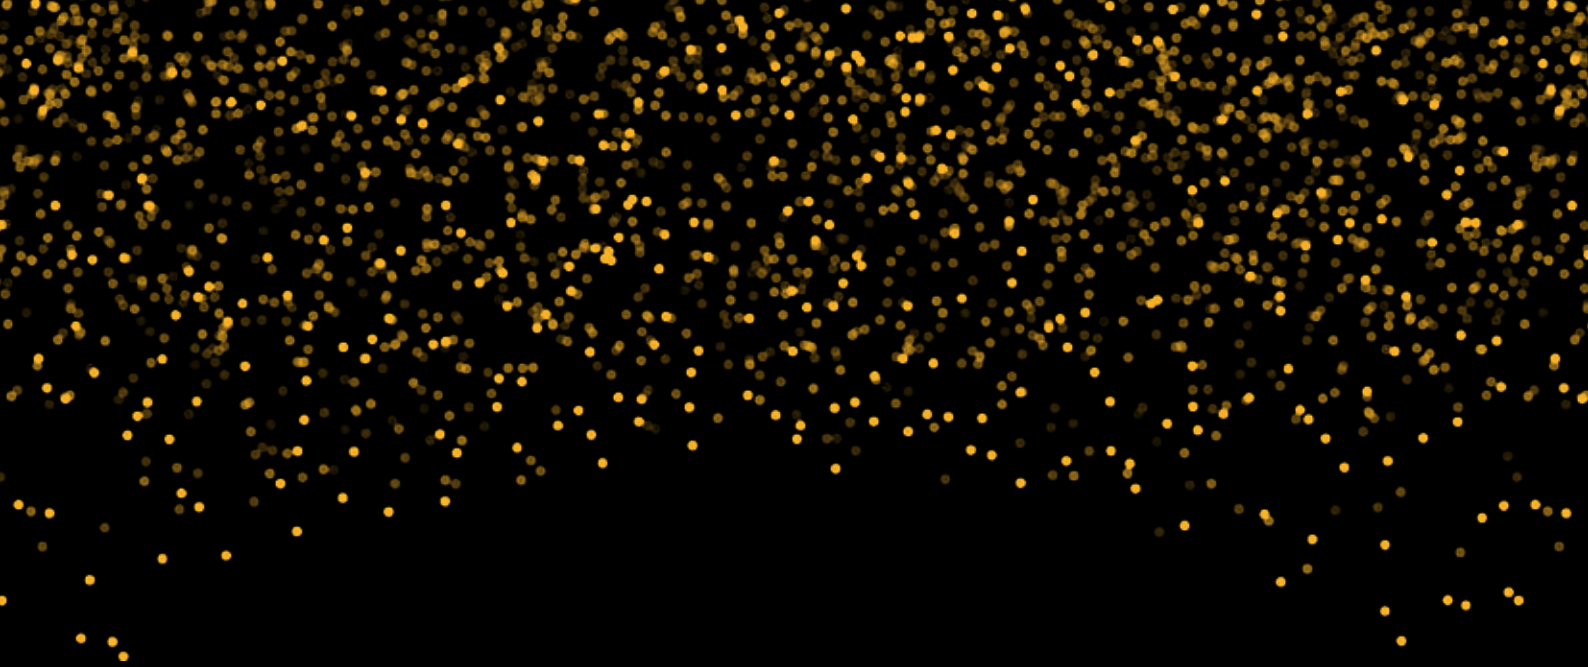

---

---

# HEPBURN

---

---

SLIM WEATHERPROOF LED  
UNDER VERANDA






# HEPBURN

- Slim body version of the Connery, body width is 100mm, height is 70mm
- Operating Temperature -20°C to +45°C
- ABS Body and Polycarbonate Diffuser
- 0.5 Second Quick Start
- 40,000 Lifetime hours under normal conditions
- Includes Stainless Steel brackets



Hepburn



Connery

Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Trade Price (\$)
VUS5	70	6000	4000	1500 x 100	140.00
VUS56	70	6000	6500	1500 x 100	140.00

# CONTACT US

## Vynco Industries NZ Limited

### AUCKLAND OFFICE

9 Levene Place, Mt Wellington, Auckland 1060  
PO Box 12 249, Penrose, Auckland 1642  
New Zealand

**P** +64 9 525 6051 **F** +64 9 525 5799

**E** [vyncoauck@vynco.co.nz](mailto:vyncoauck@vynco.co.nz)

### CHRISTCHURCH OFFICE

388 - 396 Tuam Street, Philipstown, Christchurch 8011  
PO Box 9022, Tower Junction, Christchurch 8149  
New Zealand

**P** +64 3 379 9283 **F** +64 3 379 6838

**E** [chchsales@vynco.co.nz](mailto:chchsales@vynco.co.nz)

*Stock is available for pick up from the above locations at your convenience.*

---



fb/vyncoindustriesltd

 [www.vynco.co.nz](http://www.vynco.co.nz)

