

# MANROSE PRO-SERIES WALL/CEILING MOUNTED FANS

## XFLP LOW PROFILE MODELS

### SQUARE MODELS

Duct Size	Model.	Switching Method	Performance	Order Code
125mm	XFLP125SS	Standard	36 l/s, 130m <sup>3</sup> /hr	FAN0589
125mm	XFLP125ST	Timer	36 l/s, 130m <sup>3</sup> /hr	FAN0590
150mm	XFLP150SS	Standard	101 l/s, 364m <sup>3</sup> /hr	FAN0594
150mm	XFLP150ST	Timer	101 l/s, 364m <sup>3</sup> /hr	FAN0595



Square Model

### CIRCULAR MODELS

Duct Size	Model	Switching Method	Performance	Order Code
125mm	XFLP125CS	Standard	36 l/s, 130m <sup>3</sup> /hr	FAN0604
125mm	XFLP125CT	Timer	36 l/s, 130m <sup>3</sup> /hr	FAN0605
150mm	XFLP150CS	Standard	101 l/s, 364m <sup>3</sup> /hr	FAN0609
150mm	XFLP150CT	Timer	101 l/s, 364m <sup>3</sup> /hr	FAN0610



Circular Model

### SAFETY EXTRA LOW VOLTAGE (SELV) MODELS

Duct Size	Model	Switching Method	Performance	Order Code
125mm	XFLP125SLV	Standard	36 l/s, 130m <sup>3</sup> /hr	FAN5886
125mm	XFLP125CLV	Standard	36 l/s, 130m <sup>3</sup> /hr	FAN5885
150mm	XFLP150SLV	Standard	101 l/s, 364m <sup>3</sup> /hr	FAN5892
150mm	XFLP150CLV	Standard	101 l/s, 364m <sup>3</sup> /hr	FAN5891



SELV Model

12VAC transformer included and suitable for installation in damp areas, zones 1, 2 and 3.

### ACCESSORIES

Duct Size	Square Fascia	Order Code	Duct Size	Circular Fascia	Order Code
125mm	Satin Silver Fascia	FAN2068	125mm	Satin Silver Fascia	FAN2069
125mm	Chrome Fascia	FAN0755	125mm	Chrome Fascia	FAN0757
125mm	White Fascia	FAN0747	125mm	White Fascia	FAN0748
150mm	Satin Silver Fascia	FAN2071	150mm	Satin Silver Fascia	FAN2070
150mm	Chrome Fascia	FAN0598	150mm	Chrome Fascia	FAN0613
150mm	White Fascia	FAN0749	150mm	White Fascia	FAN0750



Satin Silver / Chrome Fascia

- Unique low profile design enables these fans to be installed unobtrusively into any wall or ceiling.
- These axial fans have ball bearing motors to prolong the life of the motor.
- Supported by a 5 year warranty.

#### Switching Options

1. Standard - Operates from remote switch (not supplied).
2. Timer - Fan operates from a switch and continues to run for a preset time after switching off - adjustable 1-20 minutes.

Requires three wires: permanent phase, switched phase, neutral.



**NOTE: All fan flow rates quoted are free air delivery.**

## GENERAL INFORMATION

Model	Circular Cut-Out Size
XFLP125S	140mm - Using gib fixing clips supplied/included
XFLP125C	140mm - Using gib fixing clips supplied/included
XFLP150S	173mm - Using gib fixing clips supplied/included
XFLP150C	173mm - Using gib fixing clips supplied/included

## DIMENSION INFORMATION (MM)


Model	A	B	C	D
XFLP125S	161	122	10	118
XFLP125C	165	122	10	118
XFLP150S	191	122	10	150
XFLP150C	198	122	10	150




Dimensions - XFLP

## TECHNICAL SPECIFICATION & PERFORMANCE DATA

Model	XFLP125	XFLP150
Power	220 - 240V (SELV models 12V)	220 - 240V (SELV models 12V)
Fan Performance	36 l/s, 130m <sup>3</sup> /hr	101 l/s, 364m <sup>3</sup> /hr
Fan Wattage	20W	25W
Maximum Pressure	35 Pa	60 Pa
Fan Speed	2000 RPM	2400 RPM
Sound Level	41 dB(A)	40 dB(A)
Max. Operating Temp	50°C	50°C
IP Rating	IPX4	IPX4

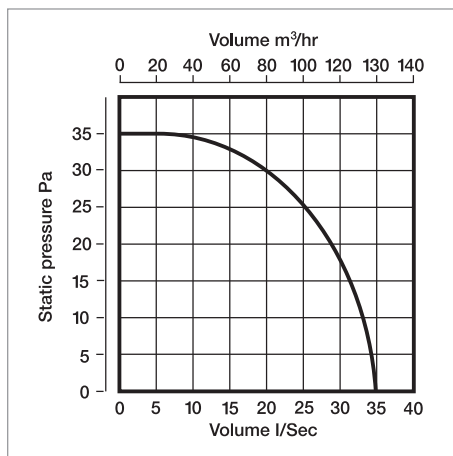

Performance - XFLP125

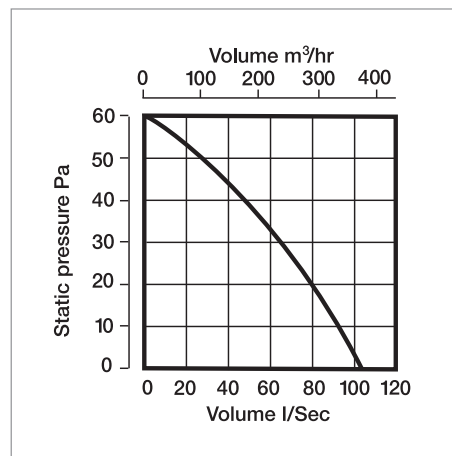

Performance - XFLP150