

# ArmstrongFlooring™



AUSTRALIAN MADE®

## Natralis® Collection

*Homogeneous Vinyl Sheet*

Wallaroo | 5R502121  
Wattle | 5R502281



# Natralis® Collection

## Homogeneous Vinyl Sheet

The Natralis® Collection is a high-quality, Australian made commercial vinyl sheet flooring, inspired by the country's natural beauty. Natralis® captures the essence of Australia's landscapes and wildlife, offering authentic and vibrant designs. Play with colour, connect with place®.

The collection features Natralis® and Natralis® Foothold, tailored for various environments including healthcare, aged care, education, hospitality, and commercial settings. Designed to maintain colour continuity across wet and dry areas, Natralis® meets specific performance standards for each application.

For a customised flooring solution, our Infinity® range uses the Natralis® formulation to develop a bespoke colourway to create a space to work within your design scheme and bring your project to life.

## Features & Benefits



**LOW MAINTENANCE**  
PUR coating makes it easy to clean and maintain



**HIGH FOOT TRAFFIC**  
Designed to withstand areas with high traffic flow^



**HIGHLY DURABLE**  
Superior even wear for a consistent appearance




**HYGIENIC SURFACE**  
Helps prevent mould and bacteria growth




**SLIP RESISTANT**  
Reduce slips to create a safer environment\*



**WET BAREFOOT**  
Suitable for shower areas to provide slip resistance\*



**LOW VOC**  
Ideal for those with allergies and chemical sensitivities



**PHTHALATE FREE**  
Made without phthalates for a healthier environment

^Natralis \*Natralis Foothold






Natralis®

## Wattle & Stringy Bark

Wattle was inspired by its sunny and understated vibrancy. Stringy Bark reflects the Eucalyptus tree's fibrous bark.

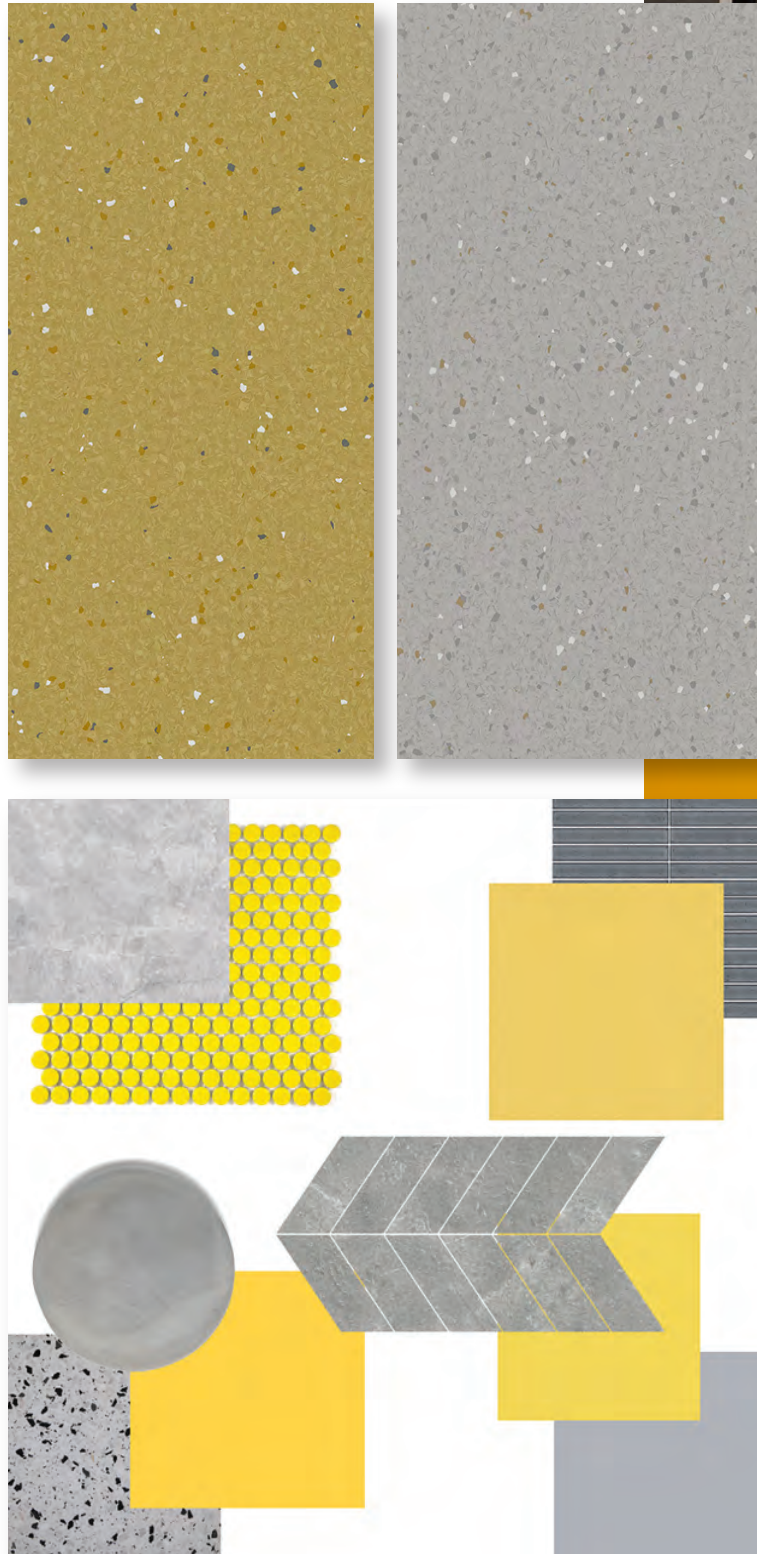


*Quarters Primary School*



## Ningaloo

Inspired by the world's largest fringing reef, Ningaloo is the Aboriginal Wajarri language word meaning 'Deepwater'.

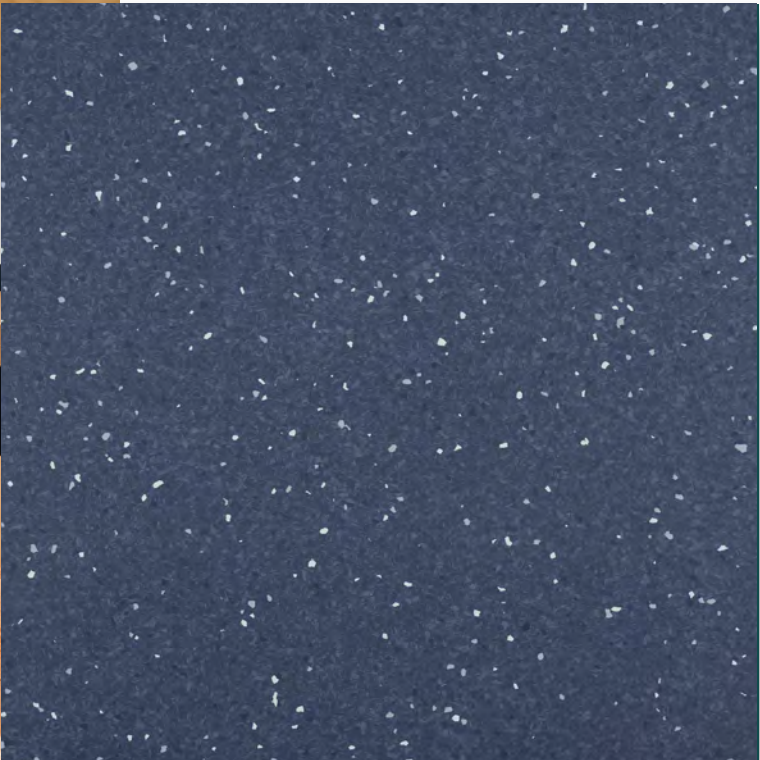




Natralis®

Quokka

Quokka features greyish brown tones and buff undertones to represent the coarse fur of this herbivorous marsupial.

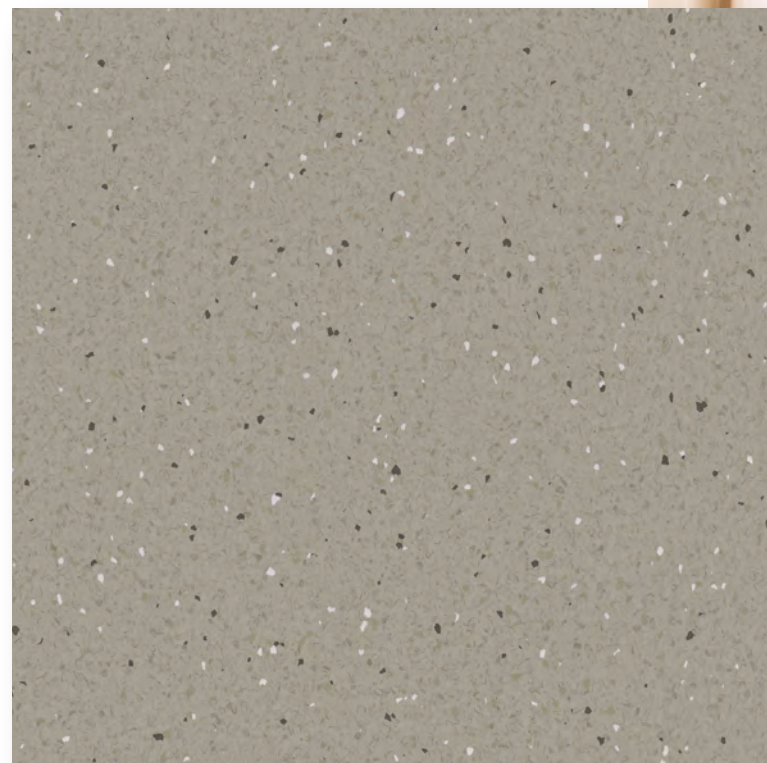



# Natralis® Collection

*Colour Palette*

Roll size: 2.0mm x 1.83m x 20m




**Saltbush** | 5R502241  
Foothold | 5R522241

LRV 58.28



**Clovelly Beach** | 5R502271  
Foothold | 5R522271

LRV 55.58

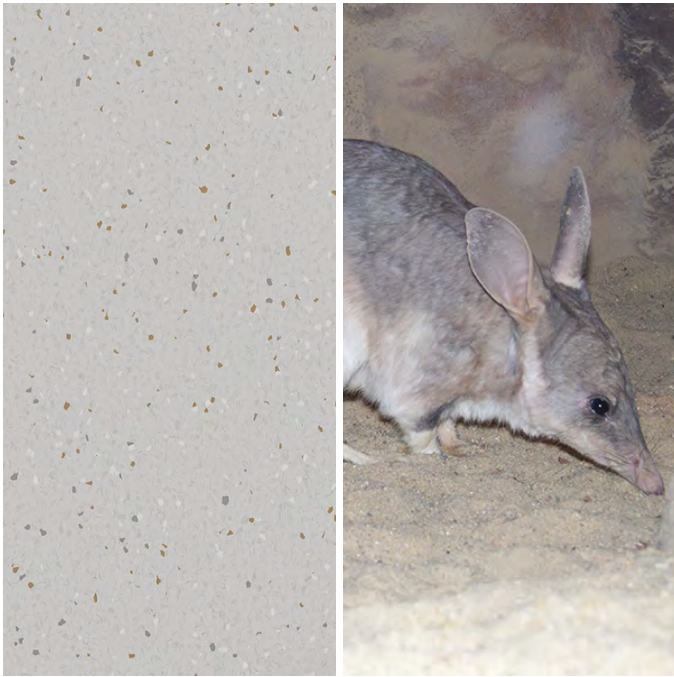

**Bilby** | 5R502211  
Foothold | 5R522211

LRV 62.54




**Wallaroo** | 5R502121  
Foothold | 5R522121

LRV 48.21



**Stringy Bark** | 5R502221  
Foothold | 5R522221

LRV 44.16

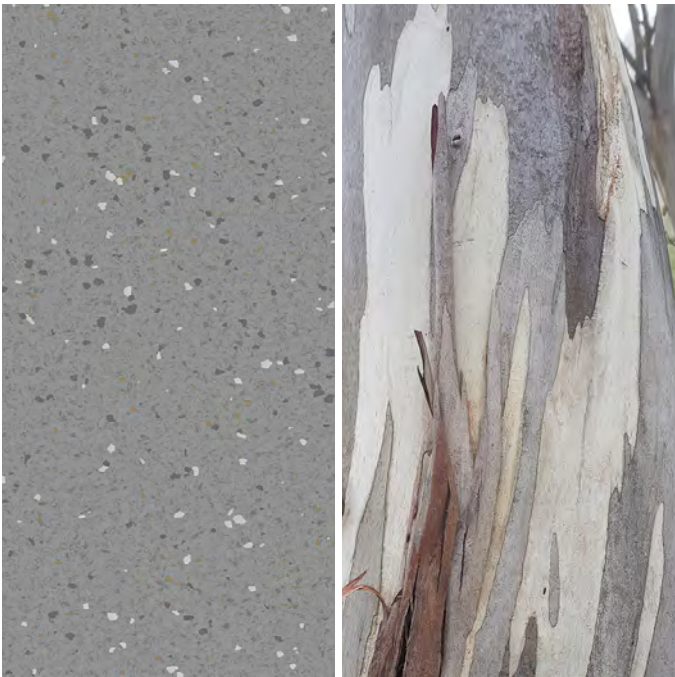

**Alpine Gum** | 5R502231  
Foothold | 5R522231

LRV 32.00



**Osprey** | 5R502181  
Foothold | 5R522181

LRV 48.57



**Karri** | 5R502171  
Foothold | 5R522171

LRV 42.20

Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only  
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering online via our [AU website](#) or [NZ website](#)



# Natralis® Collection

*Colour Palette*

Roll size: 2.0mm x 1.83m x 20m



**Quokka** | 5R502191  
Foothold | 5R522191

LRV 33.83



**Billabong** | 5R502161  
Foothold | 5R522161

LRV 30.93




**Wattle** | 5R502281

LRV 39.90



**Red Gum** | 5R502151

LRV 29.79

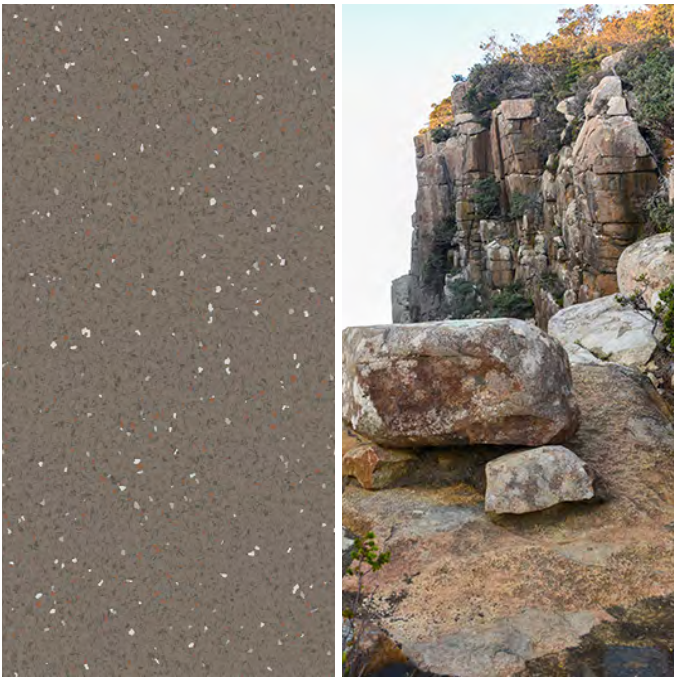


**Cape Pillar** | 5R502311

LRV 19.99



**Kookaburra** | 5R502201

LRV 13.14

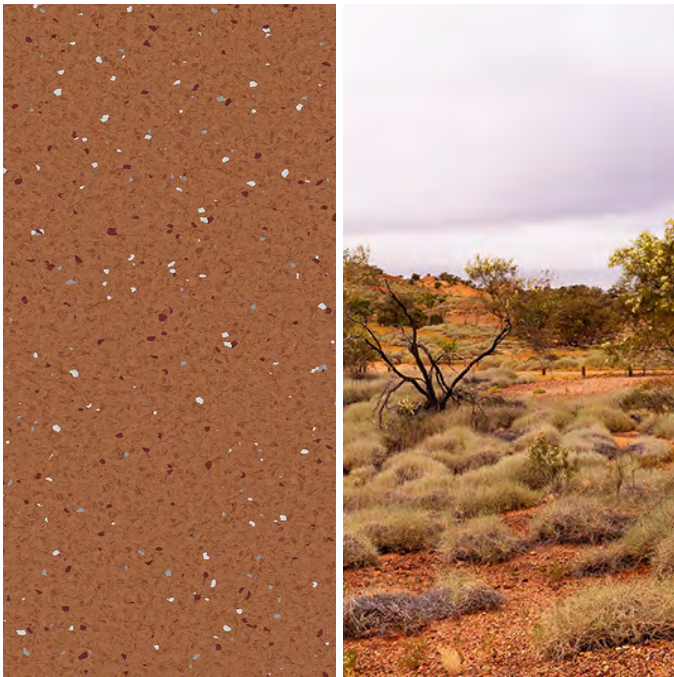

**Winton** | 5R502141

LRV 21.31



**Karijini** | 5R502131

LRV 16.42


Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only  
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering online via our [AU website](#) or [NZ website](#)



# Natralis® Collection


*Colour Palette*

Roll size: 2.0mm x 1.83m x 20m

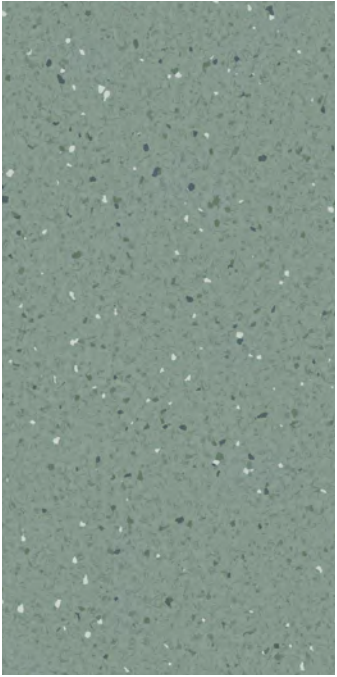


**Eucalyptus** | 5R502321  
Foothold | 5R522321

LRV 29.66

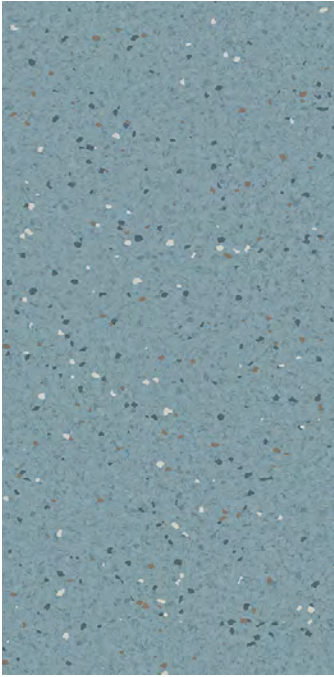



**Tea Tree** | 5R502251  
Foothold | 5R522251

LRV 29.51

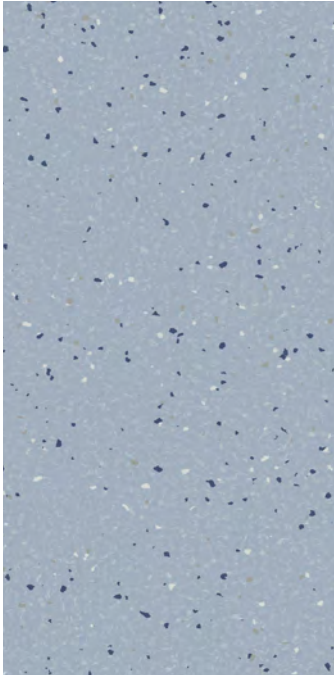


**Lilico** | 5R502291  
Foothold | 5R522291

LRV 39.77

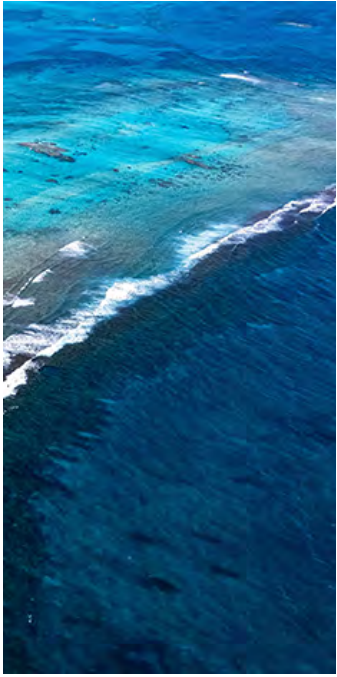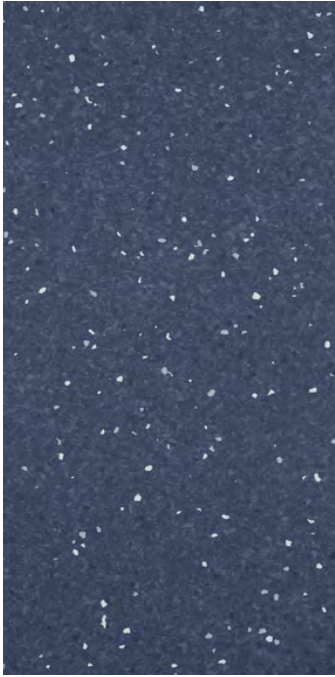


**Ningaloo** | 5R502301

LRV 11.46

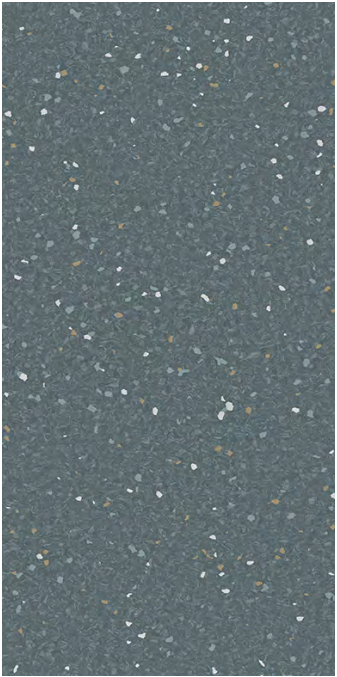

**Daintree** | 5R502261

LRV 17.70

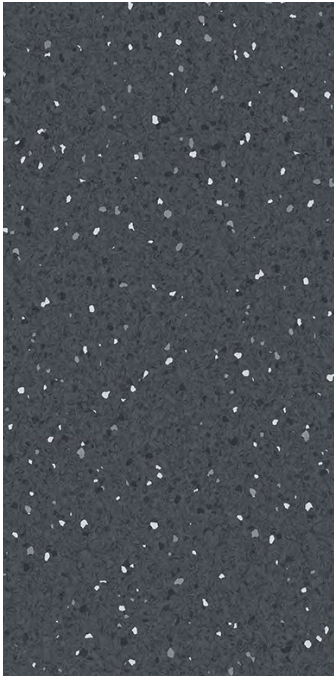

**Windjana** | 5R502111

LRV 12.14

Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only  
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering online via our [AU website](#) or [NZ website](#)



# Natralis® Collection

Room Visualiser


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

AUSTRALIA

NEW ZEALAND

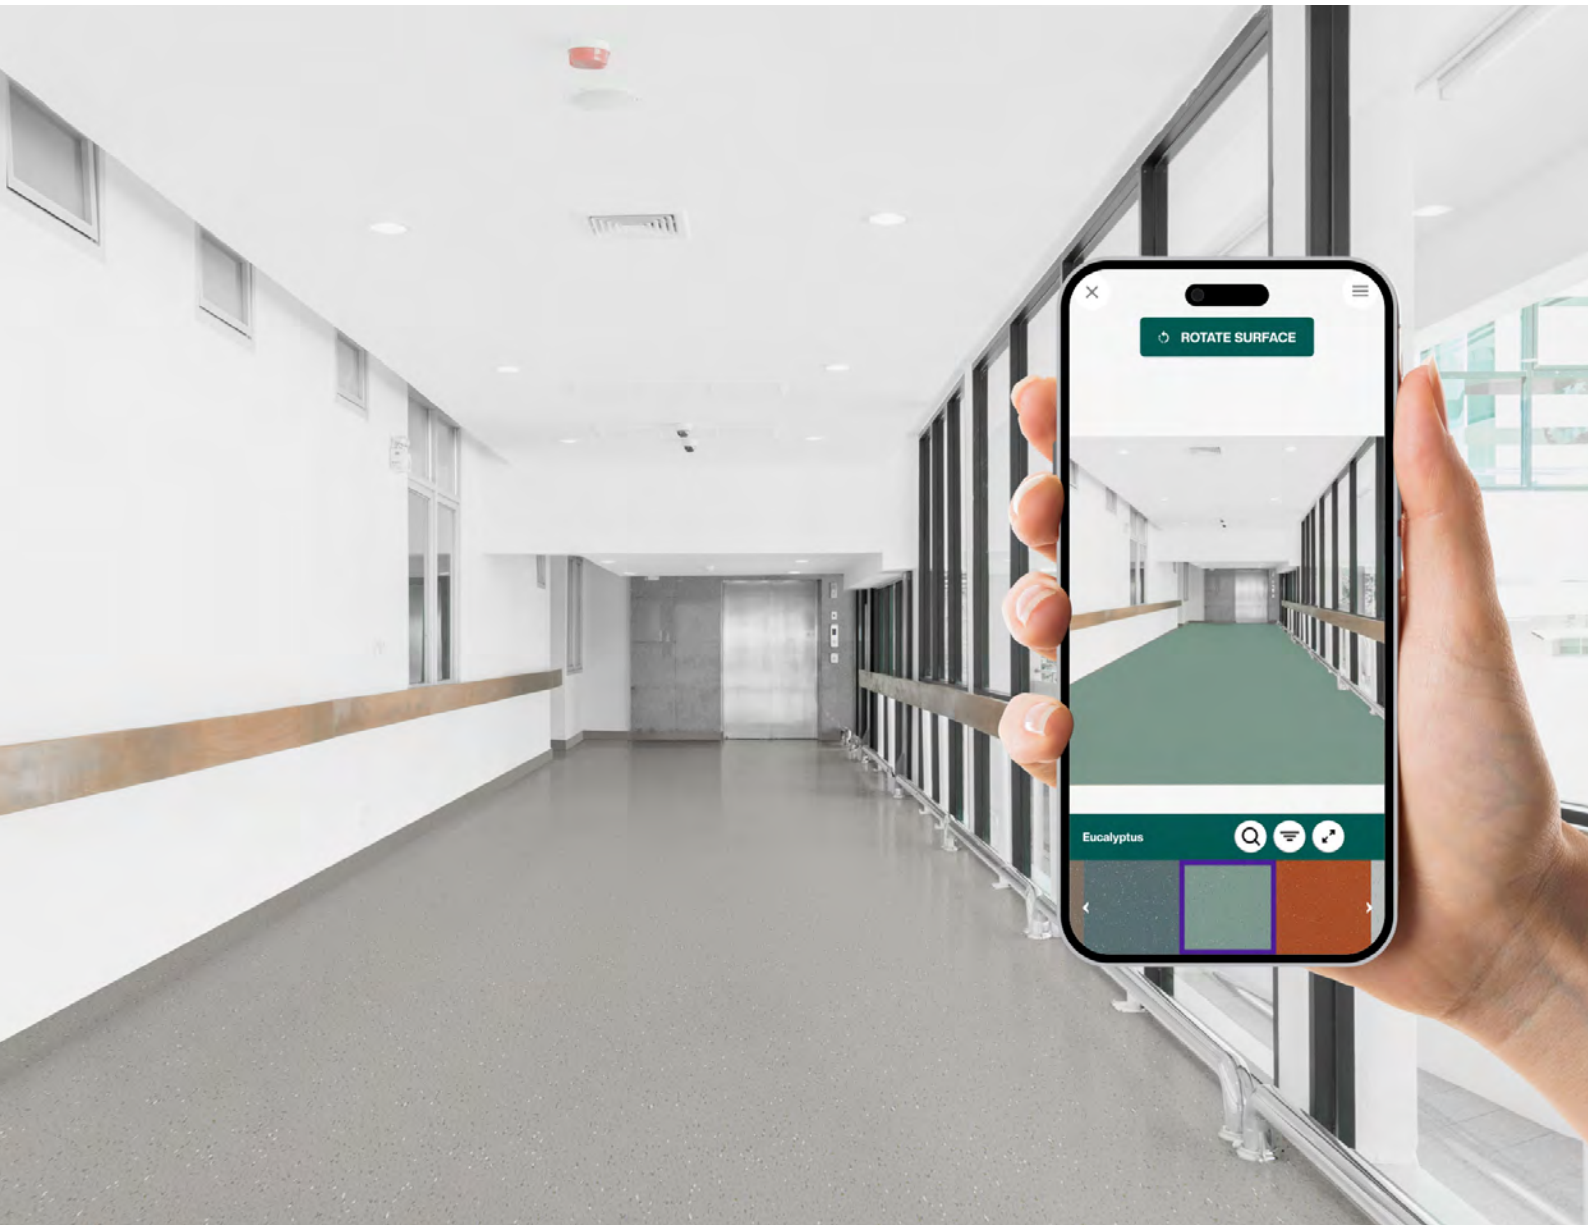

# Natralis® Collection

Technical Data

| Product Classification   |  | Natralis®  | Natralis® Foothold   |
|--|--|--|--|
| Type of floor covering   | EN ISO 10581   | Homogeneous sheet vinyl                                      | Homogeneous sheet vinyl                                      |
| Binder Content   | EN ISO 10581.4.1   | Type I   | Type I   |
| Classification (Use Area)  | ISO 10874  | Commercial: 34 (Very Heavy)<br>Light Industrial: 43 (Heavy)  | Commercial: 34 (Very Heavy)<br>Light Industrial: 43 (Heavy)  |
| Warranty*  | Commercial - available upon request  | 15 years   | 15 years   |
| *All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the commercial warranty, contact your Armstrong Flooring representative. |  |  |  |
| Physical Properties  |  |  |  |
| Manufactured in  | -  | Australia  | Australia  |
| Polyurethane reinforced  | -  | Yes PUR  | Yes PUR + Aluminium Oxide                                    |
| Colours (Standard)   | -  | 22   | 12   |
| Overall thickness  | ISO 24346  | 2.0mm  | 2.0mm  |
| Surface texture  | -  | Lightly embossed   | Embossed   |
| Roll width   | ISO 24341  | 1.83m  | 1.83m  |
| Roll length  | ISO 24341  | 20m  | 20m  |
| Coverage/roll  | -  | 36.6m <sup>2</sup>   | 36.6m <sup>2</sup>   |
| Product weight/m <sup>2</sup>  | ISO 23997  | 3.0kg/m <sup>2</sup>   | 2.9kg/m <sup>2</sup>   |
| Installation   |  |  |  |
|  | To current AS/NZS 1884 and Armstrong Flooring Installation Instructions - Homogeneous Vinyl Sheet Flooring | Full stick, reverse sheets, heat weld or seambond seams      | Full stick, reverse sheets, heat weld or seambond seams      |
| Sustainability   |  |  |  |
| GreenTag GreenRate   | -  | GreenRate Level A  | GreenRate Level A  |
| GreenTag LCARate   | -  | LCARate Gold   | LCARate Gold   |
| Environmental Product Declaration  | -  | Yes  | Yes  |
| Best Environmental Practice PVC  | -  | Yes  | Yes  |
| TVOC Emissions   | -  | Compliant with Green Building Council low VOC emission rates | Compliant with Green Building Council low VOC emission rates |
| Technical Performance  |  |  |  |
| Slip Resistance  | AS 4586<br>Wet Pendulum (Appendix A)<br>Wet Barefoot (Appendix C)<br>Oil Wet (Appendix D)                  | P3<br>-<br>R10   | P4<br>B<br>R11   |
| Fire Resistance (Floor)  | AS ISO 9239-1<br>Critical Radiant Flux (CHF Value)<br>Smoke Development Rate                               | ≥ 4.5kW/m <sup>2</sup><br>≤ 750%.min                         | ≥ 4.5kW/m <sup>2</sup><br>≤ 750%.min                         |
| Fire Resistance (Walls)  | AS 5637.1<br>Cone Calorimeter<br>Average specific extinction area  | Group 3<br>< 250m <sup>2</sup> /kg                           | Group 3<br>< 250m <sup>2</sup> /kg                           |
| Other  |  |  |  |
| Colour fastness  | ISO 105-B02, Method 3  | Pass   | Pass   |
| Residual indentation   | ISO 24343-1  | Pass   | Pass   |
| Chemical resistance  | -  | Good resistance  | Good resistance  |
| Flexibility  | ISO 24344, Method A  | Pass   | Pass   |
| Castor chair   | ISO 4918   | Pass   | Pass   |
| Seam strength  | ISO 16906  | Pass   | Pass   |
| Accreditation  |  |  |  |
| Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems   |  |  |  |

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit [armstrongflooring.au](http://armstrongflooring.au) or [armstrongflooring.co.nz](http://armstrongflooring.co.nz)  
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.  
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.





**Learn more**

[www.armstrongflooring.au/natralis](http://www.armstrongflooring.au/natralis)



[www.armstrongflooring.co.nz/natralis](http://www.armstrongflooring.co.nz/natralis)



---

# **Armstrong**Flooring™

## **Australia**

29-39 Mills Road, Braeside VIC 3195  
1800 632 624  
[customerservices@armstrongflooring.au](mailto:customerservices@armstrongflooring.au)  
[www.armstrongflooring.au](http://www.armstrongflooring.au)

## **New Zealand**

39/332 Great North Road, Grey Lynn, Auckland 1021  
0800 449 649  
[customerservices@armstrongflooring.co.nz](mailto:customerservices@armstrongflooring.co.nz)  
[www.armstrongflooring.co.nz](http://www.armstrongflooring.co.nz)