


## OFR 350 LED 5K BK

### Item number

EL10710315

### GTIN

4015120710315

ON/OFF	LED 5000 K	Φ 1670 lm	64 lm/W	IP55	
--------	---------------	--------------	---------	------	-------------------------------------------------------------------------------------



### Product description

- LED spotlight
- Design lamp made of aluminum extruded profile and plastic
- 26 W, light colour approx. 5000 K white
- Rear Projection technology

### Technical data

#### GENERAL

Device category	Floodlights
Remote controllable	-
Conformity	CE, RoHS, WEEE
Warranty	3 years

#### ATTACHMENT

Installation type	Surface mounting
Installation position	Wall
Type of connection	Screwed terminal
Connectable wire cross section	1.5 – 2.5 mm <sup>2</sup>
Number of contacts	2

#### HOUSING

Dimensions	Length 176 mm x Width 137 mm x Height/Depth 198 mm
Weight	270 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP55

Permissible ambient temperature	-25 °C...+50 °C
Colour	black, similar to RAL 9005

#### ELECTRICAL VERSION

Control system	ON/OFF
Protection class	II
Nominal voltage	230 V ~ / 50 Hz

#### LIGHT

Diffuser	transparent
Light emission	direct
Beam angle	120 °
Flicker factor	<10 %
Rated output P	26 W
Luminous flux	1670 lm
Luminous efficacy	64 lm/W
Colour temperature	5000 K
Colour rendering index Ra	>70


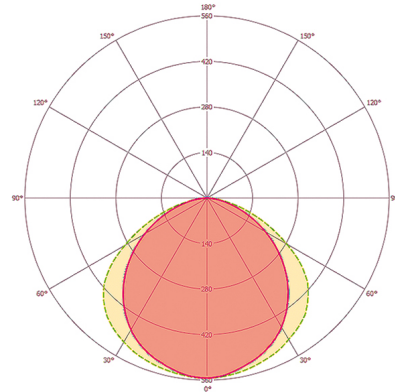
## OFR 350 LED 5K BK

**Item number**

EL10710315

**GTIN**

4015120710315

**Dimension drawing****Light distribution****Detailed product description**

- LED floodlight
- Design lamp made of aluminum extruded profile and plastic
- 26 W, light colour 5000 K white
- Rear Projection technology
- One-hand plug-base installation
- Covered connector base with large wiring space
- Diaphragm line entrance for quick and easy installation
- Plug-in terminal for through-wiring of the protective conductor included