

ultra

PLANK SPECIFICATION SHEET

Ultra Collection Engineered T&G plank by Forté. 21mm thick, 190mm wide and 1900mm length. Glue down installation method onto substrate. Pre-finished with PureMatte Lacquer

PRODUCT DETAILS

Collection	Ultra
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	21mm
Width	190mm
Length	1900mm
% of Shorts	Up to 25%
Wear Layer	6mm Solid European Oak
Core	Plywood
Construction	2-layer Engineered
Re-sands	Approximately 4-5 (<i>approx. 1mm removed per re-sand</i>)
Surface Texture	Brushed
Surface Sheen	Matte
Bevel	Bevel 4 sides
Status	Pre-finished (<i>no additional coats required</i>)
Finish	PureMatte Lacquer
Species	European Oak
Wood Grade	Feature Grade except Marbled and Champagne which are Prime Grade (refer page 2 for details)

Ultra Collection is also available in stair nosings

STRUCTURAL WARRANTY

5 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties



INSTALLATION

Installation Method	Glue down (<i>Double Stick for Multi-level</i>)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue & Groove 4 sides
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (Ensure screed is suitable for UFH) • Enquire for other systems
Wet Area Suitability	Contact the Forté team for information

TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 5.7kW/m ²
Reaction to Fire (Walls & Ceilings)	Group 2-S / Class Cfl-s1
Wear Layer Density	650kg/m ³
<u>Formaldehyde Emission</u> (AS/NZS 2098.11)	E0 (0.13 mg/L)
<u>Slip Ratings</u> AS/NZS 4586 Dry Test	Classification F, Mean COF 0.70
AS/NZS 4586 Wet Test	Classification X, Pendulum Mean 37 BPN

PACK INFORMATION

Pack Size	1.4364m ²
Pieces per pack	4
Pack Weight	19.6kg
Pack Dimensions	W 204mm L 1927mm x H 90mm

Plank Profile

ULTRA

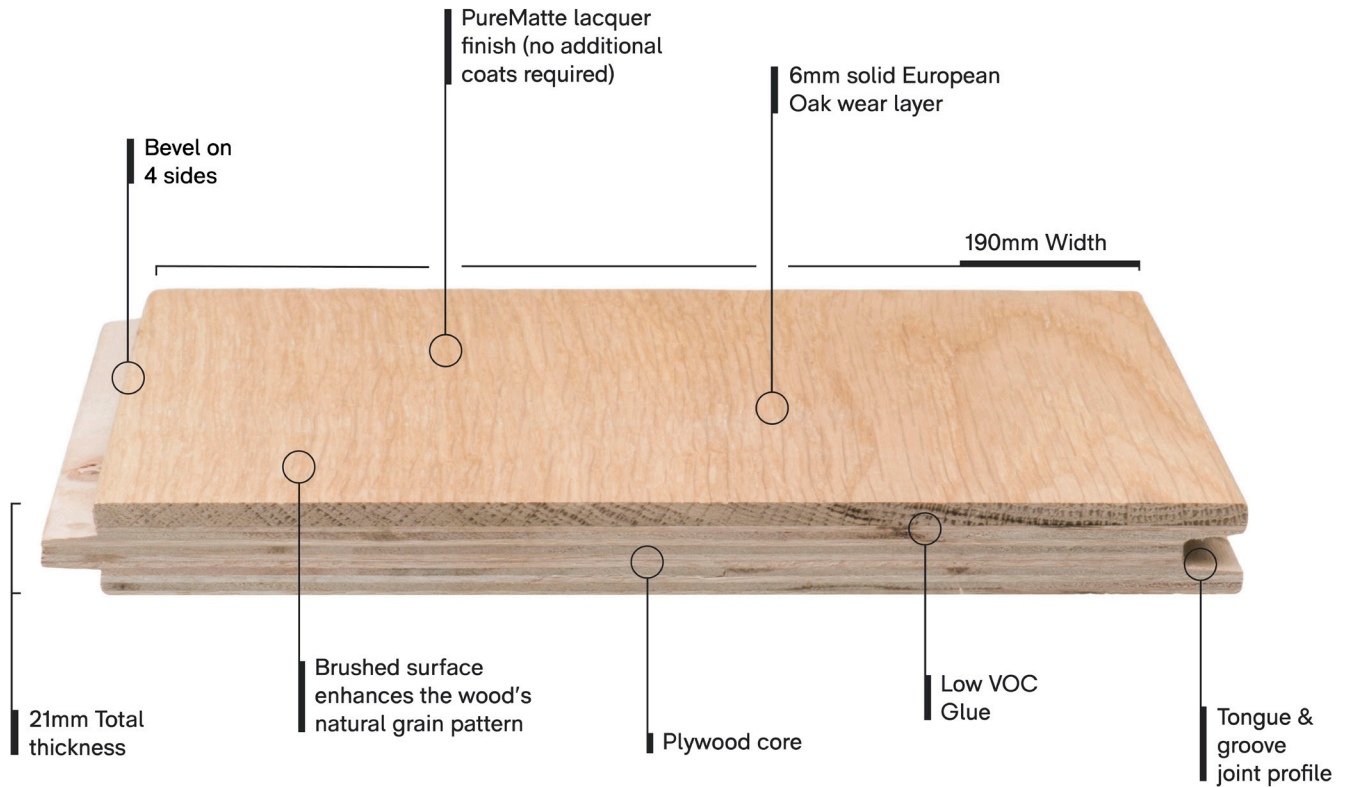

ULTRA – FEATURE GRADE



An Ultra feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

ULTRA – PRIME GRADE



An Ultra prime grade plank will typically contain slight natural colour variation. This grade allows for less frequent and small knots. Minimal sapwood should be expected throughout the planks. Cracks and checks may be slightly present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

ULTRA 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Ultra Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

ULTRA 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Ultra Collection comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE ULTRA COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Ultra timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation