



ArmstrongFlooring™

Safeguard®
Safety Vinyl Sheet

Desert | 4D12Q052

Safeguard® Collection

Safety Vinyl Sheet

The Safeguard® collection is a commercial safety flooring solution that includes three ranges - Safeguard® R10, R11, and R12 - each designed with different slip ratings to meet the needs of various high-risk environments.

Each product incorporates a blend of silicon carbide, quartz, and aluminium oxide to enhance slip resistance in demanding areas. The durable aluminium oxide and silicon carbide ensures long-lasting slip and wear resistance, and when combined with the high-quality PVC wear layer, it provides exceptional dent and gouge protection.


Safeguard® is an ideal choice for commercial kitchens, hospitality venues, retail spaces, and light industrial settings.

Features & Benefits




SLIP RESISTANT

Creates a safer environment and helps prevent slips




HIGH FOOT TRAFFIC

Designed to withstand areas with high traffic flow




LOW MAINTENANCE

Easy to maintain so ideal for commercial areas




HIGHLY DURABLE

Superior even wear for a consistent appearance



CHEMICAL RESISTANT

Built for environments exposed to chemicals



HYGIENIC SURFACE





Helps prevent mould and bacteria growth



Safeguard® R10

Colour Palette

Roll size: 2.0mm x 2m x 20m

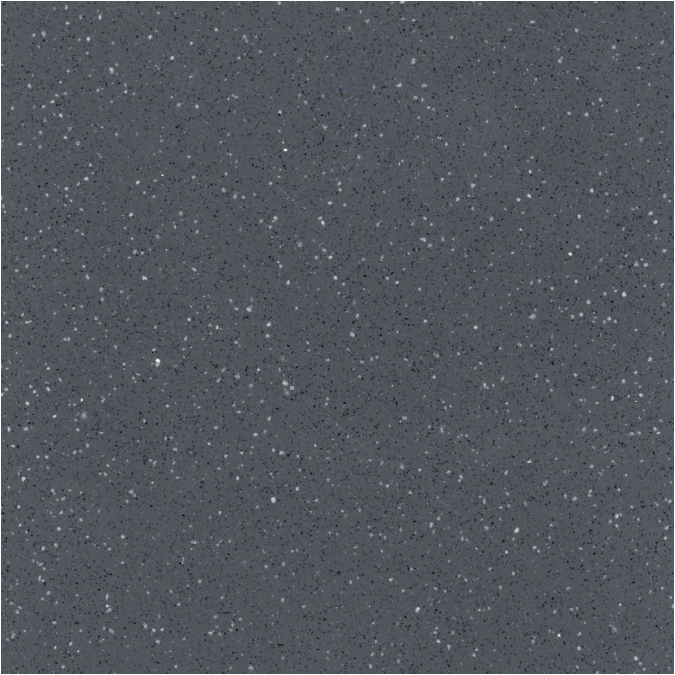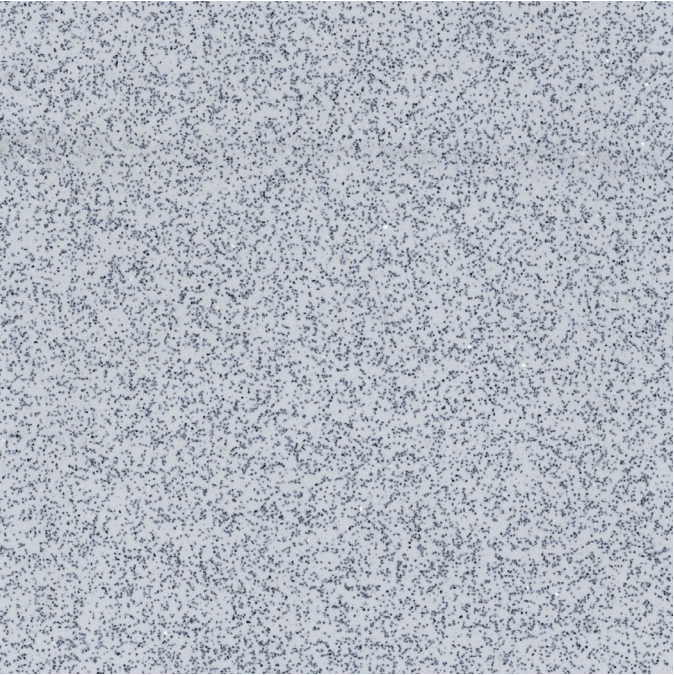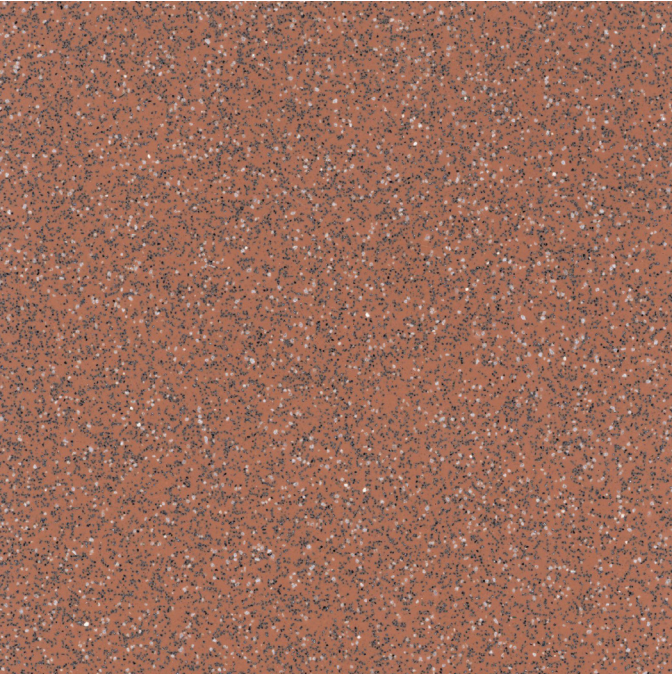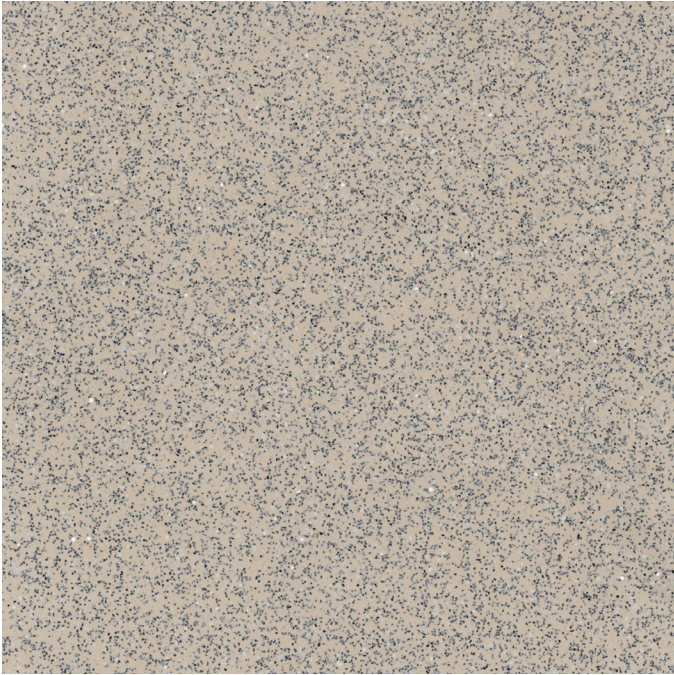

Beige | 4D100052

Pindan | 4D100072

Light Grey | 4D100022


Mid Grey | 4D100012

LRV 38.43

LRV 23.22

LRV 41.19

LRV 15.54

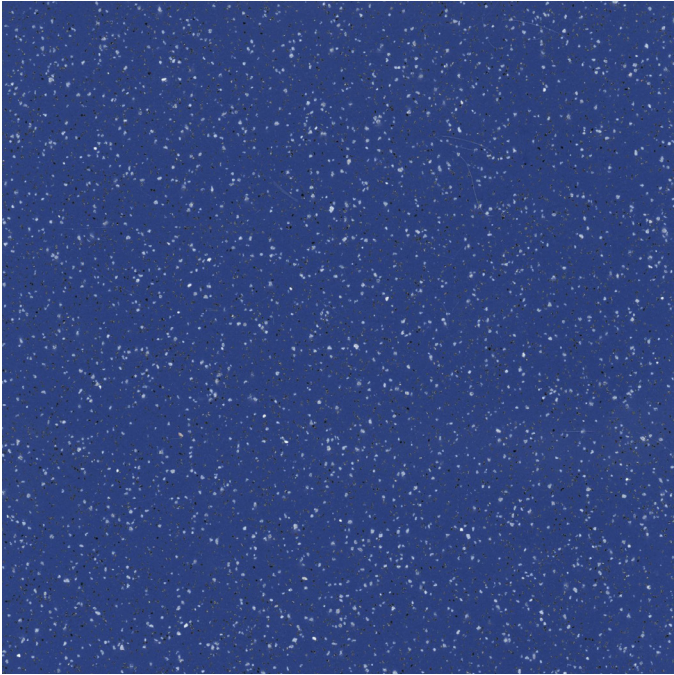

Blue | 4D100082

Black | 4D100002

LRV 10.94





LRV 7.37

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our [AU Website](#) or [NZ Website](#)

Safeguard® R11

Colour Palette

Roll size: 2.0mm x 2m x 20m

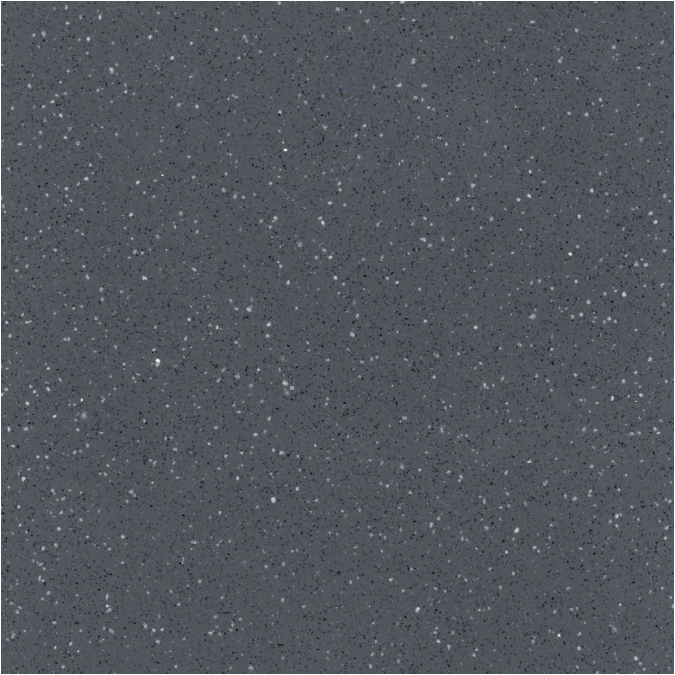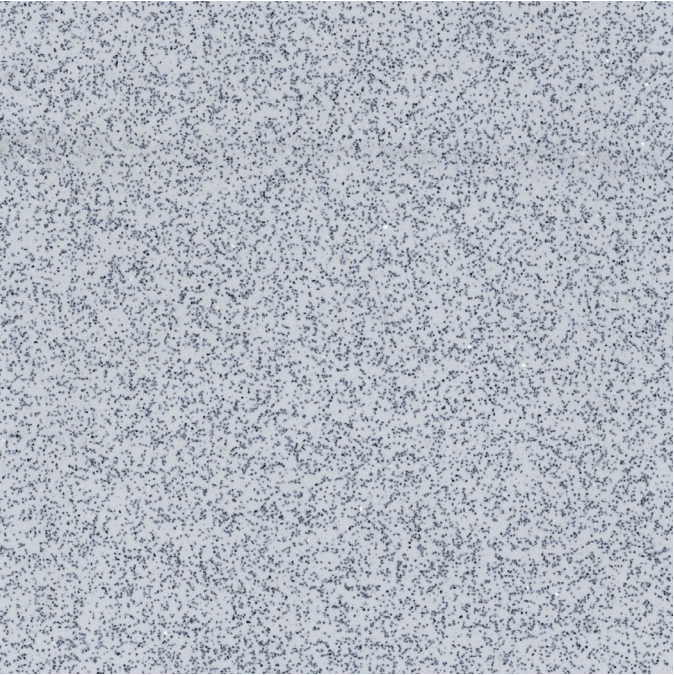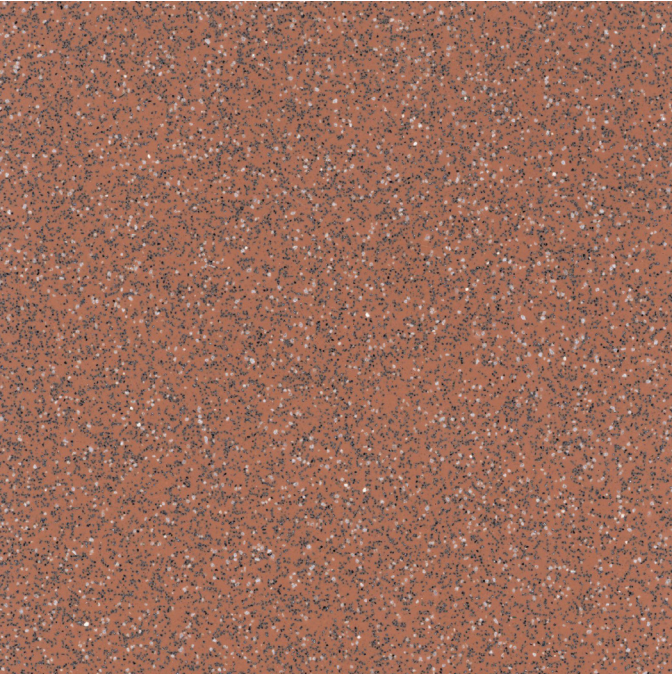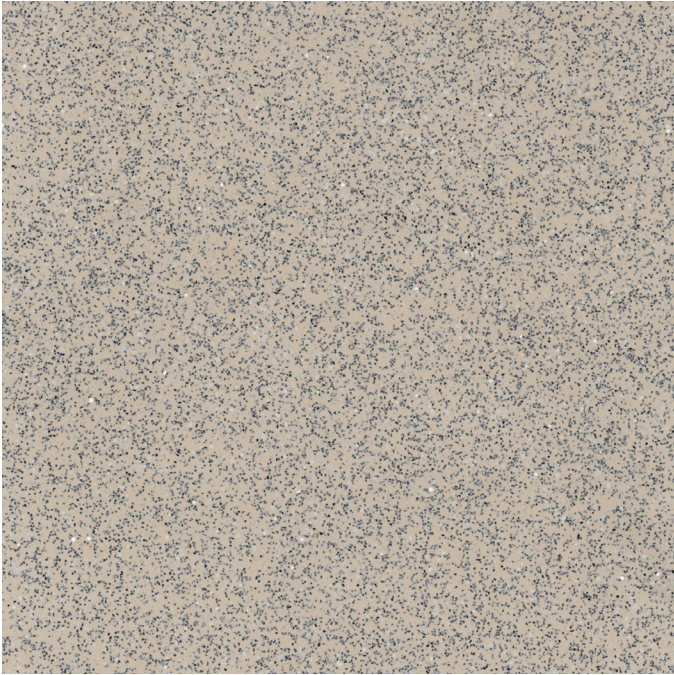

Dune | 4D110052

Pilbara | 4D110072

Zinc | 4D110022


Slate | 4D110012

LRV 36.71

LRV 23.44

LRV 41.55

LRV 14.43

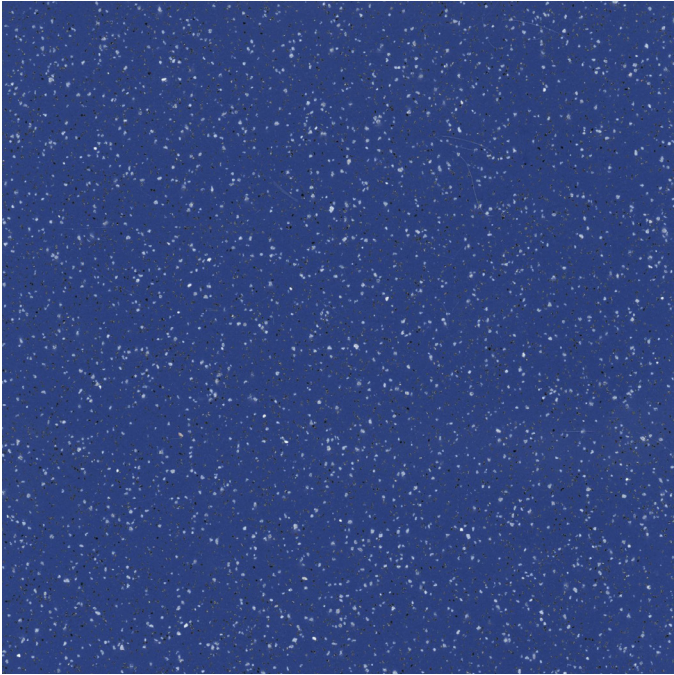

Cobalt | 4D110082

Coal | 4D110002

LRV 11.51



LRV 7.11

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our [AU Website](#) or [NZ Website](#)

Safeguard® R12

Colour Palette

Roll size: 2.0mm x 2m x 20m

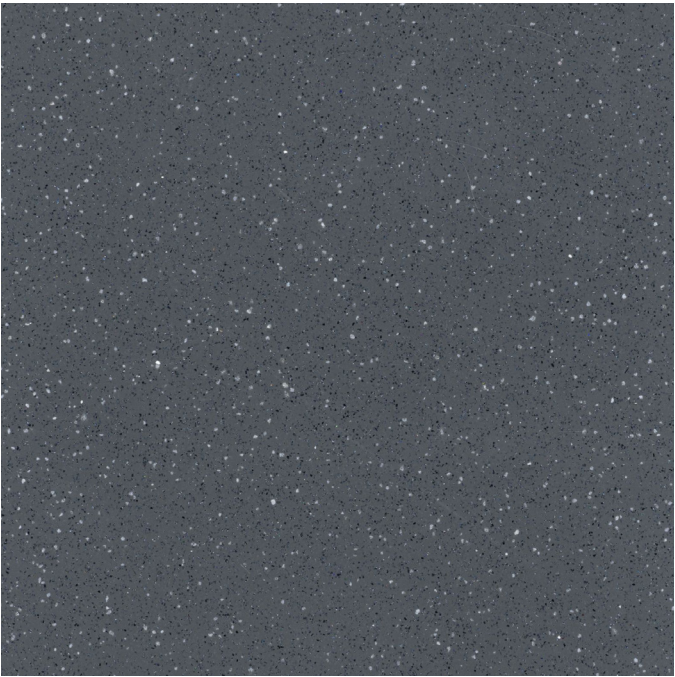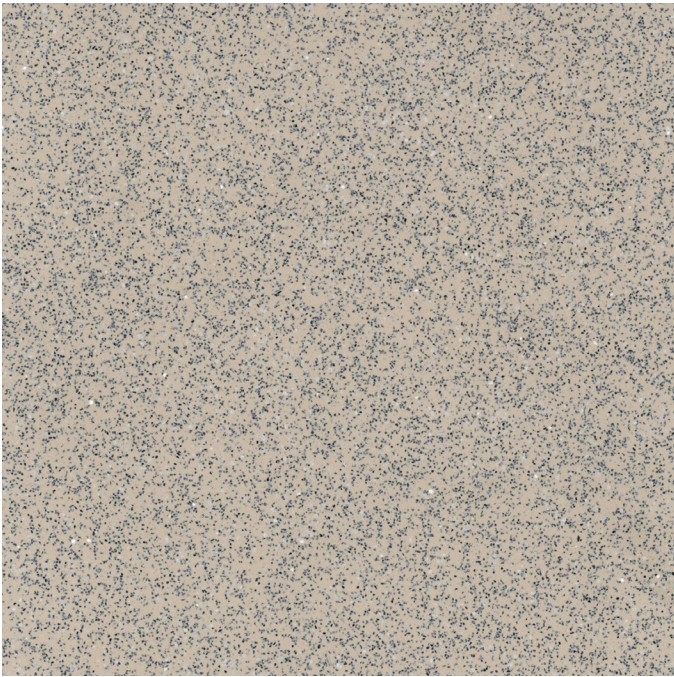

Desert | 4D120052

Paraburdoo | 4D120072

Twilight | 4D120022


Storm Grey | 4D120012

LRV 37.03

LRV 23.44

LRV 41.55

LRV 16.01

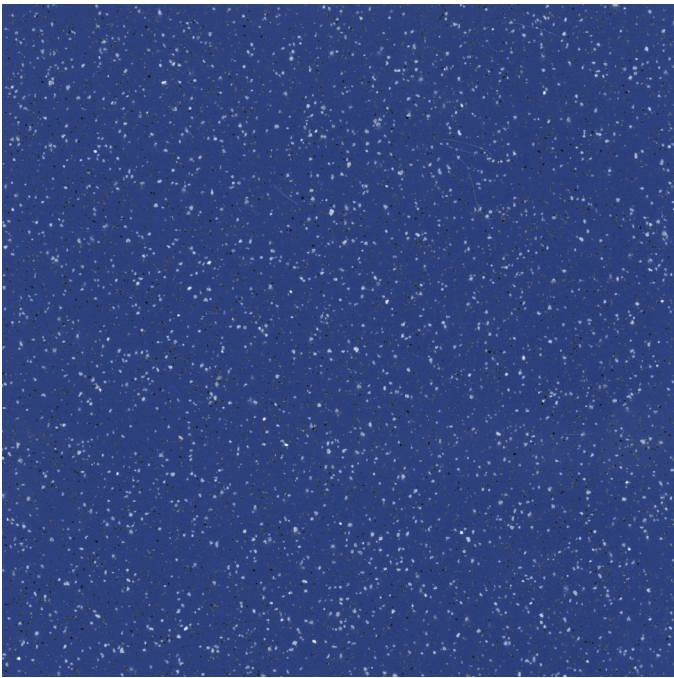

Night Sky | 4D120082

Midnight | 4D120002

LRV 12.03

LRV 6.93

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our [AU Website](#) or [NZ Website](#)

Safeguard® Collection

Room Visualiser


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking below.

AUSTRALIA

NEW ZEALAND

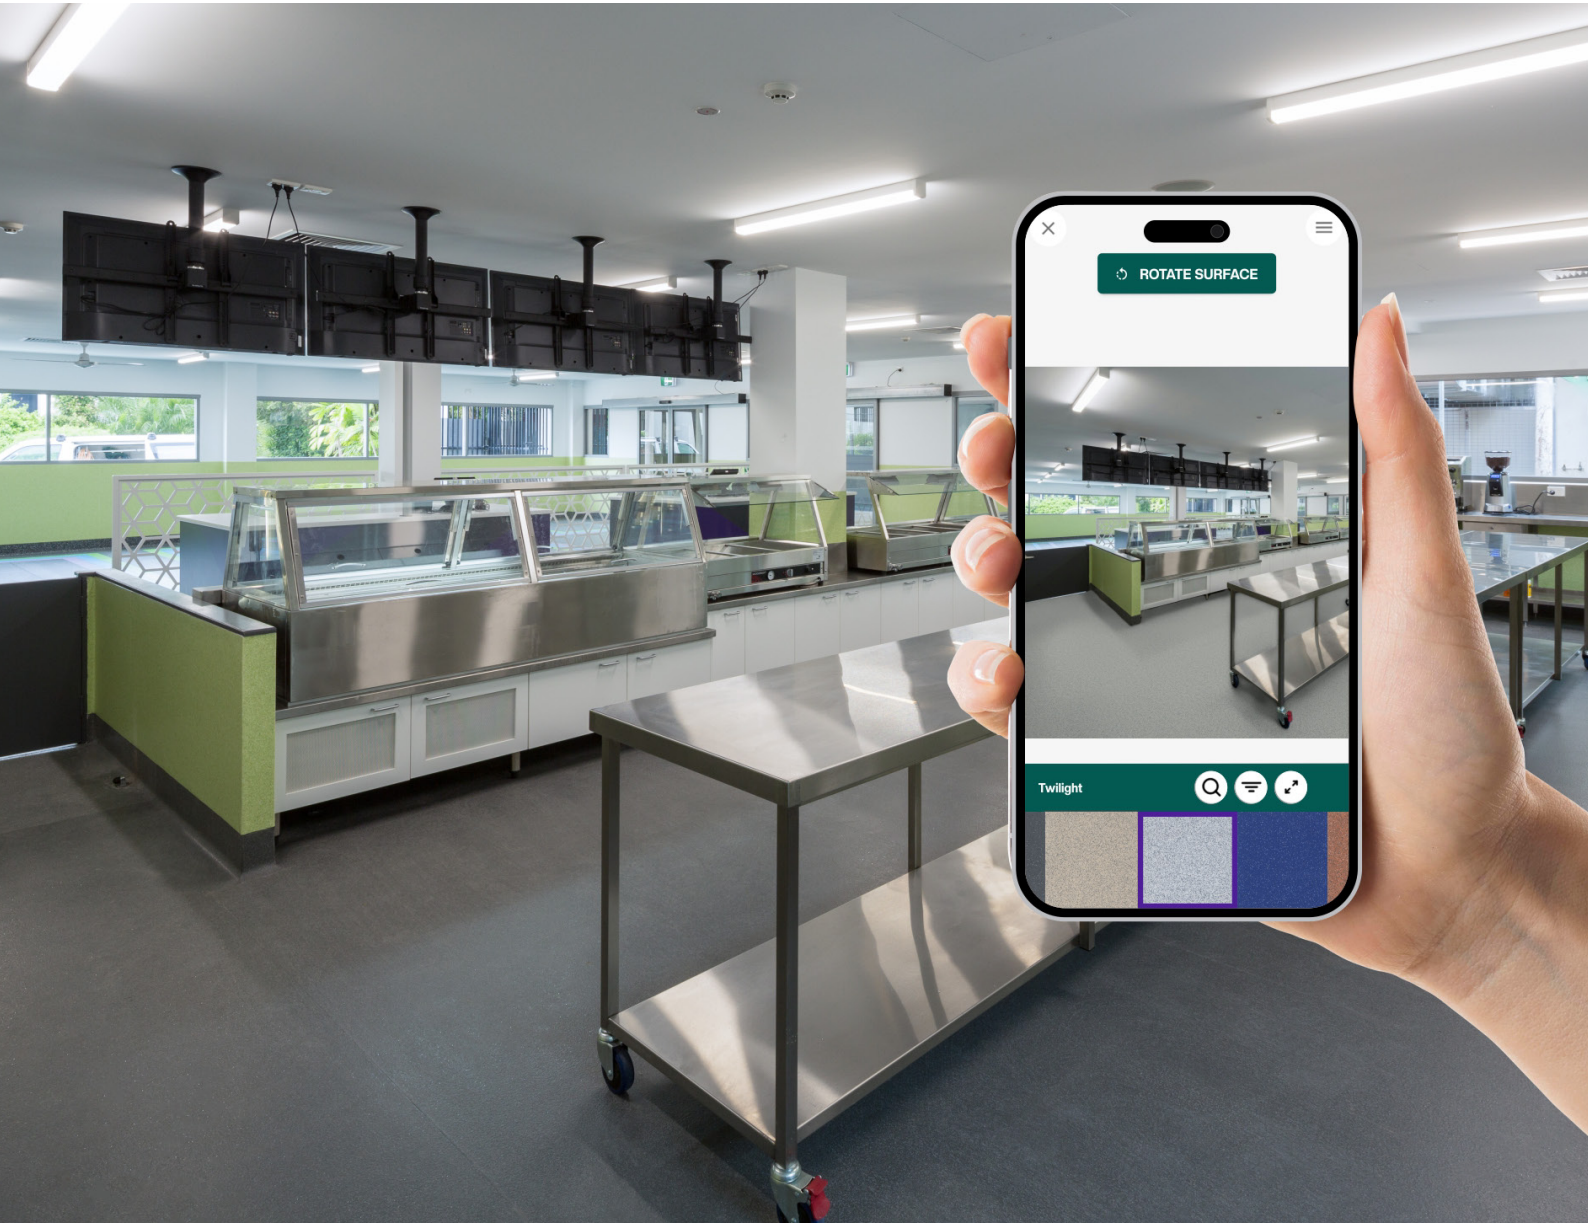

Safeguard® Collection

Technical Data

Product Classification		Safeguard® R10	Safeguard® R11	Safeguard® R12
Type of floor covering	EN 13845	PVC coverings with partial based enhanced slip resistance		
Classification (Use Area)	ISO 10874	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)
Warranty*	Commercial - available upon request	15 years	15 years	15 years

*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the commercial warranty, contact your Armstrong Flooring representative.

Physical Properties

Colours (Standard)	-	6	6	6
Overall thickness	ISO 24346	2.0mm	2.0mm	2.0mm
Surface texture	-	Embossed	Embossed	Embossed
Roll width	ISO 24341	2.0m	2.0m	2.0m
Roll length	ISO 24341	20m	20m	20m
Coverage/roll	-	40.0m ²	40.0m ²	40.0m ²
Product weight/m ²	ISO 23997	2.5kg/m ²	2.5kg/m ²	2.5kg/m ²

Installation

	To current AS/NZS 1884 and Armstrong Flooring Installation Instructions – Safeguard	Full stick, reverse sheets, heat weld or seambond seams	Full stick, reverse sheets, heat weld or seambond seams	Full stick, reverse sheets, heat weld or seambond seams
--	---	--	--	--

Sustainability

TVOC Emissions	-	Compliant with Green Building Council low VOC emission rates	Compliant with Green Building Council low VOC emission rates	Compliant with Green Building Council low VOC emission rates
----------------	---	--	--	--

Technical Performance

Slip Resistance	AS 4586 Wet Pendulum (Appendix A) Oil Wet (Appendix D)	P3 R10	P4 R11	P5 R12
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m ² ≤ 750%.min	≥ 4.5kW/m ² ≤ 750%.min	≥ 4.5kW/m ² ≤ 750%.min
Other				
Colour fastness	ISO 105-B02, Method 3	Pass	Pass	Pass
Residual indentation	ISO 24343-1	Pass	Pass	Pass
Chemical resistance	-	Good resistance	Good resistance	Good resistance
Flexibility	ISO 24344, Method A	Pass	Pass	Pass
Castor chair	ISO 4918	Pass	Pass	Pass
Seam strength	ISO 16906	Pass	Pass	Pass
Static electrical propensity	EN 1815	Antistatic ≤2kV	Antistatic ≤2kV	Antistatic ≤2kV

Accreditation

Manufactured under accredited ISO 9001 quality and ISO 14001 environmental management systems

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.

Learn more

www.armstrongflooring.au/safeguard



www.armstrongflooring.co.nz/safeguard



ArmstrongFlooring™

Australia

29-39 Mills Road, Braeside VIC 3195
1800 632 624
customerservices@armstrongflooring.au
www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021
0800 449 649
customerservices@armstrongflooring.co.nz
www.armstrongflooring.co.nz