Door Core and Component Specifications

پېټېږ Superior <mark>Doors</mark>

Rails & Stiles

Rails: 60x30mm Finger Jointed Pine

• Stiles: 30X30mm Finger Jointed Pine

LockBlock

398x68x30mm Finger Jointed Pine

Core

- High Density Solid Core Polystyrene
- Up to 98% Glue Contact area
- · Will not delaminate after impact
- Enhanced thermal and acoustic qualities

Steel Inserts

- Custom designed and precision engineered
- · Anti corrosive pre galvanised steel
- 38.1 x 29.9mm


All specifications applicable to stock doors from 610-910mm.

Visit http://www.superiordoors.co.nz/specifications/Superior-Doors-Guarantee.pdf for full care, handling and guarantee details.



200mm(Aprox) 160mm (Aprox)

398x68x30mm

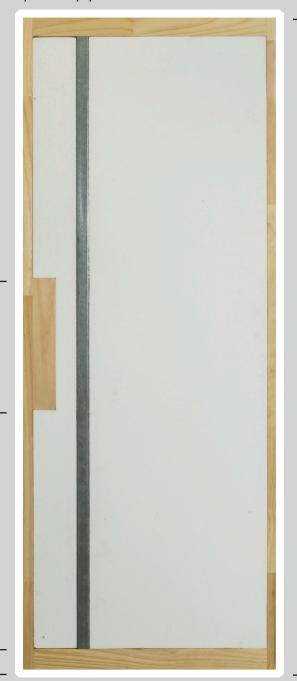

■ 30x30mm

Photograph shows a 1980x760 door