





Description


FLX™ is Manufactured in NZ for New Zealand conditions, FLX™ is a proven product and has been on the market for over 10 years. FLX™ is a highly flexible waterproof acrylic plaster membrane, that is applied over substrates to assist in providing resistance against cracking. FLX™ is non-cement based waterborne acrylic plaster system containing aggregate to provide flexibility and has excellent adhesion qualities. FLX™ comes with a 20 year warranty.

System Guarantee Period

20 Years





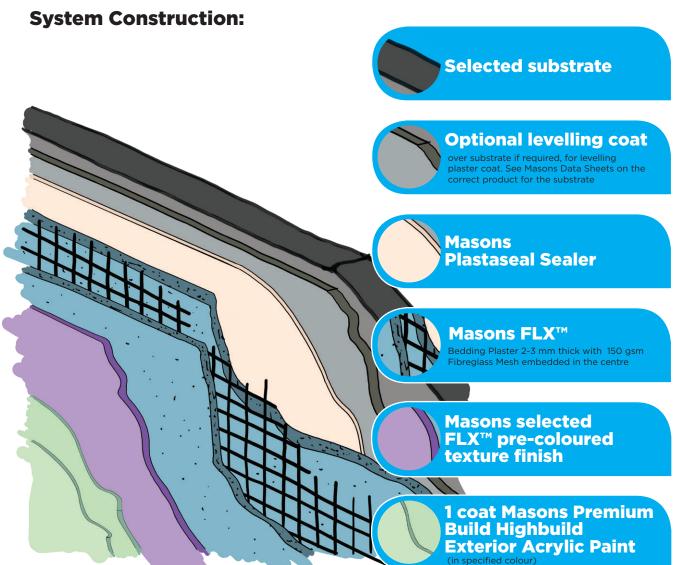



Flexible Render System

Advantages

The highly flexible properties of FLXTM provide a crack free finish on the exterior surface of the substrate, providing the homeowner, contractor or designer with the security of added protection to their investment.

Application

Levelling coat

The substrate may require you to apply levelling coat of plaster first (refer to Masons Data Sheets on the correct plaster for the substrate).

Sealer

Apply Masons Plastaseal Sealer over the first coat of plaster, this will stop the suction between FLX™ bedding render and the first coat of plaster, hence giving you more working time with the product on the wall.

FLX™ Bedding Render

Apply 3-4 mm of FLX™ over the surface with Masons Fibreglass Mesh embedded into the wet plaster. Overlap each successive length be 50 mm minimum.

To opening reveals mesh over the PVC flashings. Apply diagonal reinforcing strips to the corners of windows, doors and exterior openings.

Cure Finish

Cure and protect from rapid drying in accordance with Masons requirements.

Paint Finish

Apply 2 coats of Masons Premium Build High Build Acrylic Paint over the textured finish (if pre-coloured texture has been used then only 1 coat of paint is required). Darker colours heat up in the sun and can cause problems with expansion and contraction of the surface and for this reason the paint colour is restricted to a depth of 25% LRV or more for guarantee purposes.