



Hardwood Decking Species Guide

Technical Specifications


GARAPA

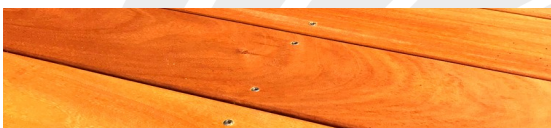

PURPLEHEART

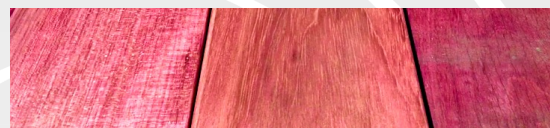

KWILA

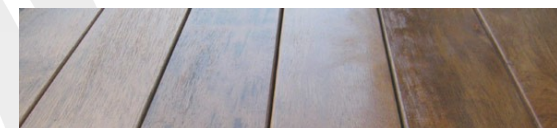

Density –KG/M3 (dry)

850

870

870

Durability

Class 2 (Durable) above ground

Class 1 (Very Durable) above ground

Class 2 (Durable) above ground

Stability

3.5% Radial - 6.5% Tangential

3.0% Radial - 6.0% Tangential

1.5% Radial - 2.5% Tangential

Standard sizes

90x19 , 140x19/21

90x19 , 140x19, 140x21 Camber deck Profile

140x19

Length Spread

1.8 - 5.7m 3.0m average

1.2 - 5.4m 3.0m average

1.8 - 5.7m 3.0m average

Sustainability/ certified

FSC certified on request

FSC certified on request

FSC certified

Tannin Bleed

Colour Golden - Minimal Bleed

Colour Purple - Minimal Bleed

Colour Brown - Heavy Bleed

Surface checking

May occur over time

May occur over time

May occur over time

Black Spotting

Usually a reaction to metal filings on the surface
Can be cleaned with Deck cleaners

Can occur with metal filings on site
Can be cleaned with Deck cleaners

Can occur on site with contamination
Can be cleaned with Deck cleaners

Weathered colour

Silver/ Grey

Silver/ Grey

Silver/ Grey



All decking can be BBS factory coated with Dryden deck oil by volume.
See manufacturers application information at— www.woodoil.co.nz

office@bbstimbers.co.nz

bbstimbers.co.nz

Whangarei

27 Kioreroa Road, Whangarei
PO Box 1407

Ph 094389358

f 094300455

Auckland

82 Henderson Valley
Road, Henderson

Ph 098360124

f 098360103

Christchurch

14 Halwyn Drive
Hei Hei

Ph 033445591

f 033445592