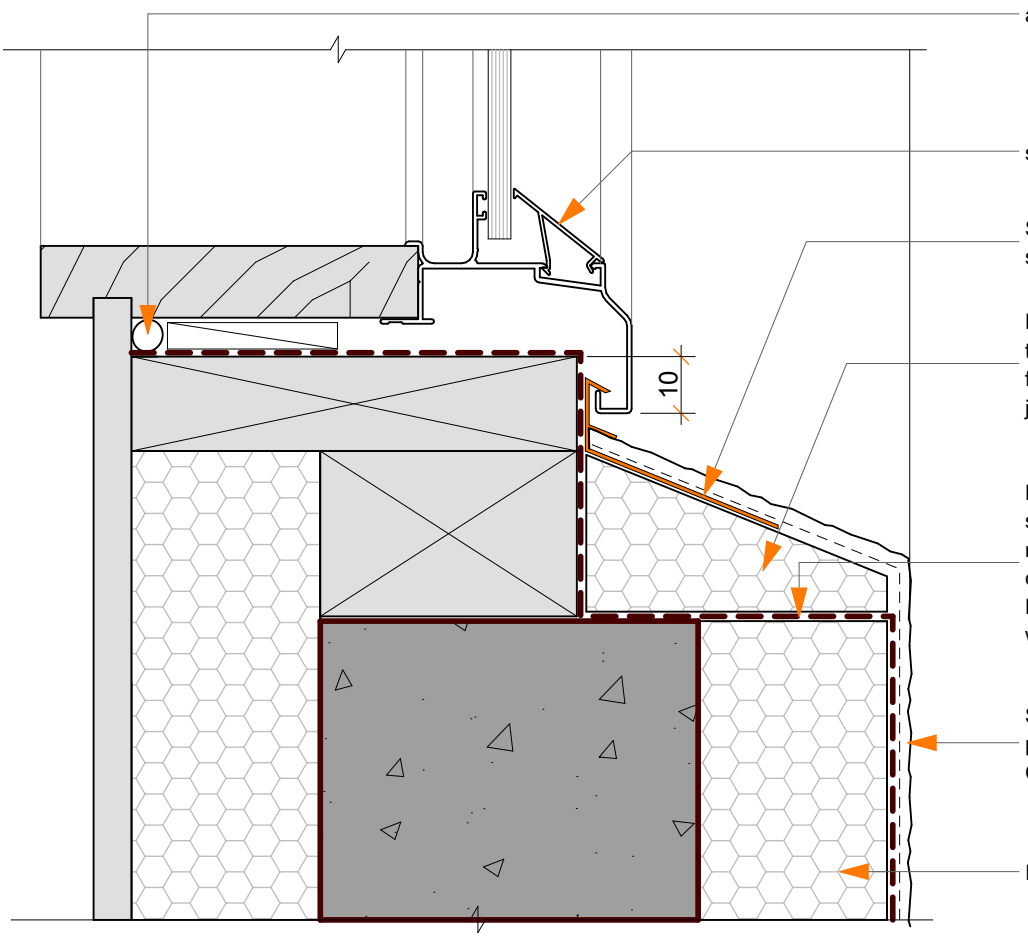

air seal to be installed by builder

selected aluminium joinery

Specialized Construction Products proprietary sill flashing (Modified)

Polystyrene fillet insert approximately 45mm thick to be adhered to tanking membrane following installation to Specialized proprietary jamb flashing

Prior to the joinery being installed, all reveals, sills and 100mm down the face of ICF wall must be waterproofed with a plaster compatible reinforced liquid tanking or Protecto EIFS tape membrane complying with AS/NZS 4858.

Specialized Construction Products ICF plaster system with chosen Specialized Construction Products finish

ICF Block

17

SCALE: 1:2

Window Sill: ALUMINIUM JOINERY - ICF BLOCK

MLC - THIN COAT PLASTER SYSTEM

15/11/2012