



INSTALLATION INSTRUCTIONS

EXTRACT FAN TIME DELAY

Cat 632 Extract Fan Time Delay Switch

OPERATION

The Extract Fan Time Delay Switch turns on the fan when you turn on the light and continues to operate the fan for a period of 8.5 minutes after you turn off the light.

SPECIFICATION AT 25°C

The Extract Fan Time Delay Switch operates on 230-250 Volts A.C. supplies and controls a fan up to a maximum of 100 VA inductive load, with a factory set delay of 8.5 minutes.

For larger loads off the time delay a relay should be used.

Lighting load off the light switch can be up to 16 Amps.


WIRING

Upon initial powering up the unit, the fan will operate for a period of up to 25 minutes.

NOTE: The switch is not an isolating switch for the fan.

For flush mounting use Cat 144 Wiring Box. For surface mounting use Cat 537 or Cat 89 Mounting Block.

Note: Permanent electrical installations are required to be made by a registered electrician.

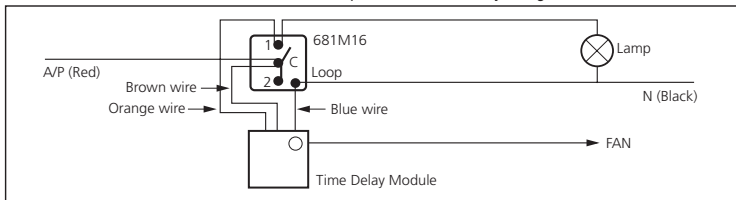

For applications where extract fan time delay is required for use without the light being included in the circuit, a momentary contact switch such as the 680M16P or 681M16PB may be used to replace the 681M16 switch module.

PRODUCT WARRANTY / 12 MONTHS

The fan time delay switch has a 12 months warrant from the date of purchase providing the unit is installed according to these instructions, local wiring regulations and Codes of Practice. This warranty is void on any unit which has been tampered with, damaged by accident, improper operation or incorrect installation.

This guarantee is in addition to, and does not in any way affect the rights under the Consumer Guarantees Act 1993, if the ACT applies to the supply of this product and you are not acquiring the product for a business use. If the ACT applies and any term is inconsistent with the terms of the warranty.

Note: Under the CGA 1993, Schneider Electric advises that this product does not contain user serviceable components thus spare parts and repair facilities are not available.

In the event of a warranty claim, the product must be returned to the point of purchase or direct to Australia/New Zealand distributors together with the proof of purchase.



New Zealand Head Office: PO Box 15 355, New Lynn, Waitakere 0640, New Zealand
Telephone +64-9-829 0490, Fax +64-9-829 0491
www.pdl.co.nz



PDL Industries Australia Pty Ltd
Locked Bag 5500, Baulkham Hills Business Centre
Baulkham Hills NSW 2153 Australia
Freephone 1300 735 266, Freefax 1300 735 329
Telephone +61 29851 2666, Fax: +61 29851 2695
www.pdl.com.au

