
BGC Fibre Cement

Cavity Batten Note:

Refer to cavity batten layout for batten sizes, types, spacings & fixings.

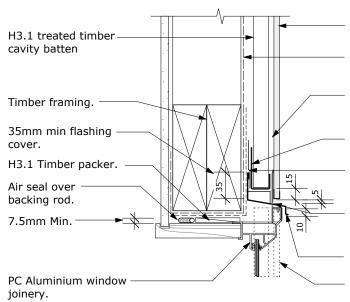

Note. Where Durabarrier™ is used flashing tape must be applied to the entire opening

BGC Duragroove™ with all cut sheet edges sealed before fixing.

Wall underlay dressed into opening with flexible flashing tape to corners.

Duragroove™ adhered to batten with cont. 6mm bead of Bostik Seal 'N' Flex FC (not shown for clarity).

Continuous Vent strip or similar.

Additional layer of flexible flashing tape or wall underlay lapped over head flashing.

3mm slot in Aluminium BGC Horizontal 'h' Mould $^{\text{\tiny{TM}}}$. Seal on completion with 50mm strip of sealant at both ends of flashing. PC Aluminium head flashing with 15° fall with stop ends. BGC Duragroove $^{\text{TM}}$ cladding and batten beyond shown dashed.

BGC Duragroove™ PROFILE

Nov 2011 DATE 1:5 @ A4 SCALE

DETAIL Socket Joint Detail at Window Head on Cavity

DETAIL NO. D 32