


## Maximum spacing of vices (mm)

Line Load	Height Balustrade (mm)	
kN/m	1000	1100
0.75	2600	2360
1.5	1299	1180

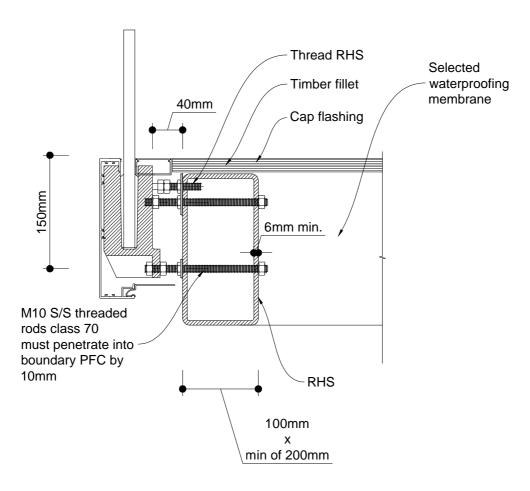

Steel members to be designed by Engineer CPEng. Spacing limited by glass capacity - refer to PS1 certificates

© 2013. The copyright of this document is the property of Glass Vice Limited and shall not be reproduced, copied, loaned or disposed of directly, or indirectly, nor used for any purpose other than that for which it is specifically furnished without prior consent.

GLASS

Glass Vice Clearline Panel Mounted Fixing Detail PFC Edge

All dimensions in millimetres

Scale: Scale 1:5

September 2017

www.glassvice.com Phone +64 9 414 6565 info@glassvice.com

Quick Code: