



**Armstrong**Flooring™

**Kingswood™ 1.5**  
*Hybrid Plank*

Chardonnay Oak

# Kingswood™ 1.5

Hybrid Plank

Kingswood™ 1.5 brings the timeless beauty of authentic hardwood into any space, offering a refined selection of realistic timber designs that suit both modern and traditional interiors. Each plank is crafted to deliver the natural look and feel of genuine wood flooring, adding character and depth to your space.

Blending elegant aesthetics with everyday functionality, the flooring is low maintenance and easy to clean making it perfect for busy households and high traffic environments alike.

Designed for long-lasting performance, Kingswood™ 1.5 is well-suited to a wide range of applications including residential homes and apartments, retail stores, schools, childcare centres, medical facilities, and retirement villages.

## Features & Benefits



**EASY CLEAN**

Low maintenance properties make cleaning easier



**SCRATCH RESISTANT**

Protection so your floors look newer for longer



**STAIN RESISTANT**

For peace of mind for life's mishaps



**ACOUSTIC BENEFITS**

Helps absorb noise for a quieter space



**HIGHLY DURABLE**

Designed for foot traffic and offers longevity



**WATERPROOF SURFACE**

Ideal for spill prone areas such as kitchens\*



**A-LITE CORE**

20% lighter than standard hybrid products



**RESIDENTIAL WARRANTY**

15-Year residential warranty^ Commercial warranty on request

\*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.

^All warranties are in addition to any rights consumers may have under consumer laws. Terms and conditions apply-for full information in respect to the scope of the residential warranty, please see [AU website](#) or [NZ website](#) or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.



Euro Oak

# Kingswood™ 1.5

## Malt Oak

Versatile malt tone creates a timeless look for classic or contemporary interiors.





# Kingswood™ 1.5

Chardonnay Oak

Light oak creates a sense of space and is a good contrast to darker décor.



## Cocoa Oak

A small, white, cylindrical ceramic pot sits on a dark, vertically-grained wooden surface. The pot is filled with a vibrant green, branching succulent plant, likely a species of Euphorbia. The plant's stems are thin and jointed, with small, pointed leaves. The pot is positioned in the upper right quadrant of the frame, casting a soft shadow to its left. The background is a close-up of the dark wood, showing its natural texture and grain.



Kingswood™ 1.5

Colour Palette

Plank size: 1500mm x 182mm x 6mm



Chardonnay Oak

LRV 41.31

Silver Oak

LRV 38.55

Somerset Blackbutt

LRV 33.64

Strong colour variation

Franklin Tassie Oak

LRV 37.23

Strong colour variation



Jamieson Oak

LRV 35.85

Booker Oak

LRV 28.04

Euro Oak

LRV 26.51

Tasmanian Hardwood Classic

LRV 20.11

Strong colour variation

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only - refer to our [Colour Variation Factsheet](#)  
It is recommended you view the actual product in store - visit our [AU Store Locator](#) or [NZ Store Locator](#)

# Kingswood™ 1.5

*Colour Palette*

Plank size: 1500mm x 182mm x 6.5mm



**Blackbutt Traditional**  
Strong colour variation

LRV 24.27



**Spotted Gum Traditional**  
Strong colour variation

LRV 17.06



**Malt Oak**

LRV 15.53



**Cocoa Oak**

LRV 7.31



Silver Oak

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only refer to our [Colour Variation Factsheet](#)  
It is recommended you view the actual product in store - visit our [AU Store Locator](#) or [NZ Store Locator](#)

# Kingswood™ 1.5

Room Visualiser


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

AUSTRALIA

NEW ZEALAND

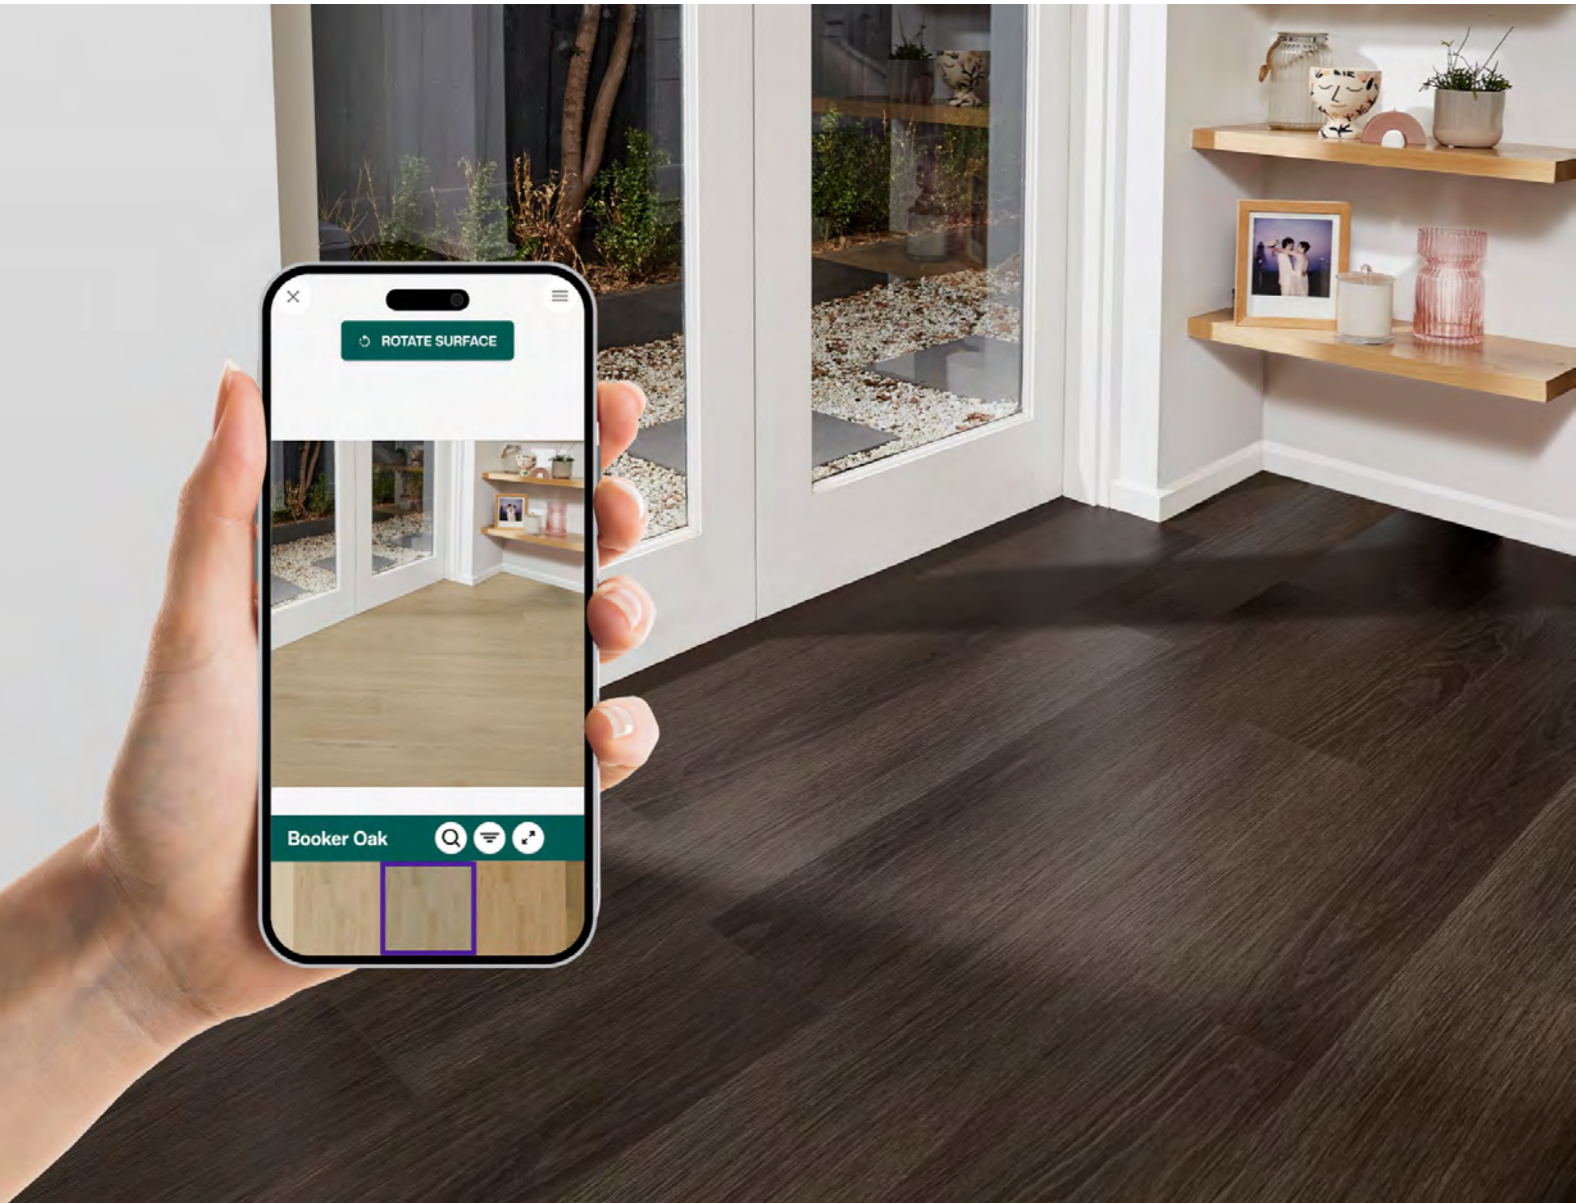

# Kingswood™ 1.5

Technical Data

Product Classification		
Type of floor covering		Hybrid flooring
Classification (Use Area)	ISO 10874	Domestic: 23 (Heavy) Commercial: 33 (Heavy)
Warranty*	Residential Commercial - available upon request	25 years 15 years
<small>*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see <a href="#">armstrongflooring.au</a> or <a href="#">armstrongflooring.co.nz</a> or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.</small>		

Physical Properties		
Surface Treatment		Cerashield® Surface Technology
Colours (Standard)		12
Overall thickness (mm)	ISO 24346	6.5
Wear layer (mm)	ISO 24340	0.55
Bevel		Micro
Core type		A-Lite Core Technology®
Locking system		Angle/Angle - Side Tap (Manufactured under license from Unilin BV)
Backing type		1.50mm XFD Acoustic Backing®
Dimensions (mm)	ISO 24342	1500 x 182
Planks/carton		8
m²/carton		2.18
m²/pallet		109.0
kg/carton		19.7

Installation		
To current AS/NZS 1884 and Armstrong Flooring Hybrid Installation Instructions		
Sustainability		
Global GreenTag		GreenRate Level A
TVOC Emissions		Compliant with Green Building Council low emitting VOC emission rates

Technical Performance		
Slip Resistance	AS 4586 Wet Pendulum (Appendix A)	P3
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m² ≤ 750%min
Acoustic	ISO 10140-3 & ISO 717-2 Impact sound insulation	Ln,w = 40dB <small>(150mm concrete with drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small>
	ASTM E989-21 Impact insulation class	IIC = 70 <small>(150mm concrete and drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small>
	ISO 712-2 Improvement of impact sound insulation	ΔLw = 20dB <small>(200mm concrete slab)</small>
Other		
Colour fastness	ISO 105-B02, Method 3	≥ 6

Accreditation		
Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems		

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit [armstrongflooring.au](#) or [armstrongflooring.co.nz](#)  
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.  
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.



## Learn more

[www.armstrongflooring.au/kingswood1.5](http://www.armstrongflooring.au/kingswood1.5)



[www.armstrongflooring.co.nz/kingswood1.5](http://www.armstrongflooring.co.nz/kingswood1.5)



# ArmstrongFlooring™

### **Australia**

29-39 Mills Road, Braeside VIC 3195  
1800 632 624  
[customerservices@armstrongflooring.au](mailto:customerservices@armstrongflooring.au)  
[www.armstrongflooring.au](http://www.armstrongflooring.au)

### **New Zealand**

39/332 Great North Road, Grey Lynn, Auckland 1021  
0800 449 649  
[customerservices@armstrongflooring.co.nz](mailto:customerservices@armstrongflooring.co.nz)  
[www.armstrongflooring.co.nz](http://www.armstrongflooring.co.nz)