

# Thermakraft™

# THERMAKRAFT

# 215

## Self-supporting bituminous wall and roof underlay

Commonly referred to as 'Building Paper' Thermakraft 215 is a self-supporting, kraft paper based, bituminous building underlay that is suitable for use on roofs and walls in residential buildings. It is vapour permeable, meaning that liquid water from the outside is prevented from penetrating but water vapour from the inside can pass through and escape the building envelope. Thermakraft 215 is easy to install.



# Thermakraft 215

## Self-supporting bituminous wall and roof underlay



### Application Method (Roofing)

Thermakraft 215 is a bituminous building underlay used on roofs in residential buildings.

- Thermakraft 215 can be used for roof construction.
- Run NO longer than 10m.

### Long-run metal roofing/vertical or horizontal installation method

- Fix using stainless steel 8-12mm staples or 20mm flat head clouts, or appropriate proprietary fastenings on timber framed structure. Fixing at 300mm centres. Fixing types and requirements for steel framed structure can be found in the NZ Metal Roof and Wall Cladding Code of Practice.
- Refer to table below to determine underlay support requirements.

Roof Pitch	Span	Underlay Support Required	
		Horizontally Installed	Vertically Installed
≥ 10°	> 1200mm	Yes	Yes
	≤ 1200mm	No	No
< 10° (Min 3°)	> 1200mm	Yes	Yes
	≤ 1200mm	No	Yes

- Thermakraft 215 upper sheet lapped over lower sheets (shiplap) to ensure water is shed to the outer face.

**Note:** Thermakraft 215 can move downwards. To prevent this, it must be 'Captured' by the fastenings at each purlin. Horizontal fix must not be used on purlin distance greater than 1100mm to allow for 150mm laps.

- Must be laid firmly (tight/taut) without creases. All laps either vertical or horizontal must be a minimum of 150mm lap.
- When underlay support is required, Kingspan recommend using Ausmesh Roof Safety Mesh, Ausnet hexagonal netting or Thermastrap 201.
- Thermakraft 215 can be installed above the battens or purlins for profiled metal roof claddings and otherwise in accordance with NZBC E2/AS1.
- If required to achieve a lap seal (refer to NZ Metal Roofing Code of Practice), use Thermakraft Aluband window sealing tape or Thermakraft White General Purpose Tape.
- Thermakraft 215 will provide temporary weather protection during construction, same day coverage

recommended. DO NOT over expose the product to the weather or UV for more than 7 days in any roof applications.

- Thermakraft 215 may be unwound to the full length from the gutter to the ridge. However, when ridge ventilation is required Thermakraft 215 may be terminated or slit at the ridge purlin to allow a free passage of air.
- Thermakraft 215 must NOT overhang the gutter line by more than 20 mm, or if eaves flashings are used, terminate on the upper side of the flashing. More details can be found in the NZ Metal Roof and Wall Cladding Code of Practice.
- Flue penetrations must have a minimum distance of 50mm from Thermakraft 215 (refer to NZ Metal Roof and Wall Cladding Code of Practice 10.11.5).
- Thermakraft 215 must be free of tears and punctures, fit tightly and be lap taped around all penetrations (except flue penetrations), to provide drainage for any condensation, or surface water from leaks.

**Note:** Do not use Aluband on penetrations where Polybutene water pipes have been installed. Refer Pipe Manufacturers for instructions on sealing penetrations.

### Concrete/Metal tile roofing

- Thermakraft 215 must be laid over rafters prior to fixing the tile battens. The maximum span between rafters for Thermakraft 215 is 1200mm. Masonry tile roofs must have antiponding boards in accordance with NZBC E2/AS1 Paragraph 8.2.5.
- Installed Thermakraft 215 may be laid over the top of the antiponding boards and draped into the gutter by no more than 20mm. Antiponding boards must be treated in accordance with E2/AS1 8.2.5.
- Do NOT Run Thermakraft 215 longer than 10m in length.

### Application Method (Wall)

- Fix Thermakraft 215 underlay with the lap line printed side facing the exterior.
- Fix to all exterior walls from below bearers to the top plate. Pull the Thermakraft 215 underlay tight and fix securely to the frame with fasteners such as galvanized Little Grippers, 6mm-8mm staples or 20mm large head galvanized clouts at 300mm centres horizontally and vertically. Additional fasteners should be used around each opening to be cut out. Fixing types and requirements for steel framed structure can be found in the NZ Metal Roof and Wall Cladding Code of Practice.

# Thermakraft 215


## Self-supporting bituminous wall and roof underlay



- When fixing Thermakraft 215 underlay to Steel framing the same procedures applies, use adhesive spray or tape or flat head screws to fasten to the framing or thermal break, the exterior cladding fastenings will act as the permanent fixings.
- Cover all windows and door openings with Thermakraft 215 underlay.
- It is recommended that the Thermakraft 215 underlay is not cut and prepared for window installation until the arrival of the windows. Minimum of 150mm lap is required at joints, all vertical laps must be made over studs. Horizontal laps to be laid ship lap style allowing water to be shed to the outer face of the membrane.
- When windows and doors are ready for installation, the Thermakraft 215 underlay covering the openings should cut at 45° and folded into the opening and securely fastened. Thermakraft window flashing tapes are recommended as the window flashing system.

**Note:** In accordance with NZBC Acceptable Solution E2/AS1, wall underlay must be prevented from bulging into the drained cavity. Where stud spacing is greater than 450mm Thermakraft Stud Strap run horizontal at 300 centres is an acceptable means of prevention.

- Once installed, Thermakraft 215 must not be left exposed to the weather or UV for a maximum of 7 days. Thermakraft 215 underlays will provide temporary weather protection during construction allowing work to continue. Internal linings and insulation must not be installed until the exterior cladding is completed.
- Fastenings behind Brick Veneer Cladding must have an equivalent service life to that of Brick Veneer (50 years). Refer to NZS 3604.
- Make good any forced tears with Thermakraft window flashing tapes. Any large areas which require repair may be covered with a second layer of underlay, a lap of 150mm is required.
- Thermakraft 215 underlay must be installed by a licensed building practitioner.

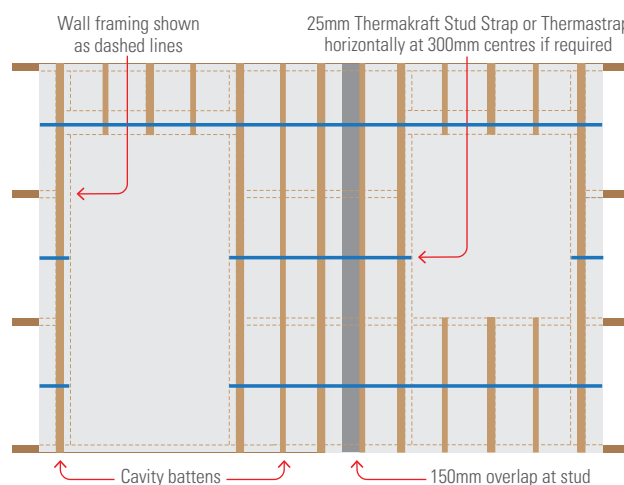

### Application Tips

- Unaffected by LOSP or other solvent based treated timber. However, LOSP or other solvent based treated timber must have sufficient time for the solvent chemical to flash off in a well ventilated area. Recommended minimum 7 days.

### Handling and Storage

Thermakraft 215 underlay must be handled with care to prevent damage such as tearing and roll deformation. Due to the width of the product, care should be taken when installing in windy conditions.

The product must be stored under cover well away from direct moisture, rainfall contact and sunlight (UV). Care should be taken not stack other materials on top of the product.



**0800 806 595**  
**[www.thermakraft.co.nz](http://www.thermakraft.co.nz)**

Thermakraft and Ausmesh products are brought to you by Kingspan Insulation NZ Limited.

