




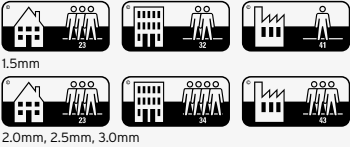










# Standard XL

Attractive, high performance, heavy duty homogeneous floorcovering available in a choice of gauges to suit the application. Featuring a duotone marbleised decoration, Standard XL is available in a palette of practical and versatile shades.

Demonstrating outstanding durability and abrasion resistance, Standard XL is recommended for use in public, institutional and commercial buildings where long life under heavy traffic is required.



	<b>Gauge</b>	EN 428/ISO 24346	1.5mm, 2.0mm, 2.5mm 3.0mm
	<b>Roll Size</b>	EN 426/ISO 24341	1.5mm: 2m x 27.5m = 55m <sup>2</sup> 2.0mm: 2m x 20m = 40m <sup>2</sup> 2.5mm: 2m x 15m = 30m <sup>2</sup> 3.0mm: 2m x 13m = 26m <sup>2</sup>
	<b>Tile Size</b>	EN 427/ISO 24342	2.0mm: 300mm x 300mm = 4.5m <sup>2</sup> 2.5mm: 300mm x 300mm = 3.6m <sup>2</sup> 3.0mm: 300mm x 300mm = 2.97m <sup>2</sup> 2.0mm: 608mm x 608mm = 5.17m <sup>2</sup>
	<b>Total Weight</b>	EN 430/ISO 23997	1.5mm: 2360g/m <sup>2</sup> 2.0mm: 3200g/m <sup>2</sup> 2.5mm: 4200g/m <sup>2</sup> 3.0mm: 5010g/m <sup>2</sup>
	<b>General Performance</b>	EN 649/EN ISO 10581 ASTM F1913 ASTM F1700	Conforms Conforms Conforms
	<b>Use Area</b>	EN 685/ISO 10874	 1.5mm 2.0mm, 2.5mm, 3.0mm
	<b>Reaction to Fire</b>	EN 13501-1 ASTM E662* ASTM E648*	Class Bfl-S1 <450 Class 1 *1.5mm, 2.0mm
	<b>Abrasion Resistance</b>	EN 660-2 EN ISO 10581	Group M Type II
	<b>Slip Resistance</b>	EN 13893 AS 4586	Class DS R9
	<b>Residual Indentation</b>	ASTM F970 (Modified)	Static load 750psi
	<b>Electrical behaviour (body voltage)</b>	EN 1815	≤2kV Classified as 'antistatic'
	<b>Castor Chair (continuous use)</b>	EN 425/ISO 4918	Suitable
	<b>Maritime Usage</b>	Marine Equipment Directive 2014/90/EU* SOLAS 74*	Conforms Conforms *2.0mm
	<b>VOC Emissions</b>	Indoor Air Comfort GOLD AgBB VOC test Floorscore* Finnish M1 Classification* Swedish B.P.D (FLEC test) GBCA/NZGBC Green Star IEQ-VOC	Eurofins certified product Pass Certified Pass Best Class *1.5mm, 2.0mm Compliant 2.0mm
	<b>Responsible Sourcing</b>	BES 6001	Very Good

**Environmentally Preferable Flooring** - Polyflor Standard XL achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare and is GreenTag LCA Rate certified with GreenRate level A - Gold Plus. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Standard XL is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit [www.polyflor.com/sustainability](http://www.polyflor.com/sustainability).

**Hygiene** - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

Polyflor homogeneous PUR, heterogeneous PUR and Polysafe safety flooring ranges are compatible for use with the most commonly used alco-based hand gels. Some alco-based hand gels contain a high concentration of ethanol and to discuss their compatibility with Standard XL, contact Polyflor Customer Technical Services. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty consult **Polyflor Customer Technical Services on +44 (0)161 767 1912, or email [tech@polyflor.com](mailto:tech@polyflor.com)**.  
The data presented is correct at the time of printing. For latest information, please visit our website [polyflor.com](http://polyflor.com).  
**Decoration and shade may vary slightly from the samples shown.**

