



ArmstrongFlooring™

Kingswood™ Select Oak
Hybrid Plank

Chardonnay Oak

Kingswood™ Select Oak

Hybrid Plank

Bring timeless elegance to your interiors with Kingswood™ Select Oak, a premium hybrid flooring range featuring beautifully crafted oak designs that replicate the natural warmth and texture of real timber. Each plank is thoughtfully designed to enhance both contemporary and classic spaces.

With a generous 1.8 metre plank length, this flooring creates a seamless, open feel making it ideal for larger layouts and open-plan living. The extended size adds visual depth and sophistication, making it perfect for residential and commercial interiors alike.

Kingswood™ Select Oak features a robust 0.55mm wear layer offering superior durability, along with easy maintenance for everyday practicality. Whether it's for a home, apartment, retail space, school, healthcare facility, or retirement living, this hybrid flooring offers a stylish, long-lasting solution that balances beauty with performance.

Features & Benefits



EASY CLEAN

Low maintenance properties make cleaning easier



SCRATCH RESISTANT

Protection so your floors look newer for longer



STAIN RESISTANT

For peace of mind for life's mishaps




ACOUSTIC BENEFITS

Helps absorb noise for a quieter space



HIGHLY DURABLE

Designed for foot traffic and offers longevity



WATERPROOF SURFACE

Ideal for spill prone areas such as kitchens*



A-LITE CORE

20% lighter than standard hybrid products



RESIDENTIAL WARRANTY

25-Year residential warranty^ Commercial warranty on request

*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.

^All warranties are in addition to any rights consumers may have under consumer laws. Terms and conditions apply-for full information in respect to the scope of the residential warranty, please see [AU website](#) or [NZ website](#) or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.



Cocoa Oak

A top-down photograph of a small, round, reddish-brown ceramic bowl filled with a vibrant green salad. The salad consists of various leafy greens, including some with purple-tinged leaves, and is garnished with small, dark, round items, possibly olives or berries. The bowl is placed on a dark, textured surface with a prominent wood-grain pattern. The lighting is soft, creating a subtle shadow to the left of the bowl.





Kingswood™ Select Oak

Chardonnay Oak

Light and breezy oak to create
a sense of space and calm to
any environment.



Kingswood™ Select Oak

Colour Palette

Plank size: 1830mm x 182mm x 6.5mm



Chardonnay Oak

LRV 41.86

Jamieson Oak

LRV 34.3

Sierra Oak

LRV 38.8

Limestone Oak

LRV 33.01



Pils Oak

LRV 29.1

Booker Oak

LRV 27.04

Honey Oak

LRV 34.04

Euro Oak

LRV 26.24

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only - refer to our [Colour Variation Factsheet](#)
It is recommended you view the actual product in store - visit our [AU Store Locator](#) or [NZ Store Locator](#)

Kingswood™ Select Oak

Colour Palette

Plank size: 1830mm x 182mm x 6.5mm



Malt Oak

LRV 15.14



Cocoa Oak

LRV 6.78



Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only refer to our [Colour Variation Factsheet](#)
It is recommended you view the actual product in store - visit our [AU Store Locator](#) or [NZ Store Locator](#)

Siera Oak


Kingswood™ Select Oak

Room Visualiser

Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

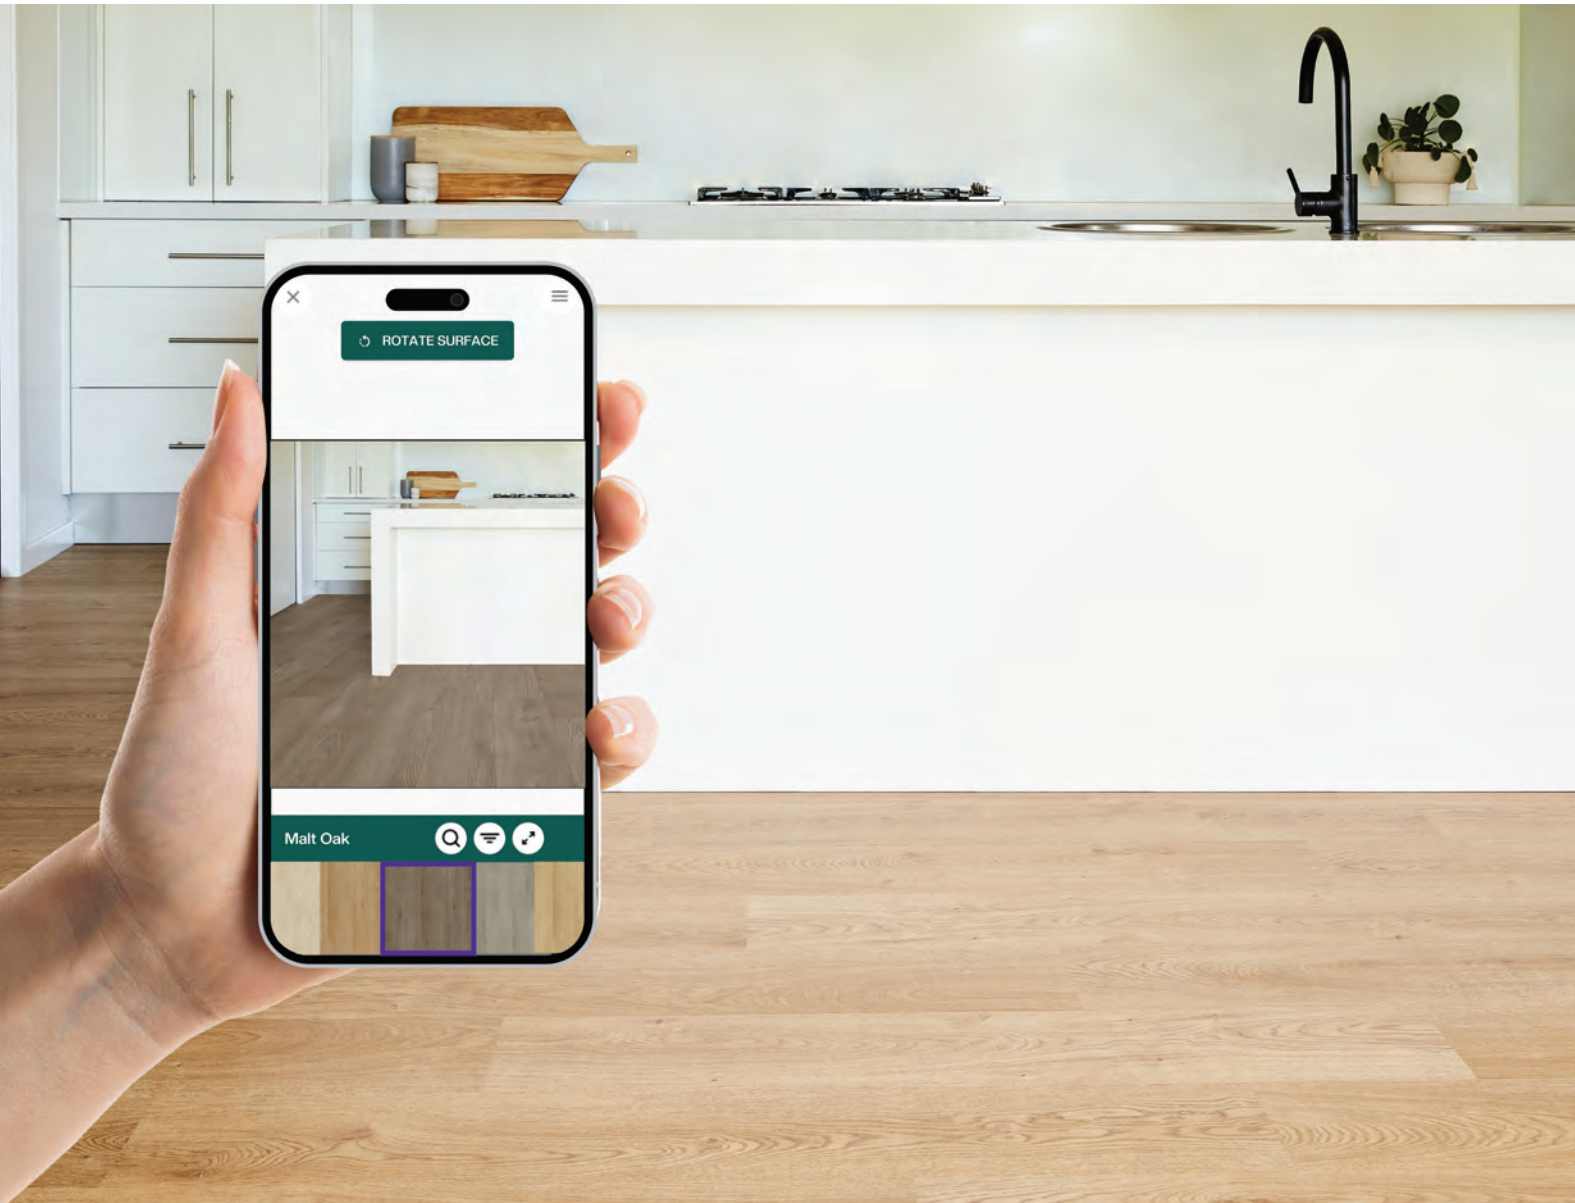

Kingswood™ Select Oak

Technical Data

Product Classification		
Type of floor covering		Hybrid flooring
Classification (Use Area)	ISO 10874	Domestic: 23 (Heavy) Commercial: 33 (Heavy)
Warranty*	Residential Commercial - available upon request	25 years 15 years
<small>*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see armstrongflooring.au or armstrongflooring.co.nz or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.</small>		

Physical Properties		
Surface Treatment		Cerashield® Surface Technology
Colours (Standard)		10
Overall thickness (mm)	ISO 24346	6.5
Wear layer (mm)	ISO 24340	0.55
Bevel		Micro
Core type		A-Lite Core Technology®
Locking system		Angle/Angle - Side Tap (Manufactured under license from Unilin BV)
Backing type		1.50mm XFD Acoustic Backing®
Dimensions (mm)	ISO 24342	1830 x 182
Planks/carton		6
m²/carton		2
m²/pallet		130.0
kg/carton		18.3

Installation		
To current AS/NZS 1884 and Armstrong Flooring Hybrid Installation Instructions		
Sustainability		
Global GreenTag		GreenRate Level A
TVOC Emissions		Compliant with Green Building Council low emitting VOC emission rates

Technical Performance		
Slip Resistance	AS 4586 Wet Pendulum (Appendix A)	P3
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m² ≤ 750%.min
Acoustic	ISO 10140-3 & ISO 717-2 Impact sound insulation	L _{n,w} = 40dB (150mm concrete with drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)
	ASTM E989-21 Impact insulation class	IIC = 70 (150mm concrete and drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)
	ISO 712-2 Improvement of impact sound insulation	ΔL _w = 20dB (200mm concrete slab)
Other		
Colour fastness	ISO 105-B02, Method 3	≥ 6

Accreditation		
Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems		

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.



Learn more

www.armstrongflooring.au/selectoak



www.armstrongflooring.co.nz/selectoak



ArmstrongFlooring™

Australia

29-39 Mills Road, Braeside VIC 3195
1800 632 624
customerservices@armstrongflooring.au
www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021
0800 449 649
customerservices@armstrongflooring.co.nz
www.armstrongflooring.co.nz