

## Vapastop® Tape DS

### Double Sided Cloth Tape

#### Application

Vapastop® Tape DS is a bleached cotton cloth coated on both sides with a heavy layer of aggressive synthetic rubber adhesive. It is ideal for situations where the tight butting together of product, invisibility of taped joints or an uninterrupted finish is desired. It can also be used to create an effective seal when joining two vapour barrier products together. It is the preferred solution for joining Pink® Batts® foil faced Building Insulation Blanket.


It is suitable for use in the following applications:

- Foil faced insulation
- Aesthetic finish without visible presence of tapes
- Tightly butting product together for virtually seamless joints
- Uninterrupted finish of faced product

#### Features and Benefits

- Double Sided – Inconspicuous use of tapes when joining Building Insulation Blanket, carpet, linoleum and tiles
- High Tack Adhesive – Pressure sensitive for good strength and high shear resistance
- Low Temperature Adhesive – Allows tape to gain full adhesion at low temperatures
- Vapour Barrier Component – Creates an effective seal when joining two vapour barrier products

#### Product Description

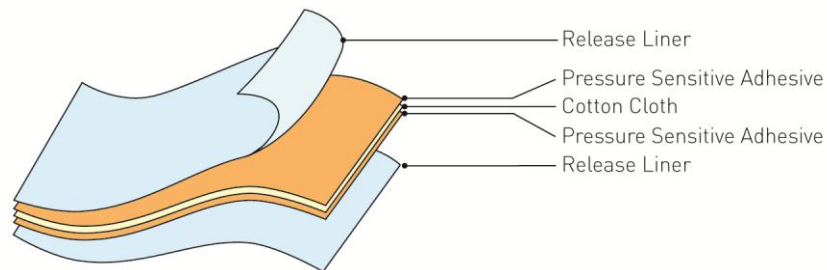

#### Technical Data

|                                 |                        |
|---------------------------------|------------------------|
| Backing Material                | Cotton cloth           |
| Adhesive Type                   | Synthetic rubber/resin |
| Tensile Strength                | 120 N/25mm             |
| Adhesion To Steel               | 28 N/25mm              |
| Elongation At Break             | 5.8%                   |
| Total Thickness Without Liner   | 300 Microns            |
| Recommended Service Temperature | -15 to 65°C            |

#### Installation

##### General

- For best adhesion ensure tapes are warmed to over 10°C before application (e.g. tape should not be cold to the touch)
- Prepare the surface to be joined by ensuring it is free of any excess moisture or debris
- Apply the tape *between* the lap surfaces. Both tape surfaces must be in contact with each of the adjoining foil surfaces
- Once tape is applied rub firmly to ensure firm adhesion (the use of a squeegee is recommended)

## Durability

When used, installed and maintained in accordance with the requirements outlined in this datasheet, Vapastop® Tape DS will meet or contribute to meeting the following provisions of the NZBC:  
 NZBC Clause B2: Durability Meets the requirements of NZBC B2.3.1 a) 50 years and NZBC B2.3.1 b) 15 years

## Specification Notes

Product required: Vapastop® Tape DS Double Sided Cloth Tape  
 Product Specification

| Description       | Product Code | Roll Size  | Nominal Thickness | Rolls/Carton |
|-------------------|--------------|------------|-------------------|--------------|
| Vapastop® Tape DS | 780008       | 48mm x 23m | 300 microns       | 36           |

## Storage

Vapastop® Tape DS must be protected against damage and weather. Tape must be stored under cover in a clean, dry environment. Do not crush product



Distributed by:  
 Tasman Insulation New Zealand Limited  
 9-15 Holloway Place, Penrose,  
 Auckland,

(1) This data sheet may have been superseded. Please refer to [www.pinkbatts.co.nz](http://www.pinkbatts.co.nz) for the most current information. This datasheet supersedes all previous versions. (2) Tasman Insulation New Zealand Ltd retains the right to change specifications without prior notification. (3) Do not use this product for any application not detailed in this data sheet. (4) Recommendations and advice regarding the use of this product are to be taken as a guide only. The purchaser should ascertain the suitability of this product for the particular end-use situation intended and when used in conjunction with other products. (5) Consult Tasman Insulation New Zealand Ltd for further information. (6) All claims about this product are subject to any variation caused by normal manufacturing process and tolerances. (7) The liability of Tasman Insulation New Zealand Ltd and its employees and agents for any errors or omissions in this data sheet or otherwise in relation to the product is limited to the fullest extent permitted by law. Except where the consumer acquires the goods for the purposes of a business, any rights a consumer may have under the Consumer Guarantees Act are not affected. (8) This information is provided without prejudice to Tasman Insulation New Zealand Ltd standard terms and conditions of sale.

*Please consider the environment before printing this document*

For further information visit [www.pinkbatts.co.nz](http://www.pinkbatts.co.nz) or call 0800 PINK BATTES (746 522)