

MANROSE CLASSIC INLINE HYPER FAN

Duct Size	Model	Switching	Performance	Order Code
150mm	Hyper150	Standard	109 l/s, 394m ³ /hr	FAN0085

- This high efficiency inline fan is designed to provide high levels of extraction.
- The ball bearing motor prolongs the life of the motor.
- Includes 1.3m lead and 3 pin plug.
- Supported by a 5 year warranty.



Hyper 150

Switching Options

1. Standard - Operates from remote switch (not supplied).

NOTE: All fan flow rates quoted are free air delivery.

BELIEVE THE HYPE

New Zealand's best selling, most trusted and trade preferred fan is now better than ever



Manrose HYPER150


- ✓ Stronger: 394 m³/hour
- ✓ Quieter: 38 dB(a)
- ✓ MORE ENERGY EFFICIENT

THE IMPROVED HYPER FAN IS ALSO USED IN THESE SHOWER FAN KITS:

- Manrose ProSeries Shower Fans Kits inc FAN0618
- Manrose ProSeries Extract-A-LED Shower Fan Kit inc FAN5375
- Manrose Classic Shower Fan Kits inc FAN0101
- Manrose Classic Extract-A-Lite Kits inc FAN0803
- Manrose Classic Extract-A-LED Kits inc FAN5369
- HeatTrans One Room Kit FAN0325

DIMENSION INFORMATION (MM)


Model	A	B	C	D
Hyper150	200	143	170	185

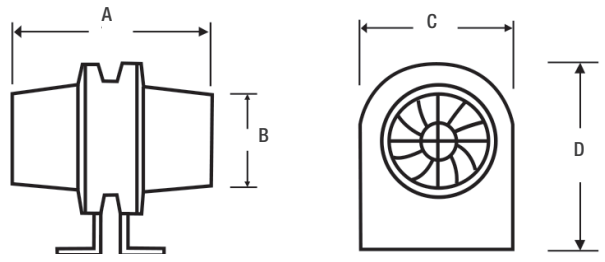

Dimensions

TECHNICAL SPECIFICATION & PERFORMANCE DATA

Model	Hyper150
Power	220-240 V ~ 50Hz
Fan Performance	109 l/s, 394m ³ /hr
Fan Wattage	27W
Maximum Pressure	120 Pa
Sound Level	38dB
IP Rating	IPX2

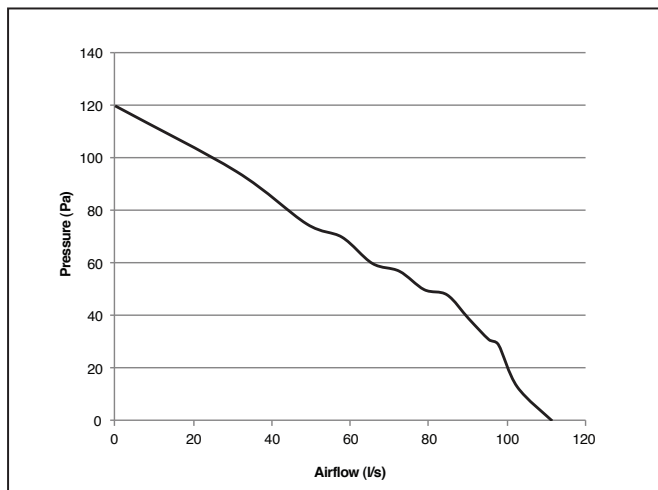

Performance - Hyper150