
BGC Fibre Cement

Cavity Batten Note:

Refer to cavity batten layout for batten sizes, types, spacings & fixings.

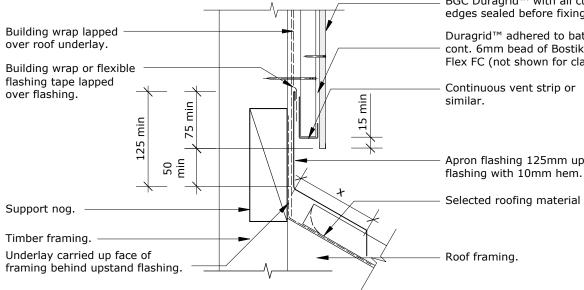

BGC Duragrid $^{\text{\tiny{TM}}}$ with all cut sheet edges sealed before fixing.

Duragrid™ adhered to batten with cont. 6mm bead of Bostik Seal 'N' Flex FC (not shown for clarity).

Continuous vent strip or

Apron flashing 125mm upstand

Selected roofing material with upturn.

X = Refer to NZBC E2 / AS1 Table 7 forflashing cover requirements.

BGC Duragrid™ PROFILE

Apron Roof Flashing DETAIL

DATE SCALE

Nov 2011 1:5 @ A4

DETAIL NO. D 21