


# SEMIDUCT

## SEMI RIGID DUCTING

Diameter (mm)	Length (m)	Pack	NUDE	INSULATED R0.6*
			Order Code	Order Code
100	1.5	Boxed	DCT0333	
	3	Loose	DCT0114	
125	1.5	Boxed	DCT0334	
	3	Loose	DCT0115	
150	1.5	Boxed	DCT0335	
	3	Loose	DCT0116	DCT2590
200	3	Loose	DCT0117	DCT2589
250	3	Loose	DCT0118	DCT2591
300	3	Loose	DCT0119	DCT3695
350	3	Loose	DCT0120	DCT3696
400	3	Loose	DCT0477	DCT3697

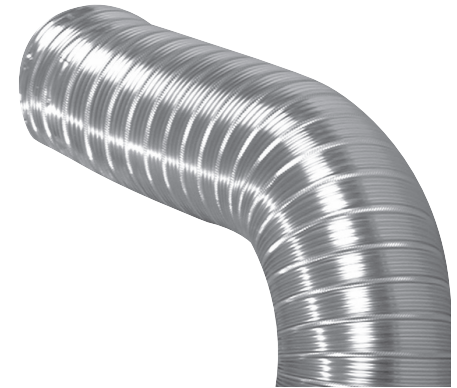

Semiduct Semi Rigid Ducting

SEMIDUCT is also known as semi-rigid aluminium ducting is a lightweight, flexible but strong corrugated aluminium duct. It is spiral wound with a unique interlocked and knotted continuous seam. It is self supporting over longer lengths and generally only needs fittings or mechanics at each end for support.

- **Fully complies to the New Zealand Building Code.**
- **DUCT CORE:** Pure aluminium spiral wound with a unique interlocked and knurled continuous seam.
- Holds shape, self supporting.
- **TEMPERATURE RANGE:** Maximum: +250°C, Minimum: -30°C.
- **COLOUR:** Silver.

Sold as compressed packaged form. \*Sold in kitset form - some assembly required.