


BGC



Fibre Cement

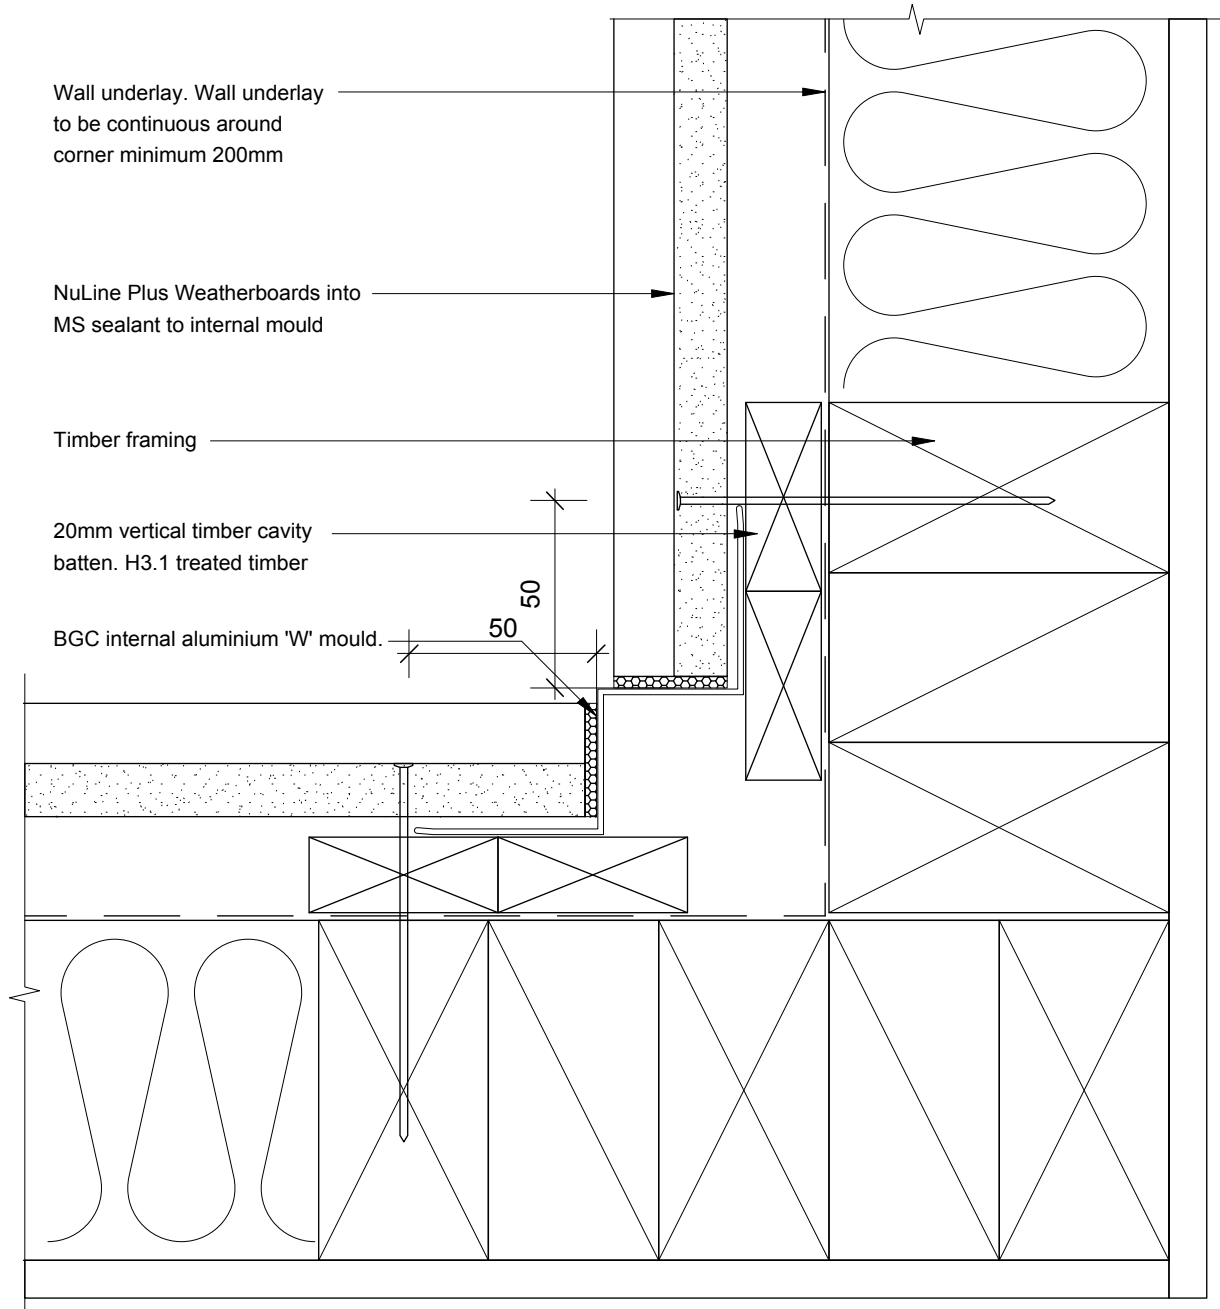

Wall underlay. Wall underlay to be continuous around corner minimum 200mm

NuLine Plus Weatherboards into MS sealant to internal mould

Timber framing

20mm vertical timber cavity batten. H3.1 treated timber

BGC internal aluminium 'W' mould.

50
50

PROFILE NuLine™ Plus Weatherboards
DETAIL Internal Corner Detail with BGC Profile Cavity Construction

DATE Sep 2012
SCALE 1:2 @ A4
DETAIL NO. NU-12