



MASONS
Designed Smart, Built Tough.

Admix

Plastaseal



MASON'S™ Plastaseal has been specifically formulated as a surface preparation for use with cement based plaster. MASON'S™ Plastaseal acts as an extra bond between plaster and Surface.

Uses

MASON'S™ Plastaseal's unique structure imparts the above benefits to clay bricks, fibre-cement sheets, concrete tilt panel and gib board. It may be used on both exterior and interior work.

Preparation


Ensure that all surfaces are clean, dry and free of dust and loose particles of plaster and cement. MASON'S™ Plastaseal cleans up with fresh water.

Application

May be applied by brush or roller although spray application by back pack or LVHP airless is recommended. Apply at 12-15m² per litre.

Care should be taken to ensure overspray does not settle onto glass or aluminium sidings and doors.

Allow at least 30 minutes drying before applying plaster or mortar and at least 60 minutes before painting.

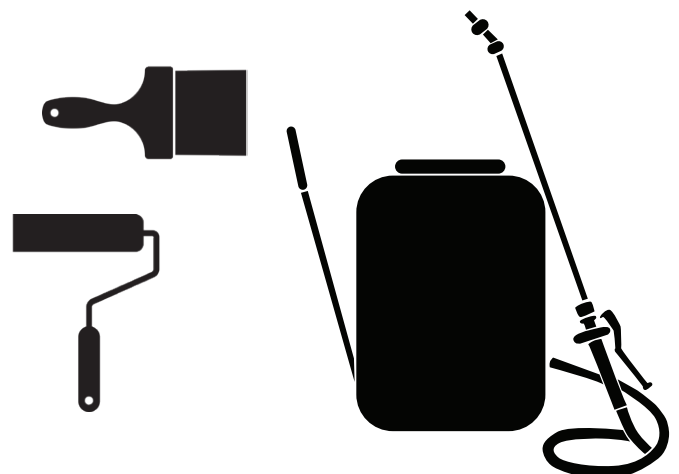



MASONS
Designed Smart, Built Tough.

Admix

Plastaseal

Pre-Cautions

Do not apply in damp conditions or when temperature is below 10°C. If using PlastaSeal as a sealer over new plaster prior to painting allow at least 7 days curing of the plaster prior to painting.

Technical Service

For your nearest stockist or additional technical information on MASONS™ products and our wide range of sealing compounds, concrete admixtures and additives for the construction industry, contact MASONS™ on 0800 522 5333.

The above information is based on our best knowledge and presented in good faith and we believe it to be true and accurate, however, due to the variable nature of application the suitability of the product for the intended use is the sole responsibility of the user.

Description	Size	Code
PlastaSeal 5 Lt	5 Lt	PS005
PlastaSeal 20 Lt	20 Lt	PS020