


LOFT LADDER

FEATURES

- 1 Flick Fit installation - Pre installed brackets for installation from below
- 2 Continuous seal around trapdoor reduces heat loss
- 3 Pre-fitted handrail as standard
- 4 White 36mm thick insulated trapdoor, with U-Value of 1.1W/m².K as standard*
- 5 Unique detachable ladder - enables one person to install
- 6 Recessed locking system
- 7 Slip resistant treads
- 8 Dove tail joints on all treads
- 9 Scratch resistant protective feet

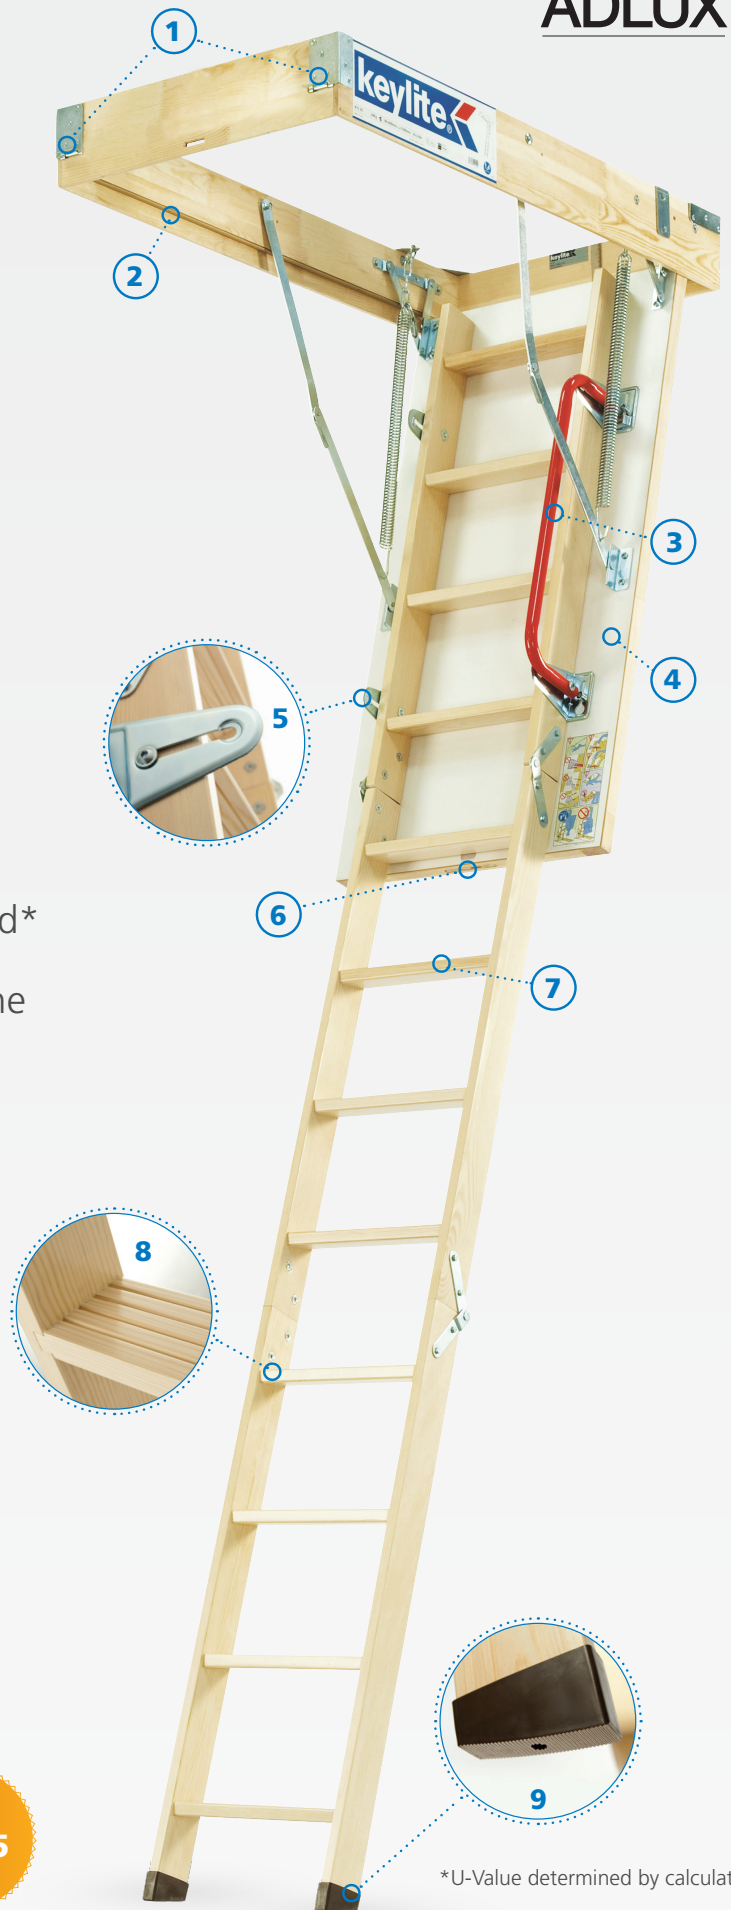

3 Year **Guarantee**





The mark of responsible forestry
FSC® C043999



*U-Value determined by calculation

3 SEGMENT LADDERS

4 SEGMENT LADDERS

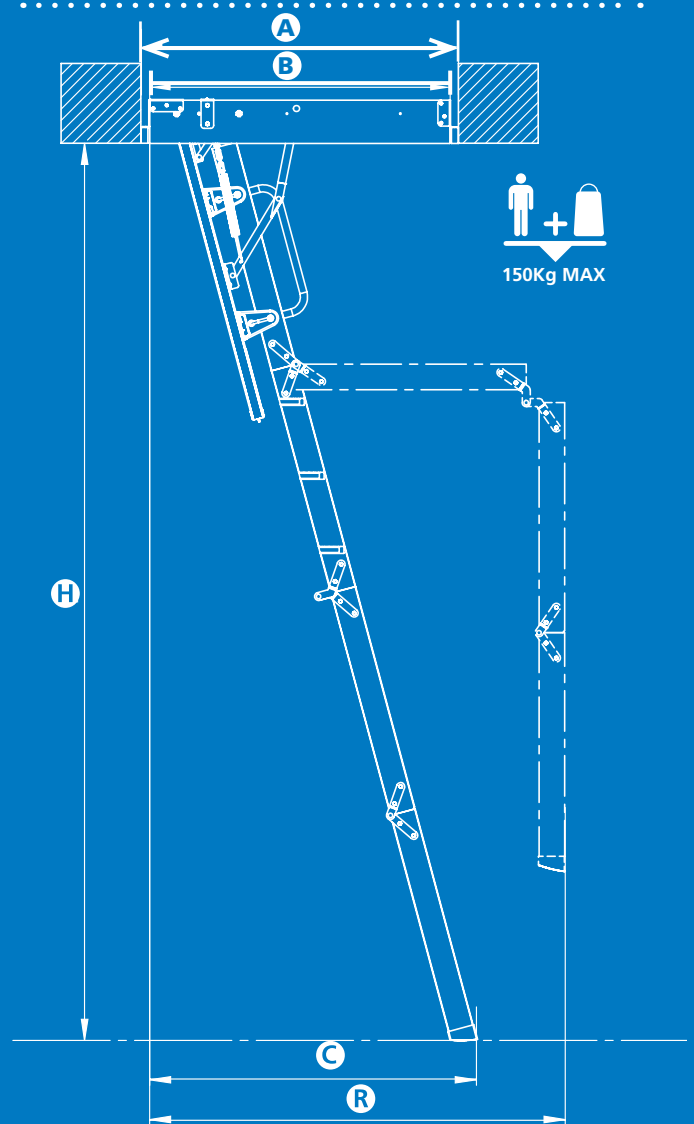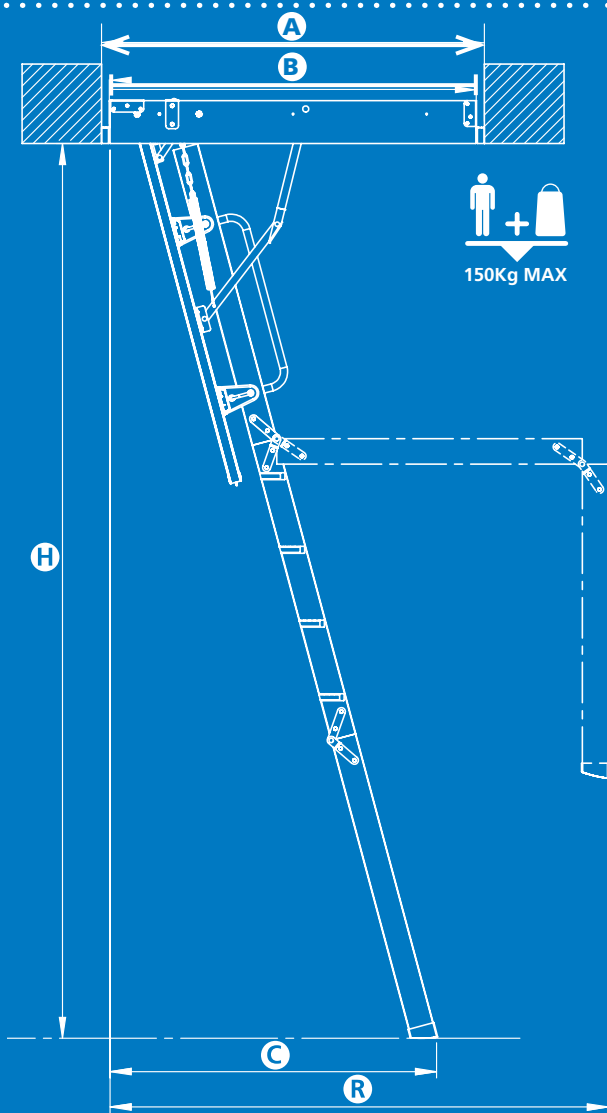

	KYL01	KYL05	KYL06
A Ceiling opening dimension (mm)	550 x 1000	600 x 1200	600 x 1200
B Frame external dimension (mm)	530 x 940	580 x 1140	580 x 1140
Number of ladder sections	4	3	4
C (mm)	1025	1025	1145
R (mm)	1300	1565	1605
H (mm)	2800	2800	3200



Keylite New Zealand Distribution

ADLUX - The Skylight & Roof Access Company
36 Olive Road, Penrose, Auckland
P.O. Box 13 866, Onehunga, Auckland, 1643

T: +64 9 636 6866
F: +64 9 636 6846
E: sales@adlux.co.nz

www.adlux.co.nz