

NZAC00138 Dulux Acratex Venetian Plaster Soap Of Marseille

Introduction

Part A
N4100096


Description and Image

Soap of Marseille (Savon de Marseille) is a special water based protective coating especially made for porous surfaces such as Venetian plaster, stone, tile or any porous surface. This natural product will protect the surface from dust and dirt.

Protects the surface and allows the surface to remain breathable suitable for interior use only.



Standards And Certifications



Certified System: Quality
ISO 9001



Certified System:
Environment ISO 14001

Standards and Certifications

For details on these standards and certifications please reference the 'Approvals' section at the beginning of this document. Please contact your DuluxGroup representative for specific information on ESD credits / points.

Uses


Venetian Plaster Soap of Marseille is particularly suited to the preservative restoration of old historical buildings such as churches, palaces or villas, both interior and exterior; to create surfaces of elevated aesthetic value in all settings whether modern or classic: halls, stairways, bathrooms, living rooms; to add a touch of elegance to the most refined public places such as hotels, restaurants, shops, etc that have been finish using Dulux Acratex Venetian Plaster range.

Typical Specifications

Typical System

Title:
AUAC00612 Dulux Venetian Plaster Soap Of Marseille / Modello / Quartz Primer on New Cement

Preparation Guide
Refer Full Du Spec specification Sheet
AUAC00612 Dulux Venetian Plaster Soap Of Marseille / Modello / Quartz Primer on New Cement render [Interior]

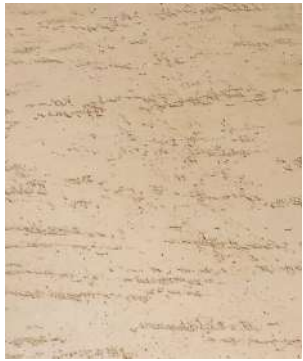

Coat	Product	Spread Rate (m ² /L):	WFT (micron):	DFT (micron)
1st Coat	VENETIAN PLASTER QUARTZ PRIMER	8	125	54
2nd Coat	VENETIAN PLASTER MODELLO	2.632	370	271
4th Coat	VENETIAN PLASTER SOAP OF MARSEILLE	16	50	0

Minimum System DFT: **325**

Notes:
Venetian Plaster Modello Concrete can be finished a a number of Traditional and imaginative was to product a number of effects.
E.g. Travertino a traditional vertical or horizontal scratch finish


Typical Properties

V.O.C. Content
0.1

Clean Up
water

Sizes
2kg

Meets ECNZ V.O.C. Requirements?
Yes
Total Volatile Organic Content (TVOC) values are calculated in accordance to the stated methodology within Green Star Technical Manuals. The TVOC content is theoretically calculated as the sum total of the known VOC values of the product's raw material components. These materials include the base paint plus additional low VOC tinter required for non-factory packaged colours.

Application Methods
 **Trowel**
Soft Pad or non woven cloth.

Specifications	Solids by Volume		
	<input type="text" value="71.36"/>		
	Min	Max	Recommended
Wet Film Per Coat (microns)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>
Dry Film Per Coat (microns)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>

Theoretical Spread Rate (m ² /L)	<input type="text" value="22.2"/>	<input type="text" value="10.99"/>	<input type="text" value="14.79"/>
Drying Time			
Recoat Time (min/hours)	Min <input type="text" value="0"/>	Max <input type="text" value="0"/>	Recommended <input type="text"/>
<p>Typical Property Notes</p> <p>Note;</p> <p>22.20 m²/L equates to 0.030 kg/m² per coat</p> <p>14.79 m²/L equates to 0.045 kg/m² per coat OR approx 29.6m² per pail per coat</p> <p>10.99 m²/L equates to 0.060 kg/m² per coat Lower spread rates for more patterned finishes</p>			

Application Guide	
<p>Surface Preparation</p> <p>Exterior not suitable.</p> <p>Interior:</p> <p>Preparation: on civil plaster or old mineral paints as long as they are not powdery, are in good condition and sufficiently rough, apply directly. On supports of the type: gesso, gypsum, plasterboard, old synthetic or powdery paints, stucco smoothing</p>	

Health and Safety	
<p>SDS Number</p> <p>DLXNZ7EN002899</p>	<p>SDS Link</p> <p>View SDS Link</p>
<p>Using Safety Precautions</p> <p>Keep out of reach of children. Avoid contact with skin and eyes or breathing vapour. Wear waterproof gloves and safety glasses. Use only in well ventilated areas. Wash hands after use.</p>	
<p>Please refer to SDS Link. In case of emergency, please call 0800 220 770.</p>	

Precautions and Limitations

This product data sheets shall be read in conjunction with the Dulux specification.

To ensure colour uniformity and for optimum performance, Dulux recommend a full coating system including a Membrane topcoat.

For **all** systems, the Texture &/or Base Coat should be tinted in accordance with Tint Guide to the specified topcoat colour (or a colour as close as possible to the specified colour as product and Acratex tint rules allow).

Important: Not all colours are suitable for exterior use.

Ensure that you have adequate tinted stock to complete the job in one application.

All material must be thoroughly cross-mix to ensure tint uniformity.

It is recommended to hold a volume of finish material for future maintenance touch-ups

Practical spreading rates will vary from quoted theoretical figures depending on substrate porosity, surface roughness, overspray losses, application methods and environmental conditions (e.g. wind).

- Do not apply paint if Relative Humidity is above 85% or temperature is within 3°C of Dew Point.
- Do not apply if the surface temperature is greater than 40°C or below 10°C, or likely to fall below 10°C during the application or drying period.
- Dry times apply to a single coat at recommended spread rate and at 25°C and 50% Relative Humidity
- Allow longer times under cool, moist, or still conditions and or when applied at high film builds.
- Protect from dew, rain and frost for 48 hours when apply at the recommended spread rate.
- Avoid application in hot, windy conditions or on hot surfaces cool the surface by hosing with water and paint the cool damp surface.
- The exterior texture coatings should be cleaned on a regular basis.
- This will help maintain your overall aesthetic appearance and preserve your Acratex Texture coating system.

Cleaning once every year will remove light soil as well as grime and airborne pollutants refer Dulux Acratex Care & Maintenance Guide.

Transport and Storage

Line Shade /Pack A

N4100096

Size:

2.5L

Weight:

2kg

Further Information

Venetian Plaster Web Page

Disclaimer

This Data Sheet is copyright to DuluxGroup (Australia) Pty Ltd and/or DuluxGroup (New Zealand) Pty Ltd (collectively, 'Dulux'). It may not be varied or altered without the prior written consent of Dulux, and if it is, Dulux has no responsibility or liability for those variations.

Unless Dulux has provided you with a customised, project-specific specification, this Data Sheet does not represent that any particular product or product system will be suitable for your project.

Any information provided in this Data Sheet is given in good faith and is believed by Dulux to be correct at the time of publication. Products and coating systems can be expected to perform as indicated in this Data Sheet, provided the substrate is in good condition, the coatings are applied by a suitably experienced and skilled applicator, and the preparation, application and maintenance is followed strictly as set out in this Data Sheet, and as recommended on the applicable Safety Data Sheets for the relevant products, available from www.duspecplus.co.nz. Climatic conditions at application time can affect product suitability and performance.

The correct colour or colour match is the responsibility of the applicator. Colours will change over time and Dulux does not guarantee that the same colour newly mixed will match a colour applied earlier which has been subjected to weathering or other change elements. No product colour is guaranteed against colour change.

Where any liability of Dulux in respect of this Data Sheet cannot by law be excluded, Dulux's liability is limited, as permitted by law and at Dulux's option, to resupply of the relevant products or services or to reimbursing the cost of those products or services.

WHERE LEAD MAY BE PRESENT: The asset manager is responsible for verifying the presence of lead and determining whether to remove or encapsulate the lead. If lead is present, the work must be done in strict accordance with AS/ NZS 4361 Parts 1 and 2 and Worksafe Australia or New Zealand guidelines.