

# PEARLAZZO PUR DISTINCTIVE FLOORING

**POLYFLOR™**  
COVERING THE WORLD

# PEARLAZZO PUR DISTINCTIVE FLOORING

## **Proven pedigree**

For attractive, high performance, heavy duty floorcoverings with a polyurethane reinforcement the Polyflor homogeneous PUR collections - Prestige PUR, Classic Mystique PUR, Mystique PUR and 2000 PUR - are the perfect choice.

## **The latest addition - Pearlazzo PUR - is no exception.**

Designed for the modern commercial environment, Pearlazzo PUR continues the theme of combining great style, low maintenance and toughness, which specifiers have come to expect from the existing Polyflor homogeneous PUR family of products.

Available in a palette of 24 contemporary colours, ranging from pale neutrals through to more intense shades, Pearlazzo PUR features a unique multi-flake decoration giving it a distinct appeal.

**A range of distinction.**



DISCOVER UP CLOSE THE NEW AND  
EXCLUSIVE DECORATION OF  
**PEARLAZZO PUR**



# A FUSION OF ELEMENTS

**Harmony can be defined as 'forming a pleasing or consistent whole'.**

The harmonious decoration of Pearlazzo PUR has been achieved by blending tonal chips and pearlescent flakes fused onto a solid base colour to create a truly unique appearance.

The pearlescent flakes add a depth and diversity to the decoration and the complementary tonal chips add to the overall non-directional decorative appeal.

## **Fusion flooring**

The use of colour and decoration gives a bespoke identity to any location. The choice of floorcovering can enhance the design scheme adding character to a modern, lively building.

Available in 24 shades Pearlazzo PUR now gives you an extensive colour choice and a unique decorative option.







# STYLE AND ELEGANCE

Pearlazzo PUR enables you to bring a special brand of style and elegance to any commercial environment.


To maintain the open context of a space featuring a strong architectural design, subtle greys and neutrals from the contemporary Pearlazzo PUR palette are used to maximise the area.

With a palette of 24 shades, there is a real opportunity to mix and match base colours of your choice, unified by the unique decorative look of Pearlazzo PUR.

The flooring also features homogeneous monolayer construction for even wear and 100% useful life, to ensure that its hard-wearing properties and decoration last throughout the whole product thickness.

Polyflor homogeneous PUR ranges demonstrate outstanding durability and abrasion resistance. Pearlazzo PUR achieves the highest wear rating Group T (EN 660 Part 2) and the Use Area Classification of 23/34/43.

PEARLAZZO  
DISTINCTIVE  
FLOORING

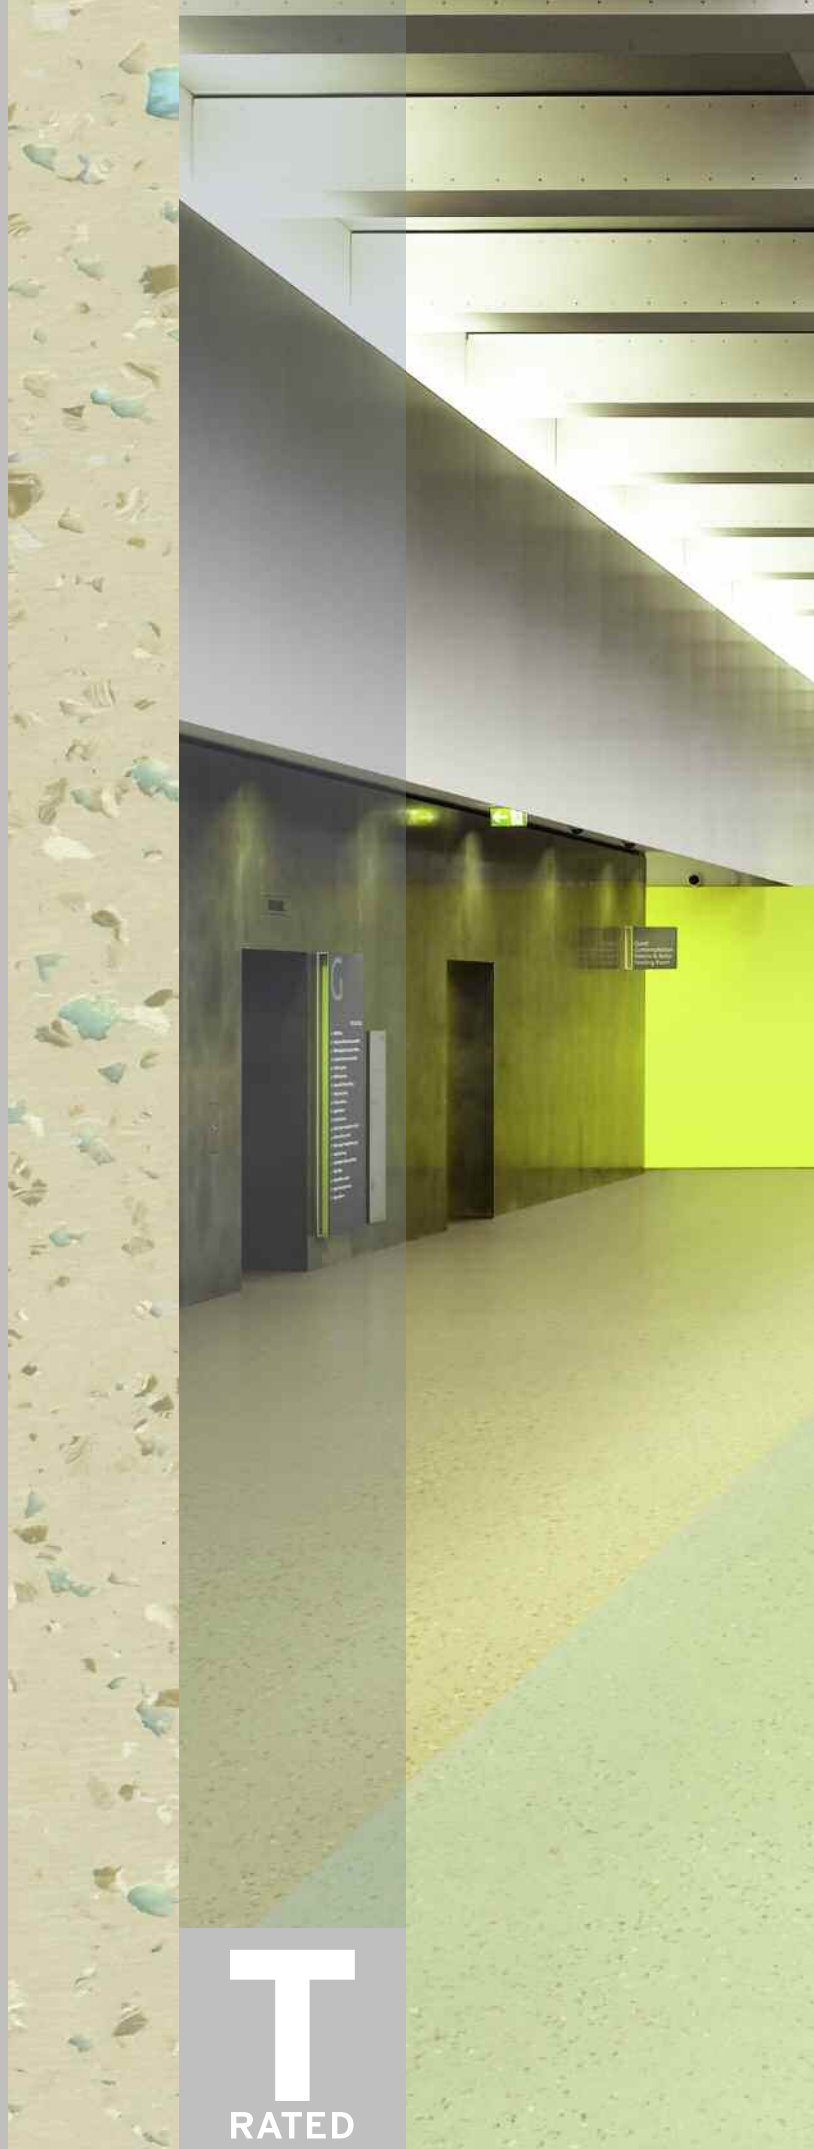

**T**  
RATED



CHOOSE COLOURS OF A SIMILAR DENSITY TO  
CREATE **A BALANCED LOOK**





**CREATE BOLDER** AND MORE DRAMATIC SCHEMES BY USING A STRONG COLOUR AGAINST NEUTRAL SHADES





## OPTIMUM APPEARANCE

Link corridors and walk-ways, as areas of high circulation, can experience intense heavy traffic throughout the day.

As with all Polyflor homogeneous PUR ranges, hardwearing Pearlazzo PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.

This protection ensures that the intensity of the maintenance and overall cleaning costs are significantly reduced, with savings of up to 48% achievable compared to untreated vinyl flooring.

Regular and well planned maintenance keeps the floorcovering in pristine condition, reduces wear and ultimately improves the life expectancy of the floorcovering.

A combination of vibrant and neutral shades from Pearlazzo PUR complements the existing décor creating a dynamic space.





PEARLAZZO PUR  
DISTINCTIVE  
FLOORING



# A WORLD OF COLOUR AT YOUR FEET

Recognising the importance of colour in the design process, Pearlazzo PUR offers you a choice of 24 shades to create outstanding interior design schemes.

To see the creative flexibility of Pearlazzo PUR, visit [www.polyflor.com/distinctiveflooring](http://www.polyflor.com/distinctiveflooring) and let a world of colour be revealed.





FOR A **HIGH CONTRAST SCHEME** SELECT SEVERAL COLOURS TO WORK IN COMBINATION



## IN THE SPOTLIGHT

**The unique decorative appeal of Pearlazzo PUR puts it in the spotlight.**

The mix of pearlescent flakes adds a depth and vibrancy to the decoration as they appear in a variety of sizes and geometric shapes. In combination with complementary tonal chips, the composition of the decoration adds a new structural dimension to the product. For a product with a different perspective, Pearlazzo PUR is the ideal choice.

**Environmentally Preferable Flooring solutions from Polyflor.**



Working on developments in new decorations and technologies, Polyflor is continually evaluating new ideas and alternatives to minimise any impact on the environment.

Within the new BRE Global rating scheme homogeneous vinyl flooring achieves a generic BRE Global A+ rating for contract applications. Pearlazzo PUR is 100% recyclable and contains 25% recycled material.

The PUR feature also significantly reduces chemical usage and reduces water usage by up to 55% compared to traditional maintenance products.



**A<sup>+</sup>BRE**  
GENERIC  
ENVIRONMENTAL  
RATING

# WHEN COLOUR MATTERS

Accentuate a design feature by unifying the structure and the floor space through colour to create a point of interest.

Ever-popular subtle shades and pale neutrals sit alongside bolder, accent colours in the Pearlazzo PUR palette of 24 individual colour choices.

Meanwhile colour combinations are endless; don't stop at two, choose three or four for dramatic impact as many colours within the range can be paired together.

Colour and decoration, alongside quality and performance are key aspects of a product specification. Indoor air quality is also, quite rightly, a key environmental consideration.

The VOC emissions on Pearlazzo PUR are below the very strictly set, acceptable levels of the AgBB test method showing no negative contribution to indoor air quality.

PEARLAZZO  
DISTINCTIVE  
FLOORING









# A PALETTE OF MANY COLOURS

**Pale neutrals or intense shades.**

**Cool and hot.**

**Field colours meet accent colours.**

**Earth tones or bold bright colours.**

Whatever your interpretation or colour requirements, the Pearlazzo PUR collection has the choice.

Alternatively, add interest by creating a contrast in texture, combining smooth homogeneous Pearlazzo PUR floorcoverings with wood effect grained floorings.



w/r 9703

**9703 Chalk Burst**




w/r 3580

**9721 Sunrise**




w/r 9708

**9708 Alpine Meadow**

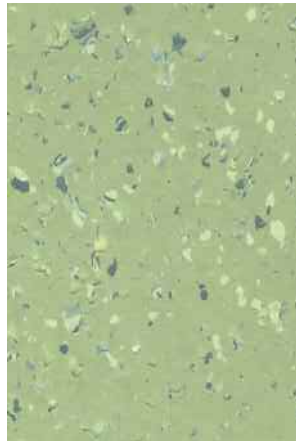

w/r 9706

**9706 Mint Crisp**

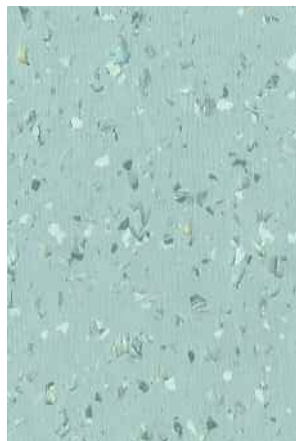


w/r 9719

**9719 Sailcloth**




w/r 9723

**9723 Caramel**

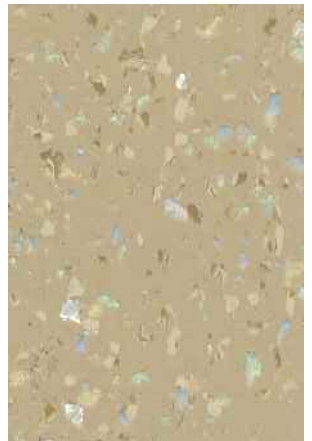

w/r 9710

**9710 Seafoam**















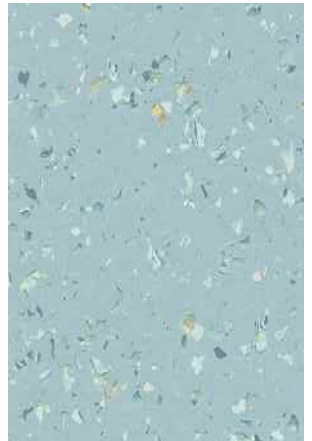


w/r 9707

**9707 Satin Jade**





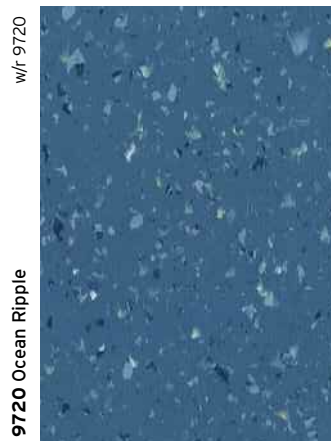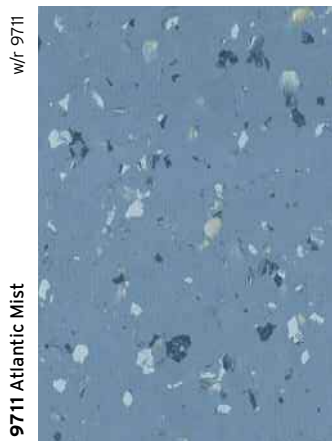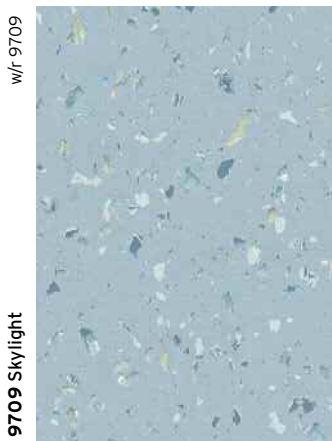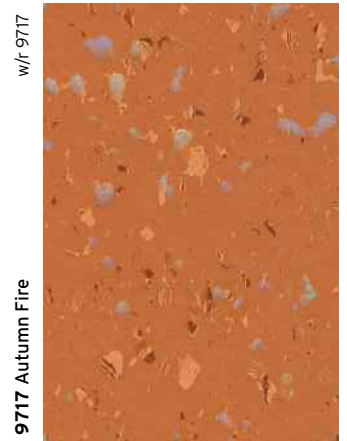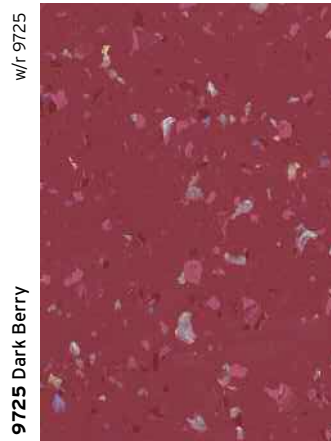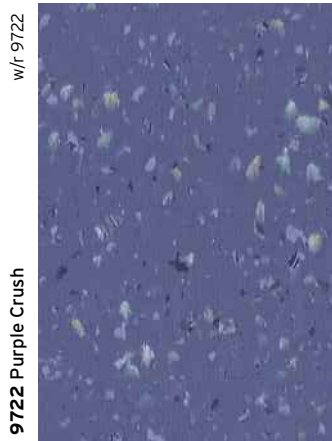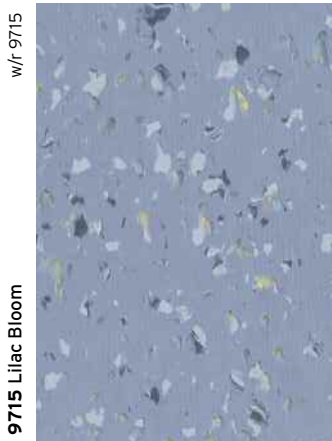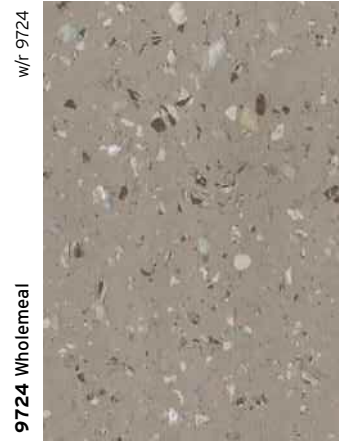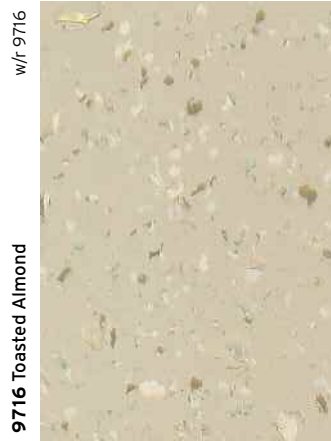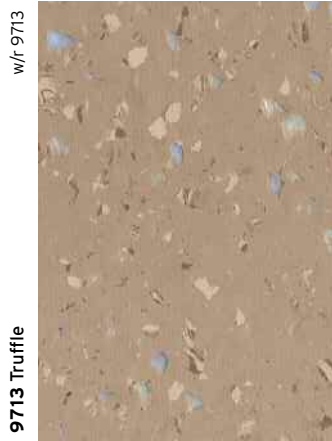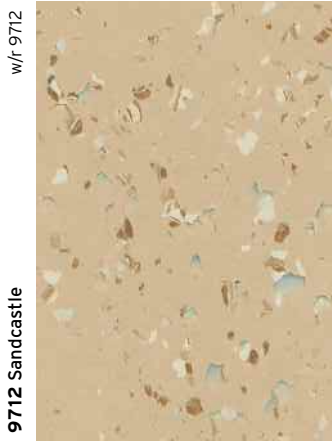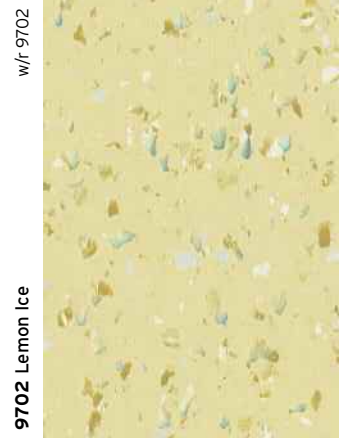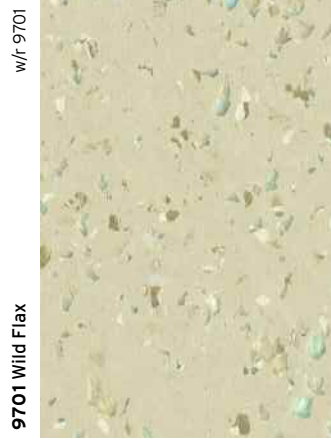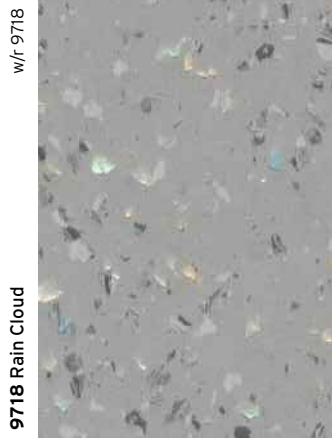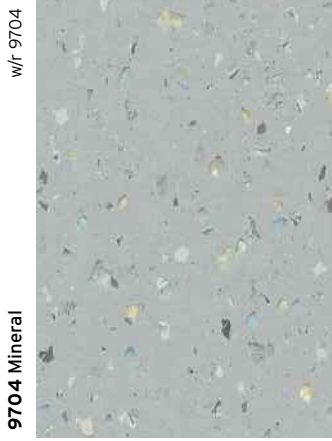

Please note: it is recommended that a larger sample piece is viewed at floor level to appreciate the decoration.  
Due to limitations of colour printing, actual samples should be seen before colour selection is made.

# PEARLAZZO PUR BENEFITS



## Group T abrasion

Polyflor homogeneous PUR ranges demonstrate outstanding durability and abrasion resistance. Pearlazzo PUR achieves the highest wear rating Group T (EN 660 Part 2) and the Use Area Classification of 23/34/43.



## Real long term benefits - protect the look of the floor

As with all homogeneous PUR ranges, Pearlazzo PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.

## Optimum appearance

The polyurethane reinforcement protects the floorcovering by resisting soiling and scuffing. This protection ensures that the intensity of the maintenance and overall cleaning costs are significantly reduced, with savings of up to 48% achievable compared with untreated vinyl flooring.

All maintenance regimes should be tailored to the location and regular and well planned maintenance keeps the floorcovering in pristine condition. Download the typical maintenance regime for Pearlazzo PUR at [www.polyflor.com/pearlazzo](http://www.polyflor.com/pearlazzo)



## Environmentally Preferable Flooring

Polyflor's vast range of products means you can maximise your BREEAM score without any compromise on performance, choice or budget.

Homogeneous vinyl flooring has a generic BRE Global A+ Rating in the Green Guide to Specifications for contract applications.

Pearlazzo PUR is 100% recyclable and contains 25% recycled material.

The PUR feature also significantly reduces chemical usage and reduces water usage by up to 55% compared to traditional maintenance products.

A full Environmental Report detailing Polyflor's achievements in areas such as recycling, energy reduction and waste avoidance can be found at [www.polyflor.com/environment](http://www.polyflor.com/environment)




















## Hygiene

For hygiene critical locations, Pearlazzo PUR has been independently tested and results demonstrate that it inhibits the growth of MRSA on the flooring. An effective cleaning regime is however, the most important defence against infection.

In common with all Polyflor sheet vinyls, Pearlazzo PUR can be welded at the seams and to covered skirting to create continuous, impervious surfaces that offer no sanctuary to dirt and bacteria.



# PEARLAZZO PUR SPECIFICATION

Gauge		2.00mm	
Roll Size		2m x 20m = 40m <sup>2</sup>	
Product Weight		2950g/m <sup>2</sup>	
General Performance		EN 649 ASTM F1913 Agrément – under application	 
Use Area Classification		23, 34, 43	
Reaction to Fire		EN 13501-1 Class Bfl-S1 EN ISO 9239-1 ≥8kw/m <sup>2</sup> EN ISO 11925-2 Pass ASTM E662 <450 ASTM E648 Class 1	
Slip Resistance		EN 13893 Class DS AS/NZS 4586 R9	
Abrasion Resistance		EN 660 Part 2 Group T	
Electrical Behaviour (body voltage)		EN 1815 This product does not accumulate static charges above 2kV and is classified as 'antistatic'. For specialist applications where there is a requirement to dissipate the electrostatic charge, see the Polyflor ESD product ranges.	
VOC Emissions		AgBB VOC test: Pass Floorscore certified (SCS Certificate Reg No: SCS-FS-02034)	
Environmentally Preferable Flooring		Vinyl flooring has a generic BRE A+/A Rating in the Green Guide to Specifications for contract applications. Polyflor Pearlazzo PUR is 100% recyclable and contains 25% recycled material. A full Environmental Report detailing Polyflor's achievements in areas such as recycling, energy reduction and waste avoidance can be found at <a href="http://www.polyflor.com/environment">www.polyflor.com/environment</a>	
Hygiene		This product has been independently tested and results demonstrate that it inhibits the growth of MRSA on the flooring. An effective cleaning regime is however, the most important defence against infection.	
Maintenance		Pearlazzo PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.	
Applications		Polyflor Pearlazzo PUR is recommended for heavy traffic areas that require a hardwearing floorcovering which is attractive, modern and easy to maintain. Such areas include banking halls, retail showrooms, department stores, hotels, restaurants, leisure centres, universities, hospitals, health clinics, libraries, commercial offices and public reception areas.	
Notes		Polyflor homogeneous PUR ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For clarification and for information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Polyflor Customer Technical Services on +44 (0)161 767 1912 or email <a href="mailto:tech@polyflor.com">tech@polyflor.com</a> .	

Polyflor Australia Pty Ltd  
59-65 Wedgewood Road, Hallam,  
Vic 3803, Australia  
Tel: 1800 777 425  
E-mail: sales@polyflor.com.au

Polyflor Canada  
304 Stone Road West, Suite 550  
Guelph, Ontario, N1G 4W4 Canada  
Tel: +1 519 763 3088  
E-mail: acrawford@polyflor.ca

Polyflor Contract Ltd  
Office 12, Business centre "Strela",  
d. 113, liter B, Ligovsky pr.,  
St.Petersburg, Russia.  
Tel: +7 812 332 42 02  
E-mail: sales@polyflor.ru

Polyflor Hong Kong  
Room 2409, 24th Floor,  
New York Life Tower, Windsor House,  
311 Gloucester Road,  
Causeway Bay, Hong Kong  
Tel: +852 2865 0101  
E-mail: anthonylam@polyflor.com.hk

Polyflor Ireland  
Unit 106, Millennium Trade Park,  
Ballycoolin, Blanchardstown, Dublin 11  
Tel: +353 (1) 864 9304  
E-mail: tmockler@polyflor.com

Polyflor Middle East  
PO Box 71862, Dubai, UAE  
Tel: +971 4 349 1078  
E-mail: espm@eim.ae

Polyflor Nordic  
Kjelsåsveien 168 B, N-0884 Oslo, Norway  
Tel: +47 23 00 84 00  
E-mail: firmapost@polyflor.no

Polyflor Polska  
Ul Gronowa 22/506, Poznan 61-680,  
Poland  
Tel: +48 61 820 3155  
E-mail: polyflor@polyflor.com.pl

Poly Sales Africa (Pty.) Ltd  
PO Box 3967, Edenvale 1610,  
South Africa  
Tel: (27) 011 609-3500  
E-mail: info@polyflor.co.za

FalckDesign AB  
Energigatan 9, SE-434 23 Kungsbacka,  
Sweden  
Tel: +46 (0) 300 15820  
E-mail: info@falckdesign.com

James Halstead Flooring New Zealand Ltd  
PO Box 98943, Manukau City 2241  
100 Plunket Ave, Manukau 2104  
New Zealand  
PH: 0800 425 783  
E-mail: sales@halstead.co.nz

objectflor Art und Design Belags GmbH  
Wankelstraße 50, 50996 Köln, Germany  
Tel: +49 (0) 2236 966 330  
E-mail: info@objectflor.de

For details on distribution for other countries,  
as well as up to date product and technical  
information, please visit  
**WWW.POLYFLOR.COM**



**POLYFLOR LTD.** PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK  
TEL: +44 (0)161 767 1111 UK SALES DIRECT: +44 (0)161 767 1122 UK SAMPLE REQUESTS: +44 (0)161 767 2551  
EXPORT SALES DIRECT: +44 (0)161 767 1913 TECHNICAL SUPPORT: +44 (0)161 767 1912  
UK FAX: +44 (0)161 767 1128 EXPORT FAX: +44 (0)161 767 1166  
E-MAIL: INFO@POLYFLOR.COM WEBSITE: WWW.POLYFLOR.COM

*James Halstead*  
FLOORING

