

SIMX WHISPERVENT CENTRIFUGAL CEILING FANS

WVC MODELS

STANDARD MODELS

| Duct Size | Model | Colour | Performance | Order Code |
|-----------|---------|-----------|--------------------------------|------------|
| 100mm | WVC100W | White | 63 l/s, 225m ³ /hr | FAN0884 |
| 100mm | WVC100S | Stainless | 63 l/s, 225m ³ /hr | FAN0885 |
| 150mm | WVC150S | White | 101 l/s, 364m ³ /hr | FAN2465 |

- Designed for apartments where space is limited, these ceiling mounted centrifugal fans can be installed in confined spaces.
- The centrifugal fan design assists 'whisper quiet' operation.
- Reliable long lasting ball bearing motor.
- FAN0884 & FAN0885 supported by a 2 year warranty.
- FAN2465 supported by a 3 year warranty.



Simx WhisperVent 100 - Silver




Simx WhisperVent 100 - White



Simx WhisperVent 150 - White


DIMENSION INFORMATION (MM)

| Model | A | B | C | D |
|-----------------|-----|-----|-----|-----|
| WhisperVent 100 | 245 | 240 | 280 | 290 |
| WhisperVent 150 | 315 | 330 | 355 | 370 |

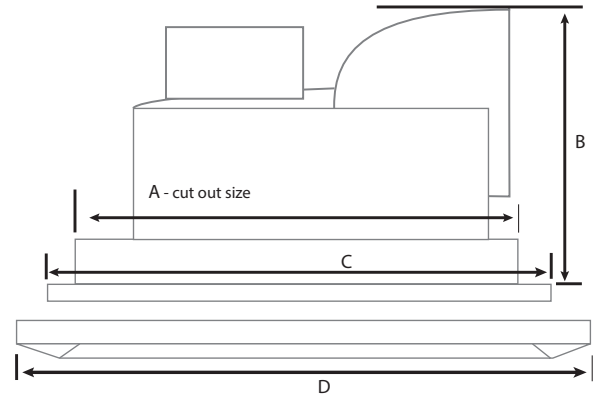


TECHNICAL SPECIFICATION & PERFORMANCE DATA

| Model | WhisperVent 100 | WhisperVent 150 |
|---------------------|-------------------------------|--------------------------------|
| Power | 220 - 240V | 220 - 240V |
| Fan Performance | 63 l/s, 225m ³ /hr | 101 l/s, 364m ³ /hr |
| Fan Wattage | 30W | 42W |
| Maximum Pressure | 105 Pa | 145 Pa |
| Fan Speed | 2500 RPM | 2500 RPM |
| Sound Level | 38 dB(A) | 44 dB(A) |
| Max. Operating Temp | 40°C | 40°C |
| IP Rating | IPX4 | IPX4 |

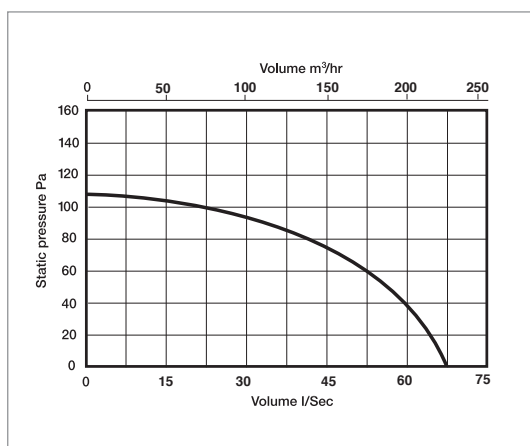

Performance - WhisperVent 100

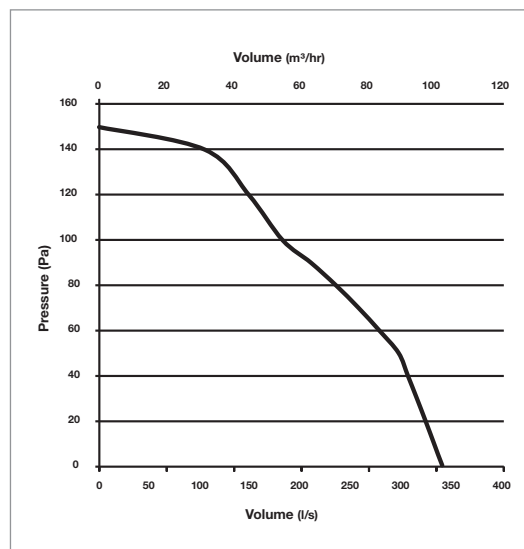

Performance - WhisperVent 150