

FEATURE PLANK SPECIFICATION SHEET

Moda Stretto Collection Engineered T&G plank by Forté. 15mm thick, 138mm wide, 2190mm length. Direct stick installation method onto substrate. Feature grade, prefinished with NatureMatte Lacquer











Tuscany







Dolcedo

PRODUCT DETAILS

Collection Moda Stretto
Product Type Engineered Plank

Availability Stocked (Amalfi, Tuscany & Como

are custom order)

Total Thickness 15mm
Width 138mm
Length 2190mm
% of Shorts Up to 33%

Wear Layer 4mm Solid European Oak

Core Hevea and Pine
Backing Layer Spruce Veneer
Construction 3-layer Engineered

Re-sands Up to 2 (approx. 1mm removed per

re-sand)

Surface Texture Brushed

Surface Sheen Extra Matte (4-6%)

Bevel Micro bevel 4 sides

Status Pre-finished

(no additional coats required)

Finish NatureMatte Lacquer (7 coats)

Species European Oak

Wood Grade Feature (refer page 2 for details)

Filler Colour Dark

The Moda Stretto Collection is also available in light feature grade (selected colours). Matching stair nosing and herringbone is available from the Moda Altro Collection.

STRUCTURAL WARRANTY

5 Year Commercial For terms and conditions see25 Year Residential www.forte.co.nz/warranties

SUSTAINABILITY

PEFC® Certified

INSTALLATION

Installation Method Glue down

Suitable Substrates Plywood, Particle Board, Concrete,

existing timber - enquire for others

(Double Stick for Multi-level)

Joint Profile Tongue and Groove (4 sides)

Suitable Applications Flooring, Walls, Ceilings

Suitable Uses Residential homes, hospitality, retail stores, restaurants, apartments

Underfloor Heating · Hydronic Systems

• Electric Systems set in screed (ensure screed suitable for UFH) -

enquire for others

Wet Area Suitability Contact the Forté team for information

0508 35 66 77

TECHNICAL SPECIFICATIONS

Reaction to Fire (Floors) Critical Flux 5.0kw/m²

Reaction to Fire (Walls Group 3 / Class Dfl-s1 (Group 1 can

and Ceilings) be achieved with intumescent coating)
Wear Layer Density 700kg/m³

Formaldehyde Emission

AS/NZS 2098.11 E0 (0.1mg/L)

Low VOC, No added Formaldehyde

Slip Ratings


AS/NZS 4586 Wet Test Classification F, Mean COF 0.60
AS/NZS 4586 Dry Test Classification X, Pendulum Mean 43

BPN

PACK INFORMATION

Pack Size 1.813m²
Pack Weight 18.30kg

Pieces per pack 4 full planks + 2 split planks

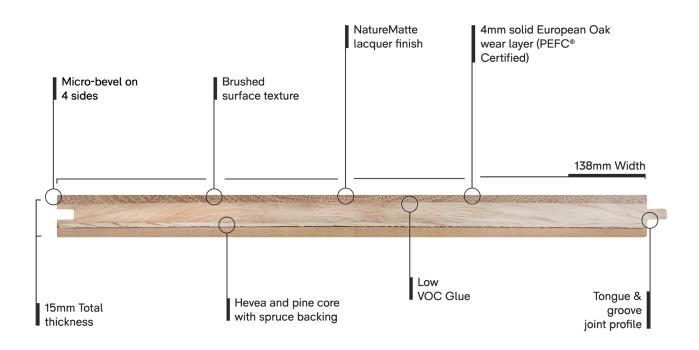

MODA STRETTO - FEATURE GRADE



A Moda Stretto Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA STRETTO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Stretto Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA STRETTO 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Stretto Collection comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA STRETTO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Stretto timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation