


1.0 - Product Overview

SLABX200 is EXPOL's new generation high performance Expanded Polystyrene Board (EPS) specifically designed to deliver high compressive strength and improve insulation under concrete slabs.

It delivers an uncompromised compressive strength of 200kPa @ 10% deformation and exceptional Insulation Values. Specifically engineered for residential and commercial projects, its high performance gives engineers and specifiers peace of mind while increasing the thermal performance of a building.

EXPOL – SLABX200's durable nature means it will not degrade over time keeping its integrity for the life of the structure.

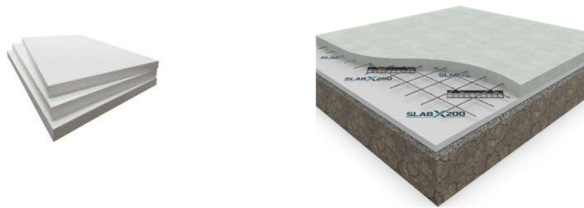

2.0 - Installation

2.1 There are no special requirements for PPE when handling or installing EPS. It is an inert, non-toxic material.

2.2 When transporting, storing or installing, ensure the EPS is not exposed to:

- Petroleum based solvents, or
- Fire, or
- Sustained direct sunlight.

2.3 PVC sheathed electrical cables should not be allowed direct contact with EPS.

2.4 EPS is compatible with all common construction products.

3.0 - Maintenance

3.1 No maintenance required

For further technical information please contact us.

P: +64 9 634 3449 F: +64 9 634 0756 T: 0800 86 33 73 E: tech@expol.co.nz W: www.expol.co.nz

4.0 - Warranty

EPS, when installed and maintained in accordance with the requirements outlined in this technical data sheet, will meet or contribute to meeting the following provisions of the New Zealand Building Code:

We believe we manufacture and supply the highest quality UnderFloor, EPS and XPS Foam Insulation products and that is why we stand behind them with some of the best warranties in the industry.

4.1 We provide a 20-year warranty on our EPS Foam Insulation Products – for full warranty details visit www.expol.co.nz/expol-eps-warranty/

5.0 - Compliance with the New Zealand Building Code

- 5.1 Clause B2 Durability, performance B2.3.1 (a), B2.3.1(b)
- 5.2 Clause E3 Internal moisture performance E3.3.1
- 5.3 Clause F2 Hazardous building materials performance F2.3.1(a)

EXPOL EPS is not subject to a warning or ban under the Building Act 2004.

6.0 - Quality Assurance

- 6.1 BRANZ, H1 Energy efficiency performance H1.3.1(a), H1.3.2(e)

EXPOL SLABX200 – TECHNICAL DATA SHEET

7.0 - Technical Data

Properties	Test / Method / Standard	Test Results
Material	Expanded Polystyrene	
Density	-	
Sheet Size	2400 mm x 1200 mm	
Thickness / R Value	40mm	R 1.22
	50mm	R 1.50
	60mm	R 1.81
	75mm	R 2.20
	100mm	R 3.00
	150 mm	R 4.50
	200 mm	R 6.00
Thermal Conductivity	ATSM 168	K – Value 0.034
Rate of water vapour transmission (max) measured parallel to rise at 23 deg C	AS 2498.5	- mg/m2s
Permeability m/s	-	
Compressive Resistance KPA at 1%	AS 2498.3	85 KPA
Compressive Resistance KPA at 2%		144 KPA
Compressive Resistance KPA at 5%		183 KPA
Compressive Resistance KPA at 10%		200 KPA
Youngs Modulus	-	- MPA
Cross breaking strength KPA	AS 2498.4	- KPA
Dimensional stability of length, width & thickness (max) at 70 deg C for 7 days	AS2498.6	- %
Long term water absorption by immersion	ASTM C72	- %v / v
Determination of flame propagation surface ignition	AS2122.1-1993	
Medium flame duration (max)		2 sec
Eighth vale		3 sec
Fire behavior	AS/NZS 1530.3:1999	
Spread of flame index (0 – 10)		0
Smoke developed index (0 – 10)		5
Recycled Content	0%	
Recyclability	EPS is 100% recyclable	
Environmental Statement	EPS is inert and non-toxic. There are no chemicals or gases harmful to the environment emitted from EPS either during manufacture or within use.	
Ozone Depleting Potential	EPS does not contain ozone-depleting CFC or HCFC gases, nor use them in its manufacture. As a result, EPS has zero ozone depletion potential.	
Vermin Resistance	EPS does not offer any nutritive value.	

For further technical information please contact us.

P: +64 9 634 3449 F: +64 9 634 0756 T: 0800 86 33 73 E: tech@expol.co.nz W: www.expol.co.nz