

Sherwood Collection

**Please note: that there are 2 different datasheets within this range.
This is due to the thickness of the vinyl.**

Range 1 Data Information

Width: 2m & 3m

Wear Layer: 0.30mm

Warranty: 10 Years

Slip Resistance: R10



Lime Oak 609M



Cracked Oak 690M



Cracked Oak 196L



Water Oak 676L



Water Oak 694M



Havanna Oak 696L



Lime Oak 719L



Lime Oak 909L
*Lime Oak 909L is available in 2m
and 4m wide only*



Havanna Oak 696L

Sherwood Range 1 | Technical Data Sheet

Please note that the data given could be imprecise and liable to modifications of a technical nature at any time. The information in these documents is valid from 01/01/2017 and Beaulor reserve the right to make changes at any moment and without prior notice. Our technology is constantly evolving, so before carrying out any projects we encourage you to contact us to maintain our highest level of standards.

Product Information

Norm	EN ISO 26986		* check individual ref. for available widths	
Intensity of use	ISO 10874 (EN 685)		23 High domestic 32 General commercial use	class
Total Thickness	EN ISO 24346 (EN 428)		3,20	mm
Wearlayer	EN ISO 24340 (EN 429)		0,30	mm
Abrasion group	EN 660-2		T	class
Total weight	EN ISO 23997 (EN 430)		2000	g/m ²
Standard width	EN ISO 24341 (EN 426)		2 - 3 - 4 *	m
Standard length	EN ISO 24341 (EN 426)		30 - 35	m

Technical Information

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40	%
Curling	EN ISO 23999		≤ 8	mm
Light stability	EN ISO 105 B02		≥ 6	degree
Residual indentation	EN ISO 24343-2 (EN 433)		0,35	mm
Impact sound improvement	EN ISO 717/2		Δ Lw 19	dB
Dynamic coefficient of friction	EN 13893		> 0,6	
Slip resistance (ramp test with oil)	DIN 51130		R10	scale
Reaction to fire Report number ---- VNLF 031380.4	EN 13501-1		Bfl/S1	class
Underfloor heating	EN 12667		Suitable	
Thermal resistance	ISO 8302		0,030	m ² /Kw
Thermal conductivity	EN 12524		0,11	W/m.K
Chemical resistance	ISO 26987 (EN 423)		ok	
Static Electrical Propensity	EN 1815		< 2kV	On concrete

Environment



100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers



E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m³ of air)

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.



Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)





100% phthalate free
*for all products produced from May 2017 onwards



Product Build

1. PU lacquer
2. Wear layer
3. Design layer
4. Foam layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

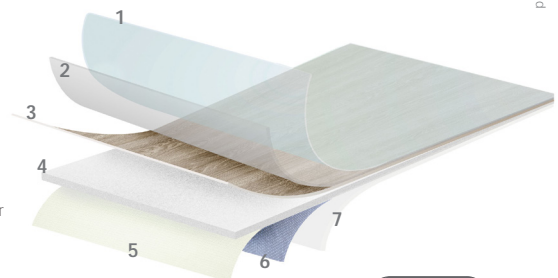

Features



Sherwood Collection

**Please note: that there are 2 different datasheets within this range.
This is due to the thickness of the vinyl.**

Range 2 Data Information

Width: 2m & 3m

Wear Layer: 0.25mm

Warranty: 10 Years

Slip Resistance: R10



Fumed Oak 262L



Fumed Oak 266L



Havanna Oak 634M



Fumed oak 266L

Sherwood Range 2 | Technical Data Sheet

Please note that the data given could be imprecise and liable to modifications of a technical nature at any time. The information in these documents is valid from 01/01/2017 and Beaulor reserve the right to make changes at any moment and without prior notice. Our technology is constantly evolving, so before carrying out any projects we encourage you to contact us to maintain our highest level of standards.

Product Information

Norm	EN ISO 26986			* check individual ref. for available widths
Intensity of use	ISO 10874 (EN 685)		23 High domestic 31 Moderate commercial use	class
Total Thickness	EN ISO 24346 (EN 428)		2,25	mm
Wearlayer	EN ISO 24340 (EN 429)		0,25	mm
Abrasion group	EN 660-2		T	class
Total weight	EN ISO 23997 (EN 430)		1700	gr/m ²
Standard width	EN ISO 24341 (EN 426)		4 - 5 *	m
Standard length	EN ISO 24341 (EN 426)		25	m

Technical Information

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40	%
Curling	EN ISO 23999		≤ 8	mm
Light stability	EN ISO 105 B02		≥ 6	degree
Residual indentation	EN ISO 24343-2 (EN 433)		0,35	mm
Impact sound improvement	EN ISO 717/2		Δ Lw 13	dB
Dynamic coefficient of friction	EN 13893		> 0,6	
Slip resistance (ramp test with oil)	DIN 51130		R10	scale
Reaction to fire Report number ---- VNLf 031380.4	EN 13501-1		Bfl/S1	class
Underfloor heating	EN 12667		Suitable	
Thermal resistance	ISO 8302		0,020	m ² /Kw
Thermal conductivity	EN 12524		0,11	W/m.K
Chemical resistance	ISO 26987 (EN 423)		ok	
Static Electrical Propensity	EN 1815		< 2kV	On concrete

Environment



100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers



E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m³ of air)

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.



Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)



100% phthalate free
*for all products produced from May 2017 onwards




Belgium plant
Certifié
ISO
14001

Slovenian plant
Certifié
ISO
9001

Product Build

1. PU lacquer
2. Wear layer
3. Design layer
4. Foam layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

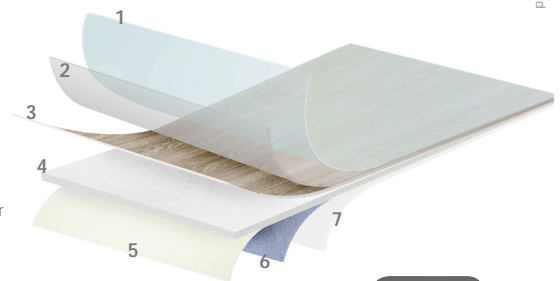

Features

