

Espan 340TM / 470TM

PRICKLE DETAILS

DETAIL LIST

		<u>Revision</u>	<u>Date</u>
00 / 00	COVER SHEET		
01 / 03	ROOF RIDGE	3.0	14.12.2018
02 / 03	SAWTOOTH RIDGE	3.0	14.12.2018
03 / 03	MANSARD	3.0	14.12.2018

*PRICKLES ACCEPTABLE ON MINIMUM 10° PITCH AND ABOVE.
FOR PRICKLES BELOW 10°, PLEASE CONSULT METALCRAFT
ON SUITABILITY

RIB CUT AND FOLDED OVER RIDGE

PRE-FINISHED PRICKLE FLASHING

METALCRAFT ESPAN™
ROOFING

PRE-FINISHED POP RIVET
BEDDED IN SILICONE OR
PRE-FINISHED 8g WAFER-
TEK SCREW


MIN. ROOF PITCH = 10°

PERMEABLE WALL
UNDERLAY, SHOWN
DASHED

PURLIN

METALCRAFT ESPAN™ CLIP
SYSTEM WITH 12G x 35mm
SCREWS

ROOF FRAMING

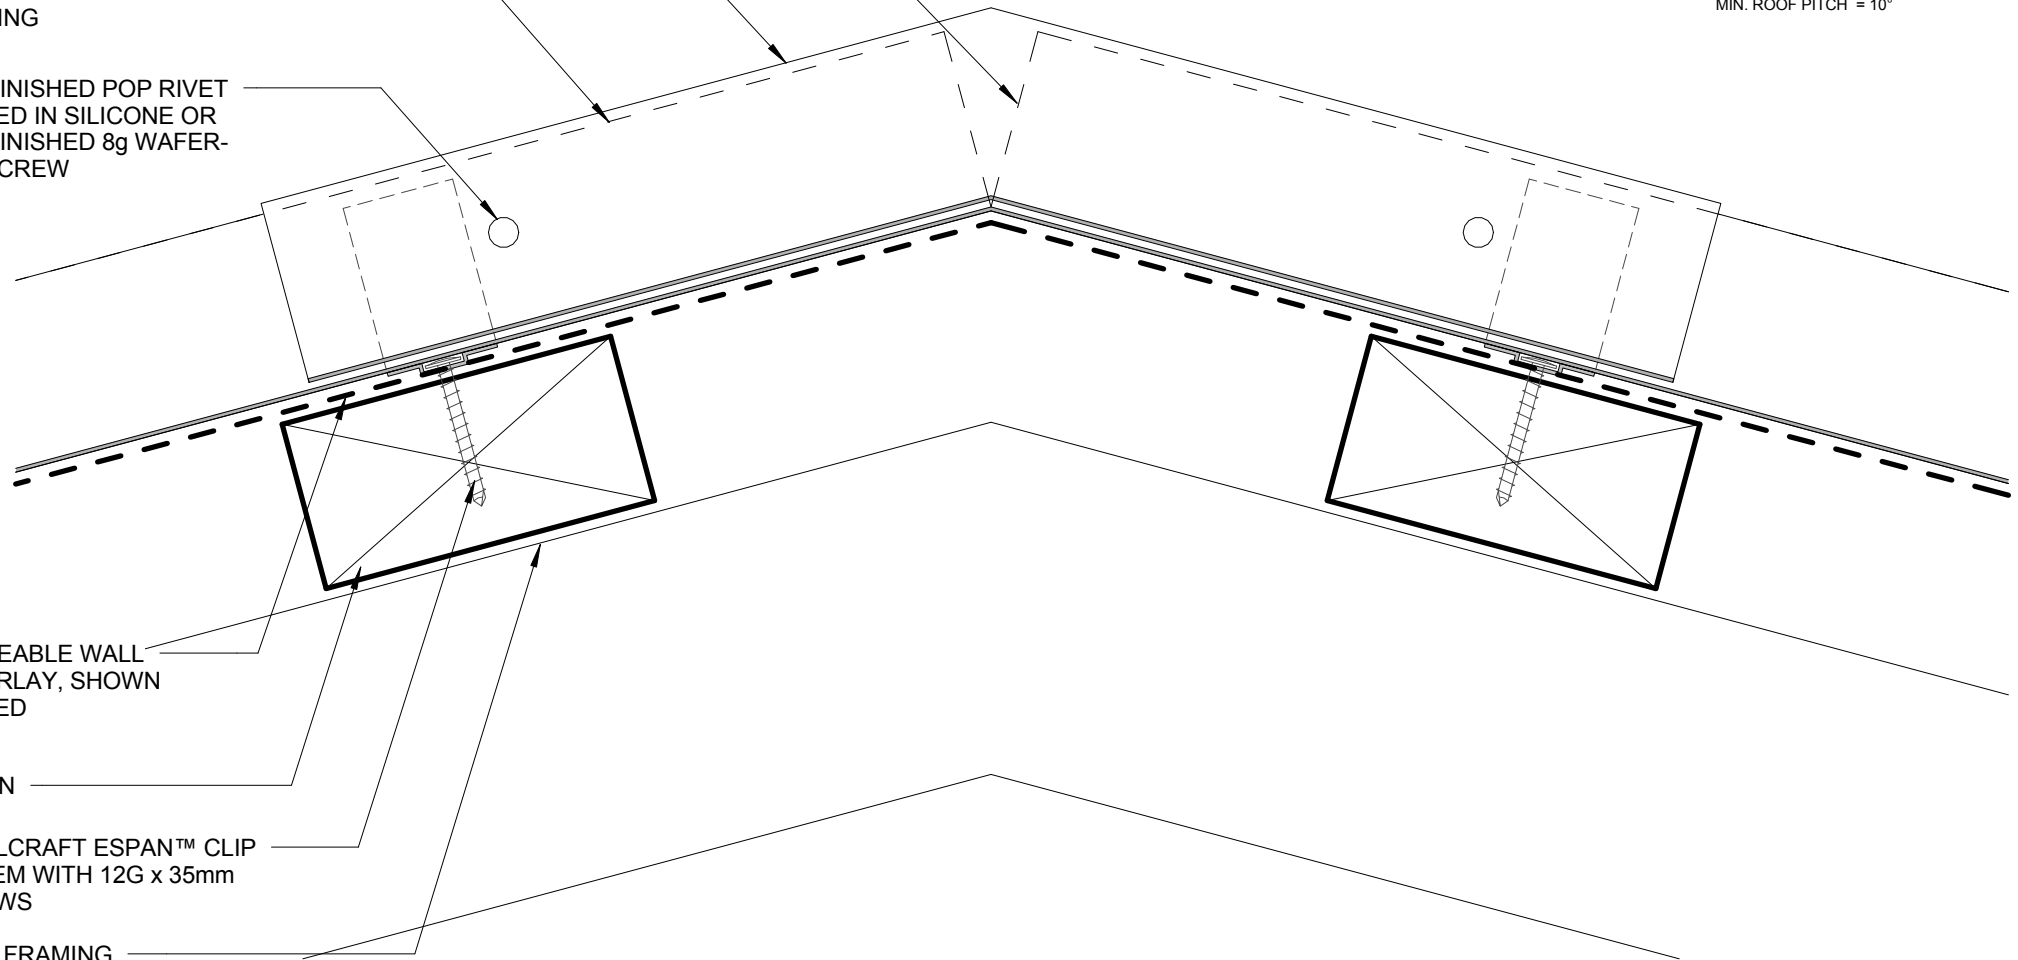

PRE-FINISHED PRICKLE FLASHING

RIB CUT AND FOLDED OVER RIDGE

SECONDARY FLASHING

PRE-FINISHED POP RIVET
BEDDED IN SILICONE OR PRE-FINISHED 8g WAFER-TEK SCREW

20mm CAVITY BATTEN

PERMEABLE WALL UNDERLAY,
SHOWN DASHED

ROOF OR WALL
FRAMING

MIN. ROOF PITCH = 10°

METALCRAFT ESPAN™ ROOFING

PURLIN

METALCRAFT ESPAN™
CLIP SYSTEM WITH 12G
x 35mm SCREWS

